


CHOTEST TECHNOLOGY INC.

- ❑ Flash Measuring Machine
- ❑ 3D Optical Surface Profilometer
- ❑ Intelligent Profilometer
- ❑ Universal Length Measuring Machine
- ❑ Automated Dial Indicator Testing Machine
- ❑ Contour & Roughness Measuring Machine

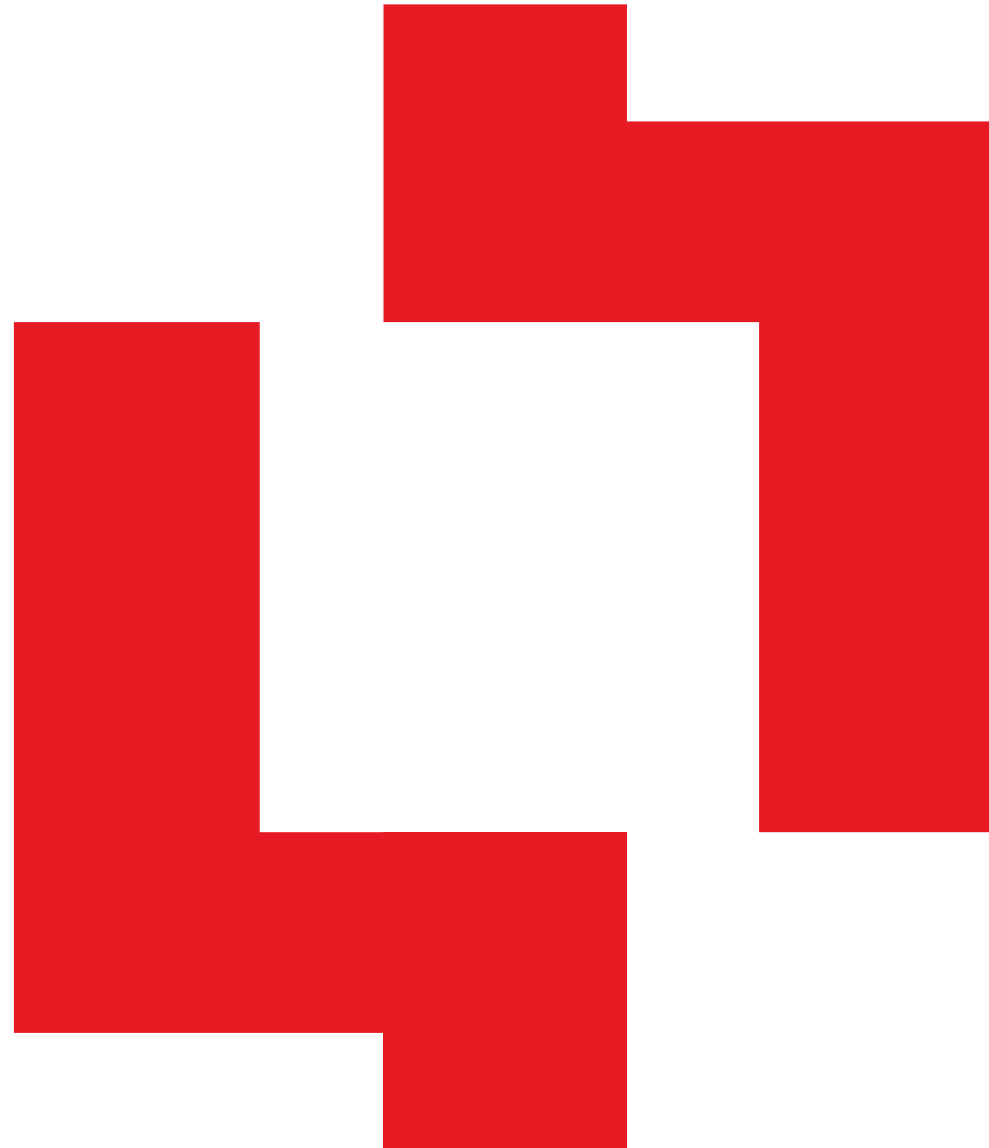

PRODUCT CATALOGUE

From **nanometer** to **hectometer**
we provide professional precision measurement solutions



Quality and Service comes as our standard



Since established in 2002, Chotest Technology Inc. is focusing on the designing and manufacturing of precision dimensional measurement and calibration instruments.

With more than decade professional technology accumulation, Chotest has accumulated rich practical experience and set up a strong team who is specialized in optics, machinery, electronics and information technology. At present, CHOTEST has more than 100 technology patents and software intellectual property rights. With competence in Micro-Nano motion, 3D Reconstruction of Micro-Nano

measurement, 3D Form and Surface Analysis of Micro-Nano measurement, Large-scale 3D Measurement, Precision Sensing Probe and Image processing technology, Chotest is capable to provide the customers with professional precision measurement solution in domains from Nanometer to Hectometer.

Our products are widely used by public metrology labs and quality inspection workshops in the automotive, aerospace, machinery, metallurgy, power, and petrochemical industries. Chotest's service network is covered more than 30 provinces in China, and is also focusing on the development in overseas markets like Europe and APAC. The goal of Chotest is to provide high-end dimensional measurement equipment to manufacturing industry all over the world.



Optical Measurement Instruments

P19

Video Measuring Machine CHT Series	P21	Confocal Microscope VT6000 Series	P67
Video Measuring Machine Novator Series	P33	Scanning Electron Microscope CEM3000A ...	P71
Flash Measuring Machine VX Series	P37	Laser Tracker GTS3000 Series	P79
Flash Measuring Machine Hybrid Series	P55	Laser Tracker GTS6000 Series	P80
3D Optical Surface Profilometer SuperView W1	P57	Laser Interferometer SJ6000	P81
3D Optical Surface Profilometer SuperView W3	P61	Rotary Axis Calibrator WR50	P85
3D Optical Surface Profilometer SuperView WT Series	P63	Wireless Ballbar MT21	P89
White Light Interferometer Probe SuperView WX100	P65		

Contact Measurement Instruments

P91

Coordinate Measuring Machine (CMM)	P93	Profilometer SJ5760 Series	P119
Intelligent Profilometer SJ5780 Series	P109	Economic Profilometer SJ5718 Series	P123
Profilometer for Optics Surface SJ5720-OPT Series	P111	Stylus Nano Profiler NS200	P125
Profilometer SJ5730 Series	P115	Machine Tool Probe PO Series	P127

Professional Inspection Equipment

P129

Unpatterned Wafer 3D Inspection System WD4000	P131
--	------


Dimensional Calibrators

P135

Universal Length Measuring Machine SJ5100 Series	P137	Automated Dial Indicator Testing Machine SJ2000 Series	P145
Universal Thread Measuring Machine SJ5200 Series	P143		
Universal Thread Measuring Machine SJ5500 Series	P144		

From **nanometer** to **hectometer**

we provide professional precision
measurement solutions

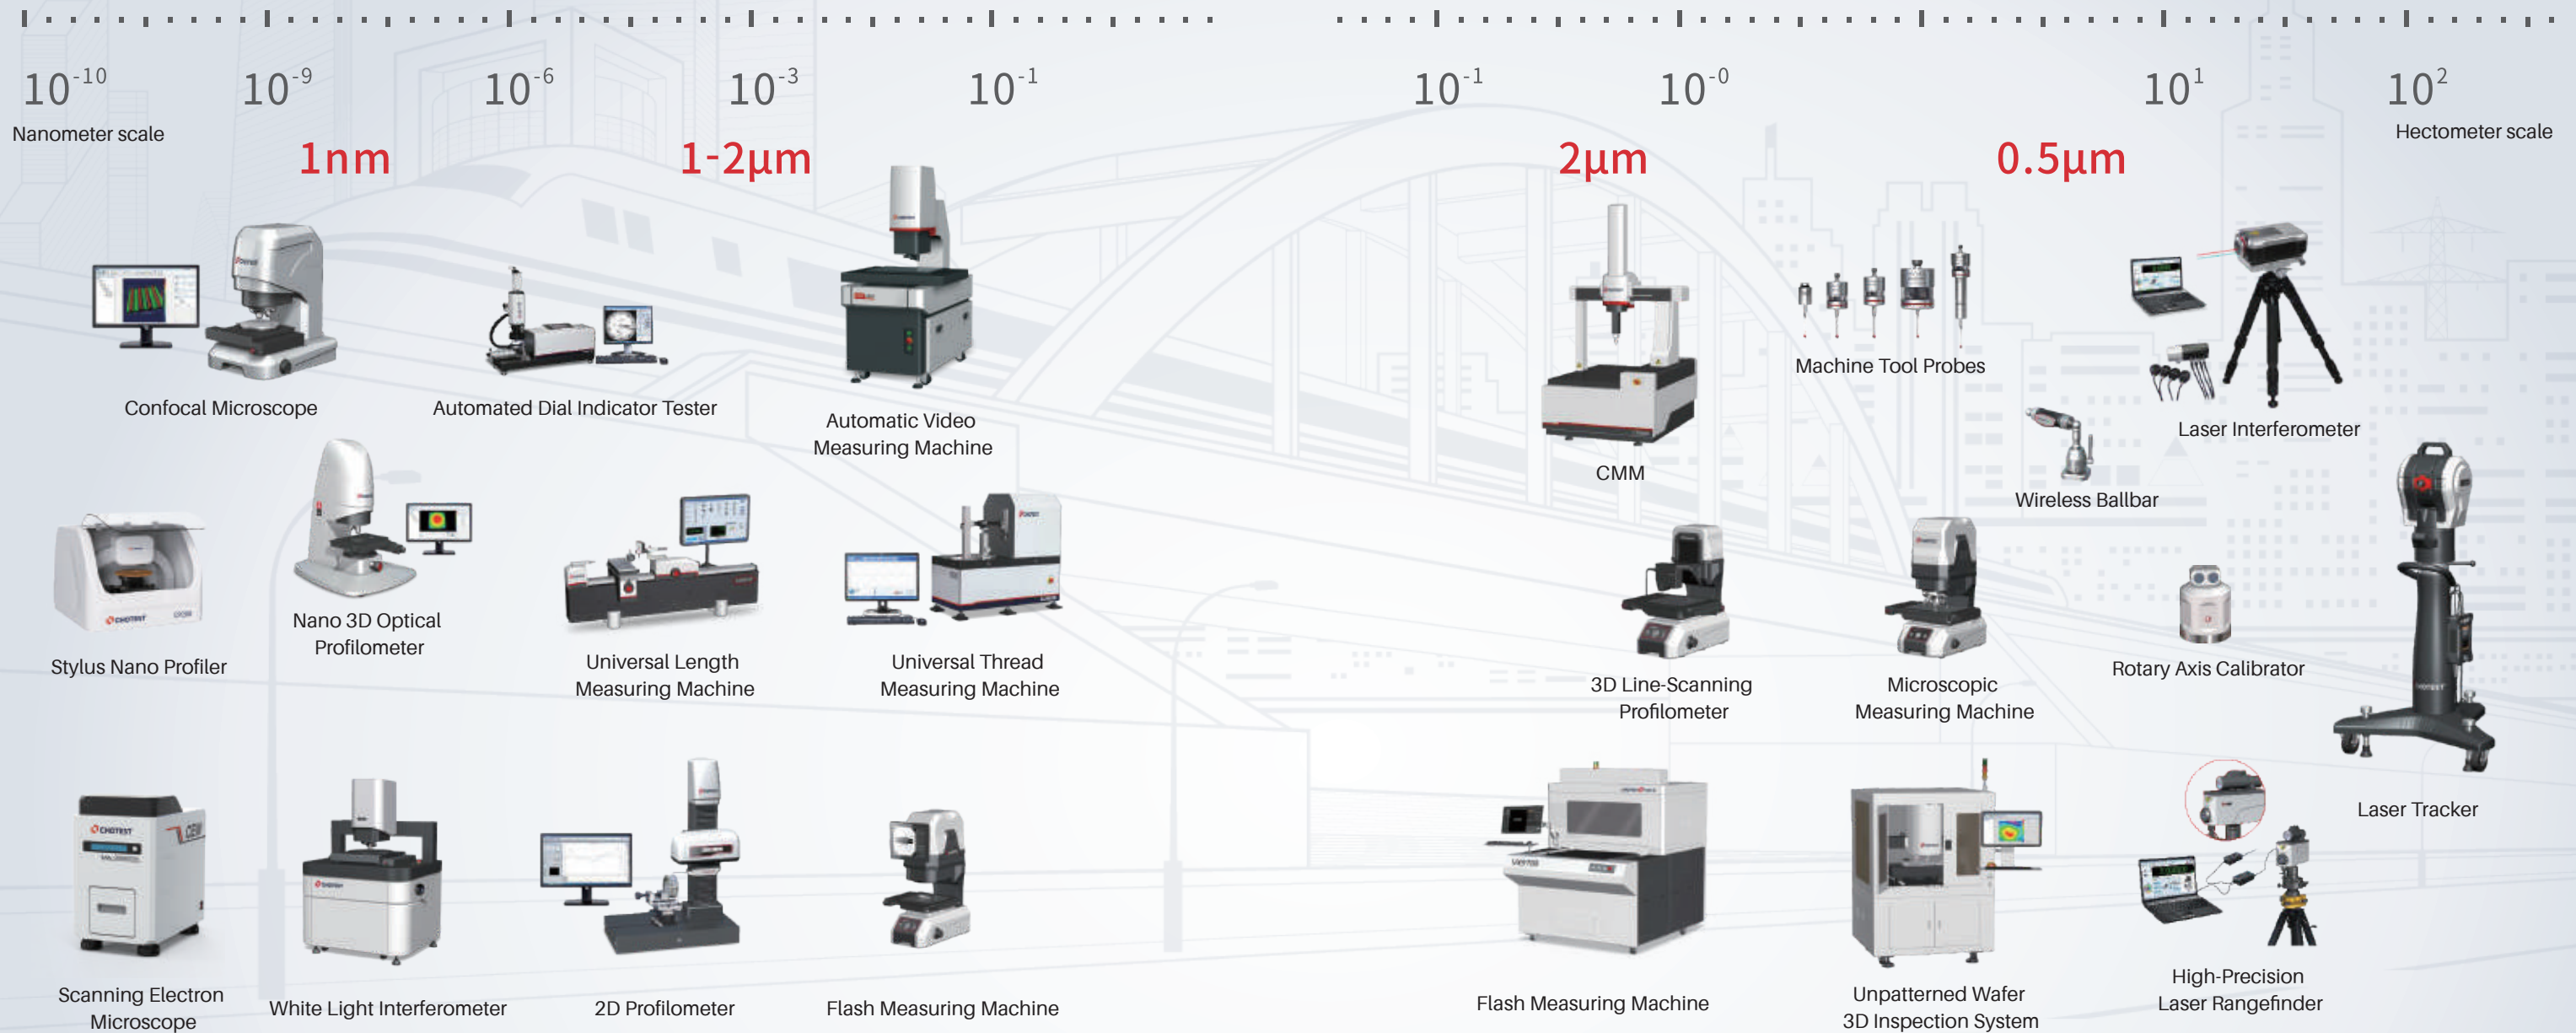

Measurement Solutions for Full-Scale Chain

We are committed to providing full-scale chain solutions for different customers and different industries. With our expertise, technologies, various instruments and software, we can reduce costs and increase efficiency for our customers, at the same time, continuously improve product quality, which helps customers to enhance their market competitiveness.




Aviation/Aerospace/Shipbuilding Industry Application



Automotive/New Energy Industry Application



3C Electronics Industry Application

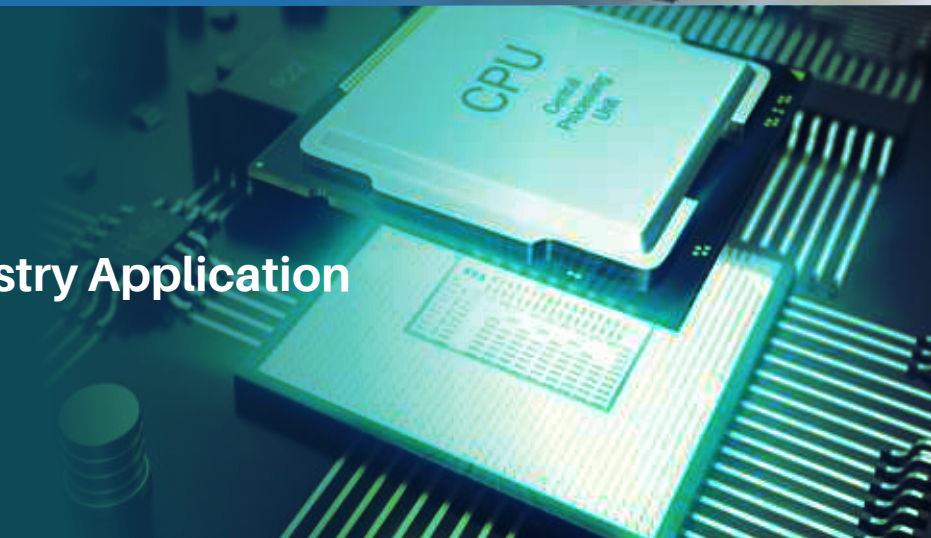

Semiconductor Industry Application





Aviation/Aerospace/Shipbuilding Industry Application

As an important part of the equipment manufacturing industry, the aerospace and shipbuilding industry is an important field for implementing the innovation-driven development strategy and an important support for building a manufacturing power. Chotest provides a full range of dimension measurement solutions in the industrial chain system including the whole machine manufacturing, power system, key components, key basic materials, etc



As an important part of the equipment manufacturing industry, the aerospace and Shipbuilding industry is an important field for implementing the nnovation-driven development strategy and an important support for building a manufacturing power. Chotest provides a full range of dimension measurement solutions in the industrial chain system including the whole machine manufacturing, power system, key components, key basic materials, etc.

P109



For parts such as aero-engines and gear blades, Chotest Coordinate Measuring Machines can provide high-efficient and precise dimensional inspection

P93



With the high measurement accuracy and large measurement range, Chotest GTS laser tracker is used in various assembly application scenarios such as airplane & rocket & vessel assembly and profile measurement.

P79




Chotest Video Measuring Machines/Flash Measuring Machines support non-contact fast and magnified measurement. The software Vision X has more than 90 measurement functions, and has special measurement tools for sealing rings, springs, gears, threads and other workpieces. It can perform simple, fast and accurate measurement, and it is the best measurement method for small parts or small-size features, thin-walled parts, and soft parts.

P21/P37




Chotest high-precision Profilometer SJ5730, with 2 in 1(roughness and profile) measurement module, is often used to measure the surface profile shape and roughness of the engine fuel nozzles and engine crankshaft connecting rods.

P115



Chotest universal length measuring machine SJ5100 is often used to calibrate measuring gauges in aerospace metrology labs and to measure the ultra-high-precision piston rods, which is one of the core components of aero- engines.

P137

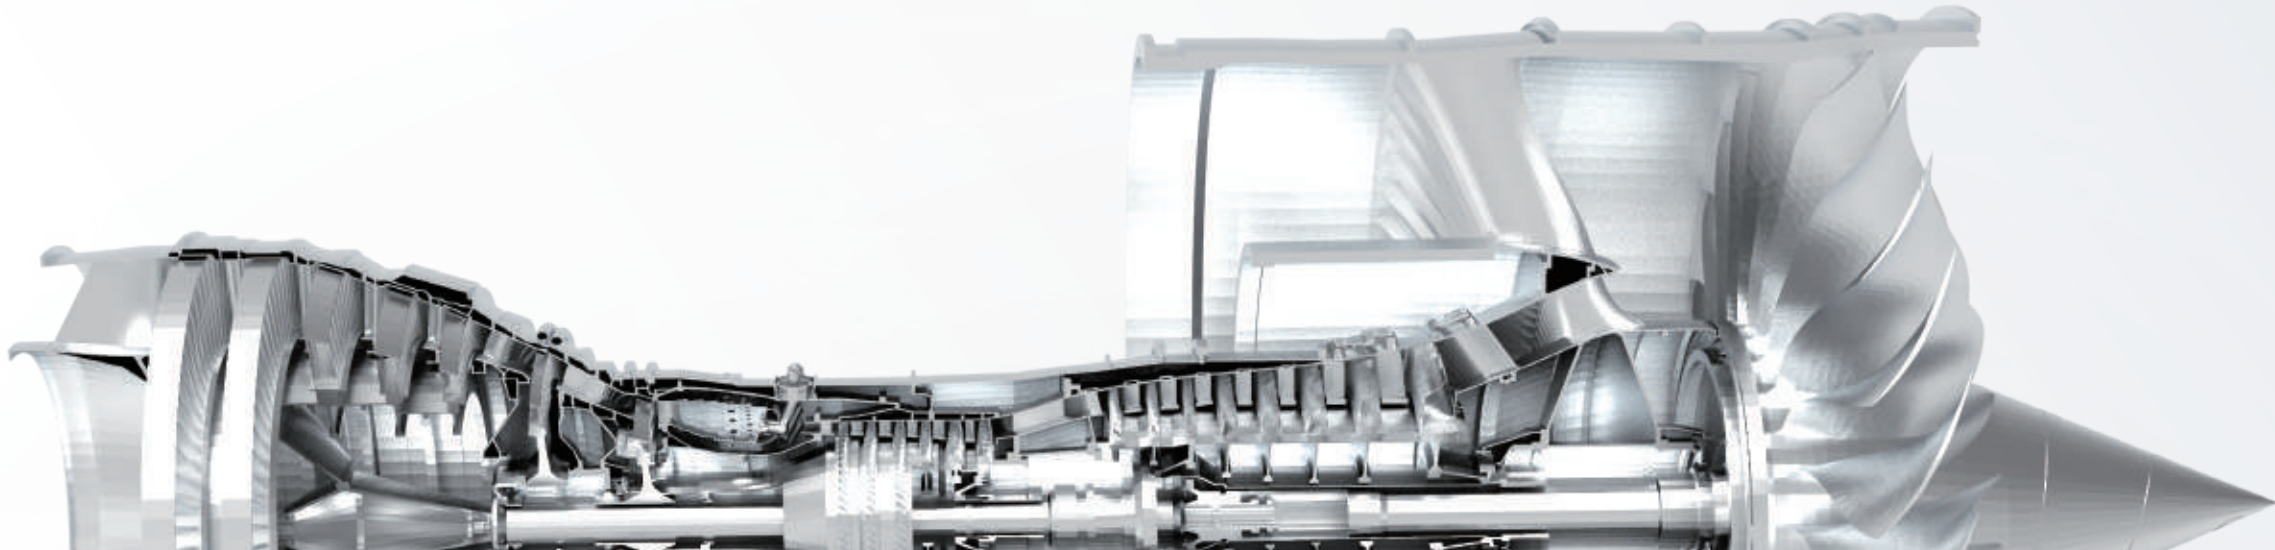

Automotive/New Energy Industry Application

The automotive and new energy industries are witnessing rapid growth, driven by the rapid expansion of new energy vehicles. Chotest provides solutions for various dimension measurements in the entire production process, from battery production stages, modules, battery packs, electric motor components, electronic control modules, to complete vehicle bodies.

Automotive Research Institute



Chotest Universal Thread Measuring Machines can calibrate the full parameters of the thread, helping the precision manufacturing of automobiles.

P143



Chotest universal length measuring machine SJ5100 is used to calibrate the gauges and other measuring tools, which are widely used in major automobile research institutes.

P137



Chotest fully automatic dial indicator testing machines SJ2000 Series can automatically calibrate various plunger dial indicators, digital dial indicators, dial test gauges, dial bore gauges, mechanical comparators, etc.

P145



Chotest Coordinate measuring machine is used in the design and trial production of new models.

P93



Chotest Video Measuring Machines can measure the sizes of various auto parts.

P21



Chotest 2D profilometers SJ5700 series can inspect the tiny dimensions of auto parts, and ensure the high processing accuracy of parts.

P109



Bodywork

Chotest Coordinate measuring machines support high precision and high speed measurement for car body.

P93



Chotest Laser tracker is a flexible and large-range measurement method for the car body, and has been recognized and accepted by the automobile OEM and their supporting factories. As a supplement to the Chotest Coordinate Measuring machine, Chotest Laser Tracker is appearing more and more in the workshops of automobile OEM.

P79

Powertrain



Chotest Coordinate Measuring machine is crucial to ensuring the quality and performance of the powertrain and even the entire vehicle.

P93



Chotest 2D profilometers SJ5700 series can measure the tiny dimensions of automobile engines, gearboxes and other parts.

P109



Chotest Video Measuring Machines / Flash Measuring Machines can quickly and accurately measure the XY sizes of small auto parts.

P21/P37

Automotive parts



Chotest Coordinate Measuring machine is an ideal solution for geometric measurement and quality control of cylinder parts.

P93



Chotest 2D profilometers SJ5700 series can measure the tiny dimensions of automobile cylinder head parts.

P109



Chotest Video Measuring Machines/ Flash Measuring Machines can efficiently measure the diameter and center distance of the connecting rod.

P21/P36



Chotest horizontal Flash Measuring Machine VX5000 series can easily measure the size of shaft parts, making the measurement process simple, efficient and accurate.

P53



Chotest Nano 3D Optical Surface Profilometers can measure the surface profile of the fuel injector at the sub-nanometer level.

P57




Chotest 2D profilometers SJ5700 series can measure both roughness and profile of the workpieces.

P109



Chotest Machine tool probes PO series can control the machining process of auto parts, and realize large-scale on-line measurement of parts after machining, ensure machining accuracy.

P127



Chotest Laser interferometer SJ6000 can calibrate and compensate CNC machine tools for the position accuracy (positioning accuracy repeatability, positioning accuracy, etc.) and geometric accuracy (pitch and yaw angle, straightness, verticality, etc.).

P81

Camera/LIDAR



Chotest Laser interferometer SJ6000 can calibrate and compensate CNC machine tools for the position accuracy (positioning accuracy repeatability, positioning accuracy, etc.) and geometric accuracy (pitch and yaw angle, straightness, squareness, etc.).

P81



Chotest Nano 3D Optical Surface Profilometers can measure the surface flatness & roughness and 3D shape of the radar chip.

P57

Power Battery



Chotest Coordinate Measuring machine achieves precision measurement of length & width, flatness, assembly hole position and step height of battery pack.


P93



Chotest Flash Measuring Machines/ Video Measuring Machines provide a precision and stable measurement solution for top covers of power battery.

P21/P37




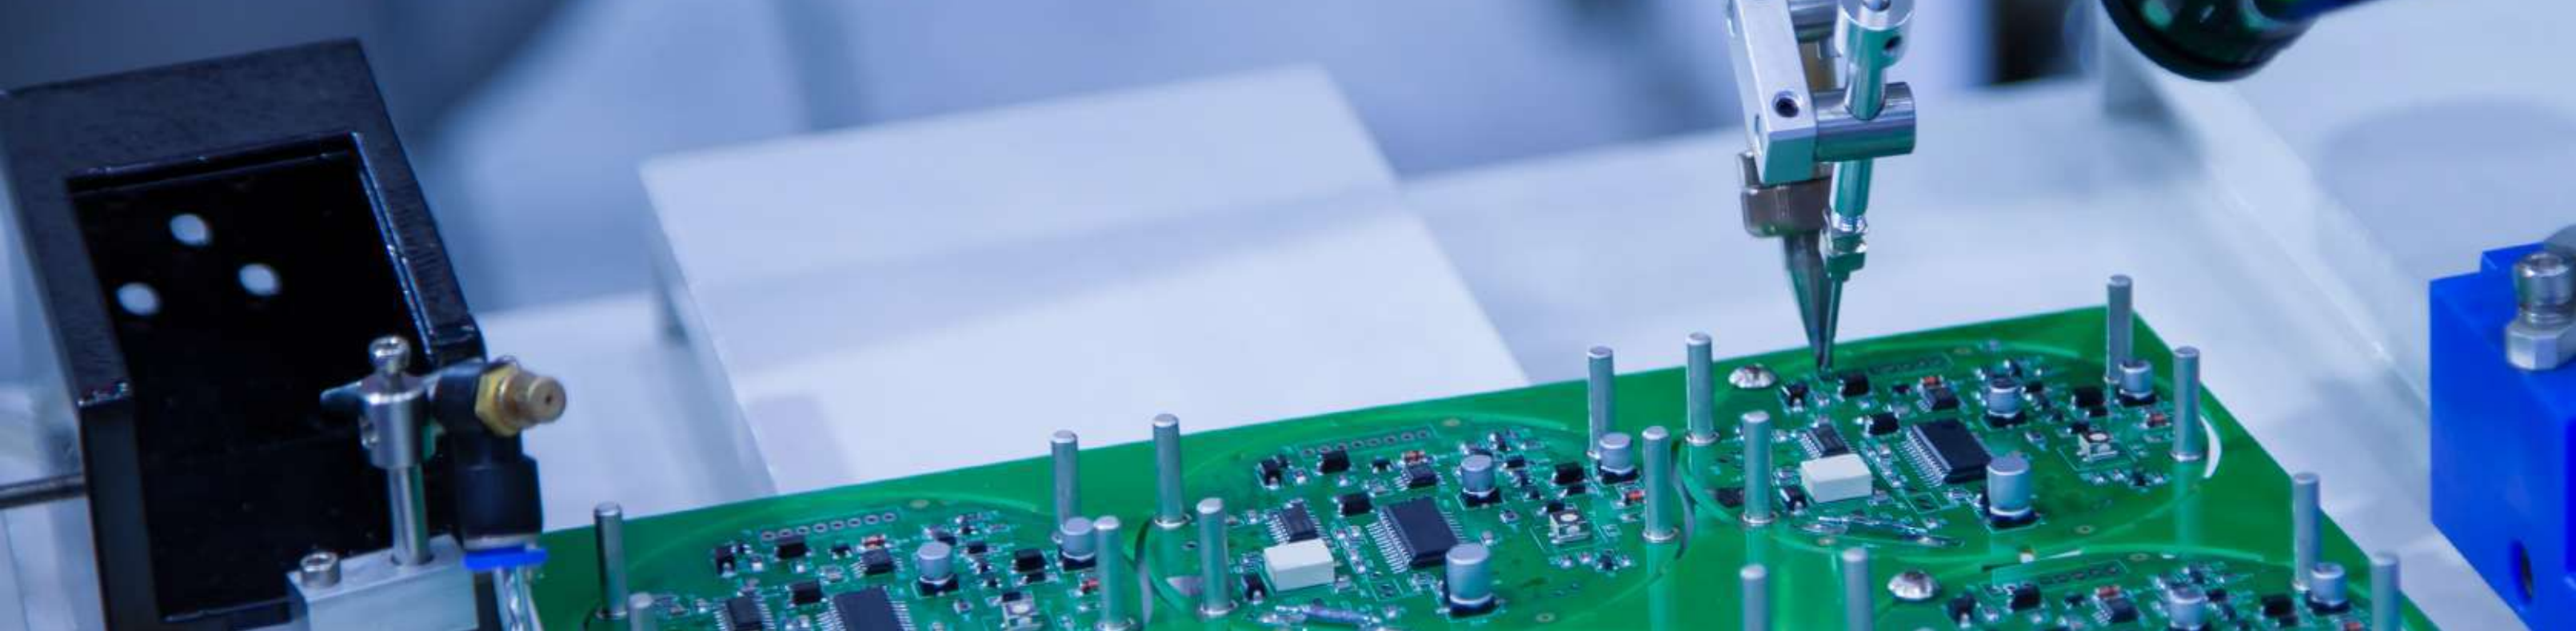

3C Electronics Industry Application

Chotest provides a series of measurement equipment to control the product processing quality in the 3C industry. The software presents datafication results, which can be used to improve design and re-producing.

The adjoint geometric measurement system solves the geometric measurement problems in the whole production process, and realizes the systematic and efficient process control and quality management.

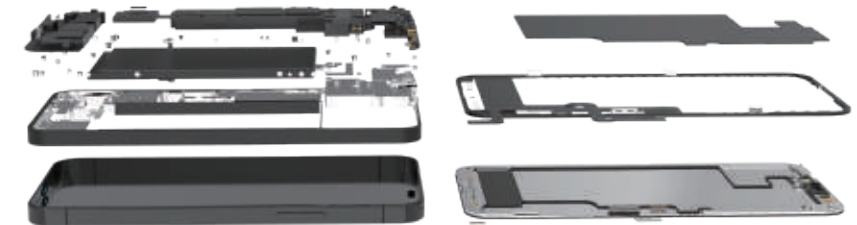

Chotest Flash Measuring Machines/ Video Measuring Machines can realise high-precision measurements of different sizes and varying structures by one click .

P21/P37




Chotest machine tool probes PO series are 100% tested by self -developed inspection equipment to ensure quality and stability. Completely replaceable with international famous probes. Laser interferometer SJ6000 and Rotary axis calibrator WR50 are used to calibrate the guide rail of CNC machine tools. Moreover, Chotest Wireless ballbar MT21 can diagnose CNC machine tools' performance quickly.

P127



Measurement head + automation module + customized 2D and 3D automatic dimensional measurement functions constitute a efficient measurement solution for some special & difficult scenarios.

P131



Chotest Nano 3D Optical Surface Profilometers can measure the roughness, flatness and step height of sapphire screens, phone glass screens, ink screens, etc.

P57





Chotest 2D profilometers SJ5730 series, with micro measuring force and high precision performance, is suitable for fast measurement of easy-to-scratch surfaces, such as the thickness of screen-printing ink on the front cover of mobile phones.

P109



In the 3C field, Chotest coordinate measuring machine is not only used in inspection of the plane sizes and GD &T, but also used in measurement of the curved surfaces, mobile phone screen corners, chamfers. etc.

P93

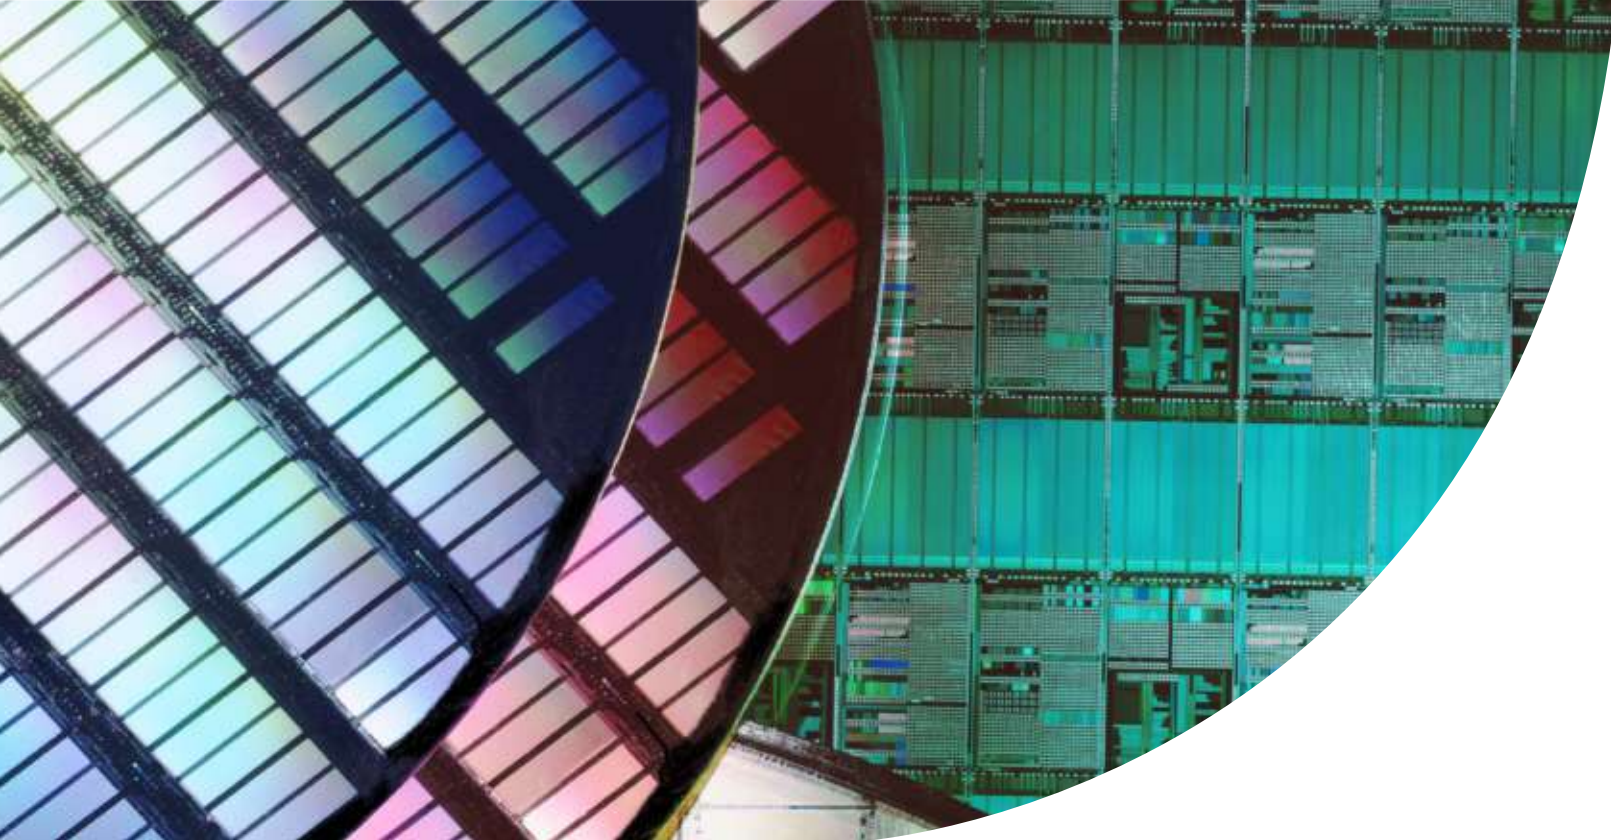

Chotest Nano 3D Optical Surface Profilometer is a non-contact scanning method to achieve 3D re-construction of the sample surface with ultra-high repeatability & accuracy, and obtains relative 2D and 3D measurement data.

P57



Unpatterned Wafer 3D Inspection System WD4000 adopts white light confocal probes and white light interferometry probe to scan and reconstruct 3D surface topography of the wafer, then obtains the relative 2D and 3D parameters of thickness, BOW, WARP, flatness, line roughness, and total thickness variation (TTV).

P131




Patterned Wafer Critical Dimension & Overlay Measurement System can not only inspect the critical dimensions of wafer and the offset of overlay, but also measure the 3D surface form and roughness of wafer at the sub-nanometer level. Automatic robot arm can load and upload the test objects automatically, which helps to achieve fully automated production in the workshop.

P131


Semiconductor Industry Application

In recent years, with higher and higher requirements to product quality in the chip manufacturing industry, more sophisticated measurement instruments are required to ensure product quality. Integrating self-developed software algorithms, Chotest precision measurement equipment perfectly caters for this kind of demands.



Chotest Confocal Microscope VT6000 series can reconstruct surface 3D topography by non-contact scanning, and has better imaging effects on surface with large slopes. It is be widely used in semiconductor manufacturing and packaging process inspection.

P67




Chotest Video Measuring Machines/-Flash Measuring Machines are mainly used in semiconductor packaging process, and they measure the substrates, lead frames, ceramic parts efficiently by one-click.

P21/P37



Chotest Stylus Nano Profiler NS200 can measure the film thickness & step height, surface topography and surface waviness & roughness by contact scanning. Thanks to micro measuring force, NS200 absolutely does not scratch the surface of test object at all.

P125

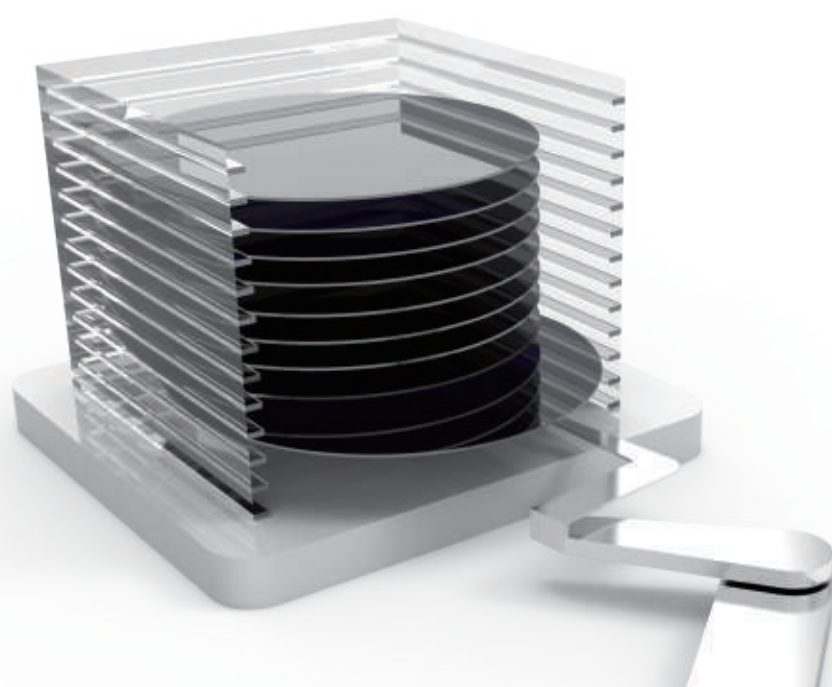




Optical Measuring Instrument

Automatic Video Measuring Machines CHT Series

Precision, Versatile

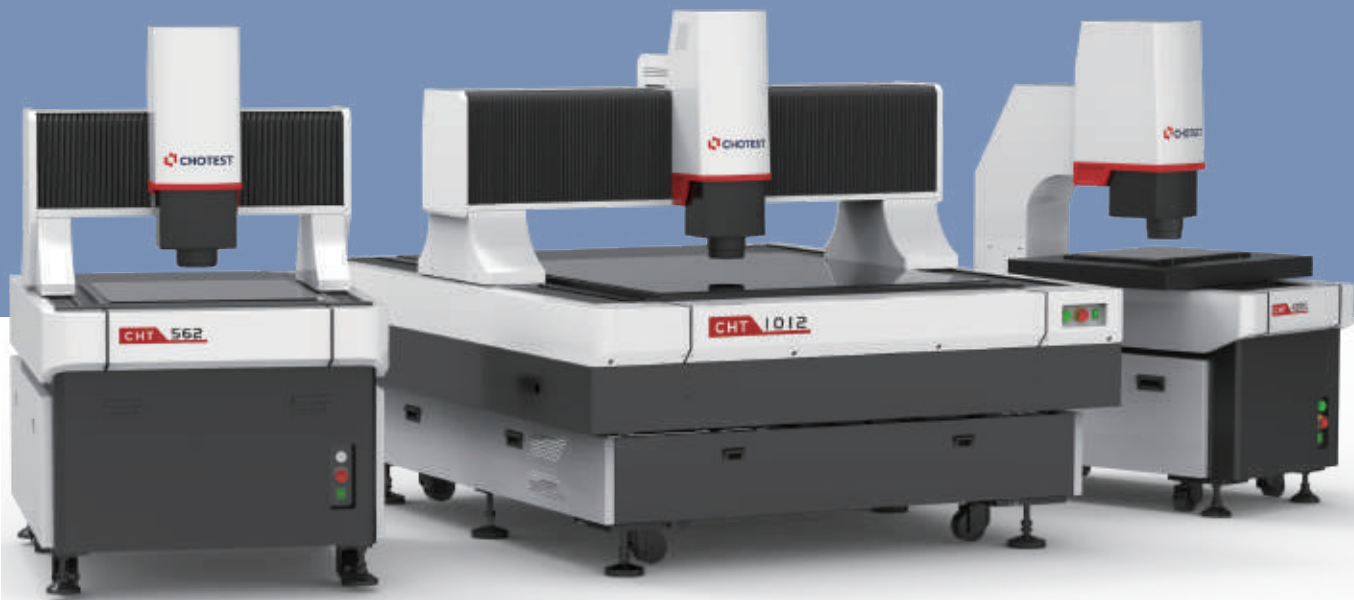


Description

Automatic video measuring machines CHT series covers different measurement ranges and offers powerful functionality. It can perform precise measurements of surface dimensions, contours, angles, positions, and geometric tolerances for various complex parts.

Automatic video measuring machines CHT series can be used in machinery, electronics, mold, injection molding, hardware, rubber, low-voltage electrical appliances, magnetic materials, precision stamping, connection Plug-ins, connectors, terminals, mobile phones, home appliances, printed circuit boards, medical equipment, clocks, knives, measurement and testing, etc.

Software Interface

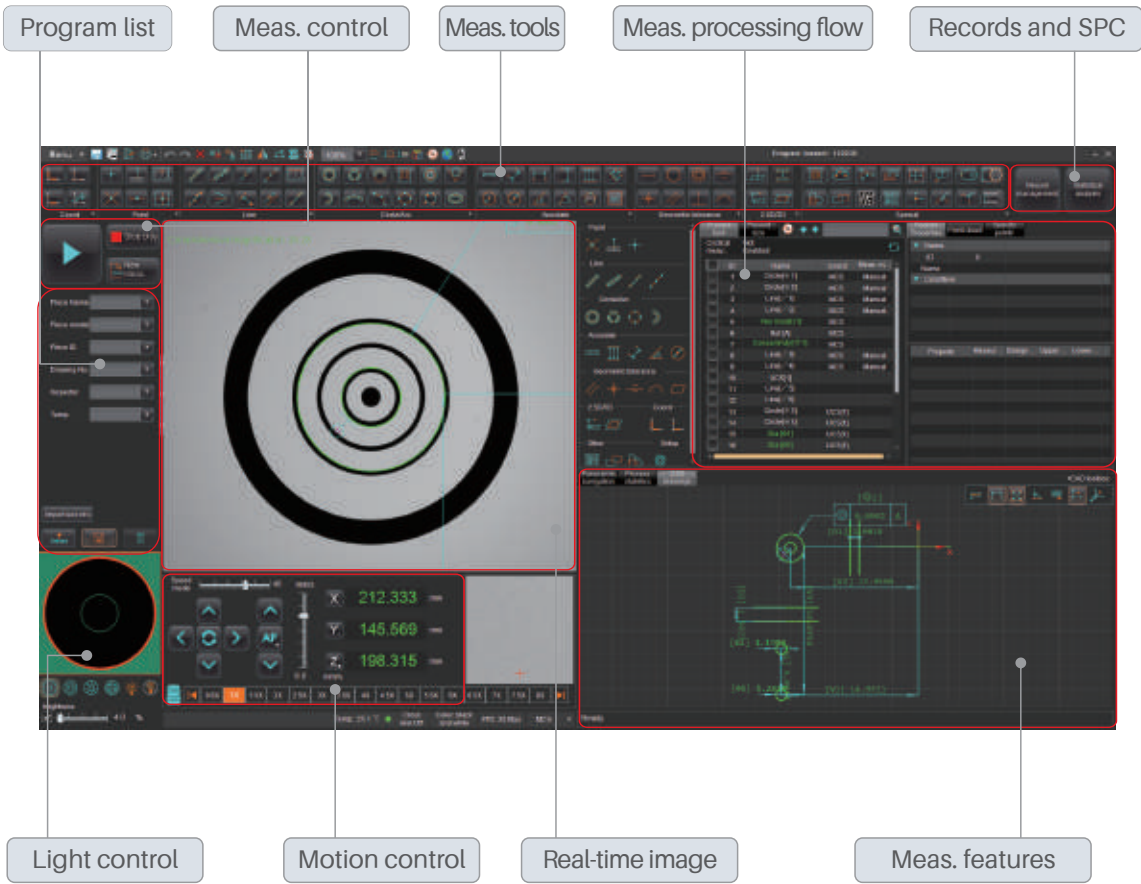

User-Friendly Operation Interface


Auto data export

- Support exporting data to designated excel file according to designated template in real time.
- Can output Excel, Word, PDF, TXT reports and AutoCAD files.
- Support Q-DAS transmission according to designated format.
- Support data exchanging via HTTP or socket protocol.
- Output SPC analysis report, which includes statistical values (such as CA, PPK, CPK, PP, etc.) and control charts (such as mean and range charts, mean and standard deviation charts, median and range charts, single value and moving range chart).



Easy to operate

With user-friendly software,
anyone can be trained to use it quickly

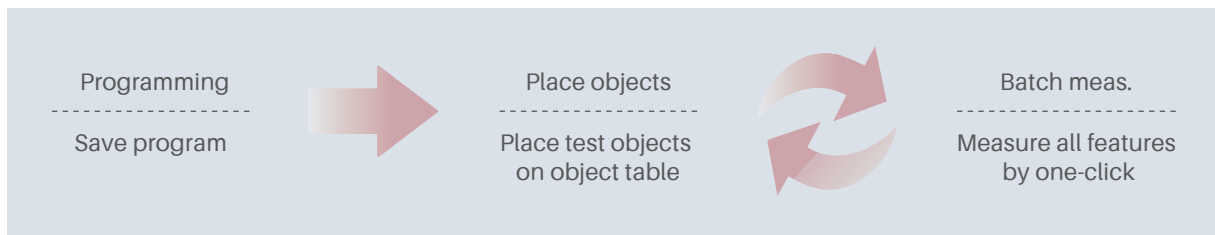

Measurement function

	Extraction Tools	Scanning to extract edge points, multi-segment edge point extraction, circular edge point extraction, ellipse extraction, frame selection to extract contour lines, focus points, closest points, etc.
	Annotation Tools	Point, line, circle (center coordinates, radius, diameter), arc, center, angle, distance, line width, hole position, aperture, number of holes, distance from hole to hole, distance from hole to edge, distance from arc center to hole, the distance from the center of the arc to the side, the distance from the high point of the arc to the high point of the arc, and the distance from the intersection to the intersection, etc.
	Construction	Intersection point, center point, extreme point, end point, line connecting two points, parallel line, perpendicular line, tangent line, bisector, Centerlines, line segment fusion, radius circle, three-line inscribed circle, two-line radius inscribed circle, etc.
	GD&T	Straightness, roundness, position, parallelism, symmetry, perpendicularity, concentricity, profile and position tolerance evaluation.
	Coordinate	Instrument coordinate system, point to line, point to point, line to line and other workpiece coordinate systems; image registration coordinate system; Can translate, rotate, manually adjust the coordinate system.
	Special Tools	R angle, horizontal pitch, circumferential pitch, screen, slot, contour comparison, spring, O-ring and other special tools for rapid measurement.
		Support tolerance batch setting, scale classification, and color custom management.

Flexible shooting and precise calculation

Support segmental programming control of surface light, transmitted light and coaxial light, automatically identify the measurement position, and obtain uniform and stable measurement results every time.




Ring light




Back light




Coaxial light



Surface features are clear




Easy to measure profile features




Measure diameter of blind hole

Auto batch measurement

- The program matches the coordinate system of the workpiece, automatically executes the measurement process, supports the import drawing in dxf, dwg, ger, gbr, bmp, pdf, and coordinates system matching measurement;
- In the CNC fixed coordinate system mode, batch measurement can be performed quickly and accurately.

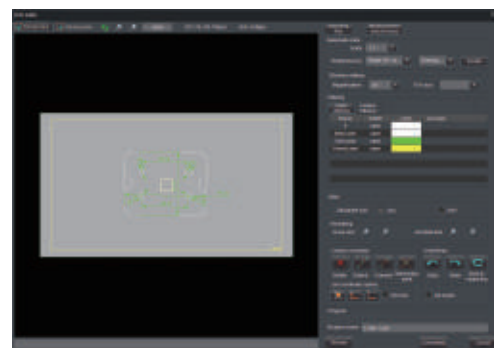


Import CAD drawing to build a program

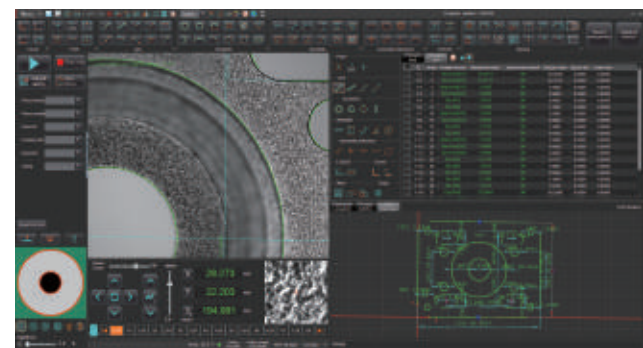

CNC batch measurement


Intelligent AI edge-finding technology

The AI measurement software has powerful algorithms and strong training capabilities. It can measure and store images at the same time, continuously optimize and iterate the model A, and can cope with scenarios where traditional measurement methods cannot automatically measure, such as warped and incomplete boundaries, blurred contours, many interferences on boundaries, and blurred boundaries. Compared to traditional manual measurement, it significantly enhances efficiency and repeatability.

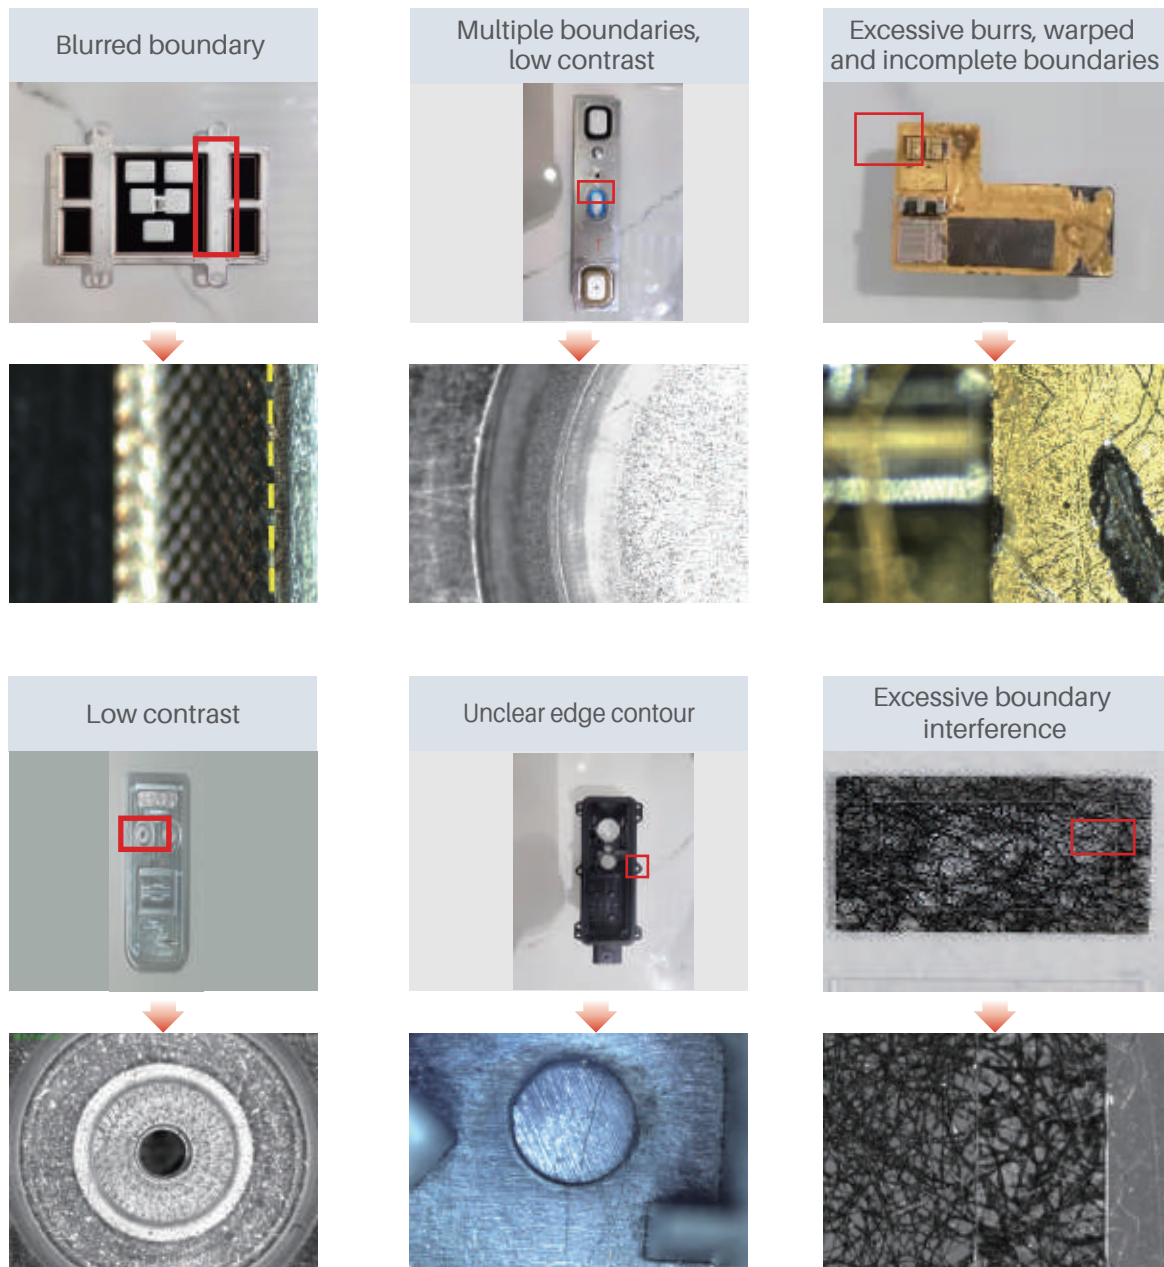


3D offline programming

- Without an actual VMM, the programming of measurement programs can be completed on 3D images, effectively improving the practical efficiency of using VMM.
- The interface is intuitive, easy to learn and operate.

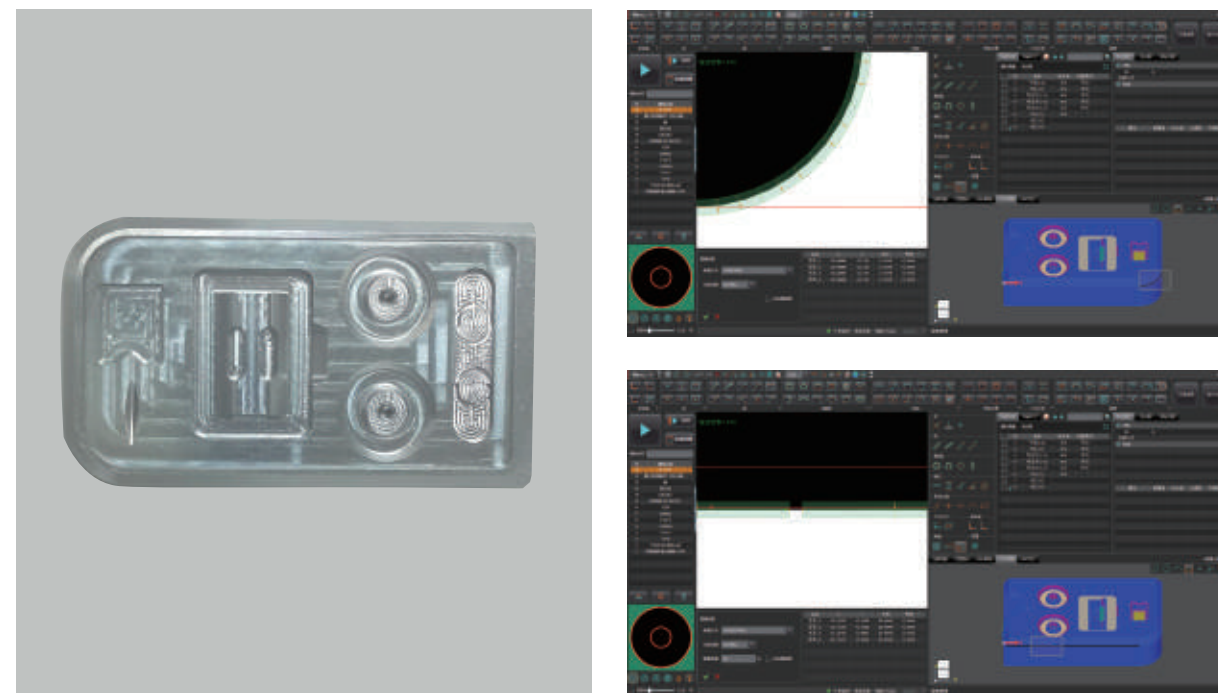


Profile tolerance

Multiple profile-extracting tools can be used to extract profile with complex edges, as well as import a set of profile points at specified locations for extraction. Can evaluate profile by non reference, single reference, and double references. Errors are displayed with color bands, which are intuitive and clear.

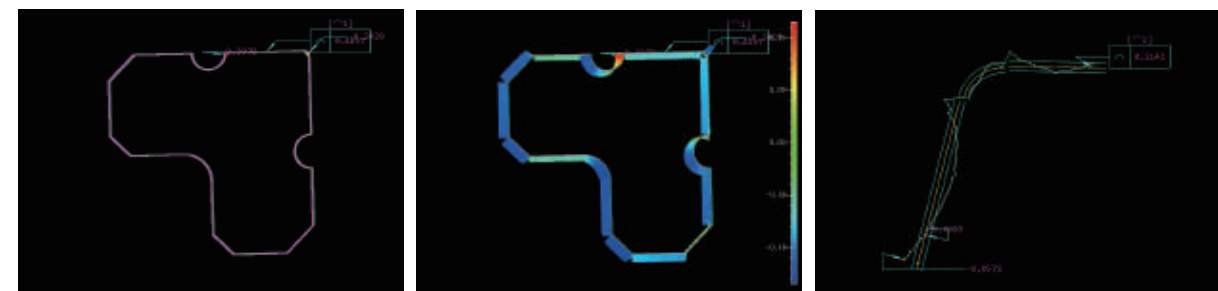

Various accessories


- Equips a touch probe or optical probe to measure height and flatness and realize 2.5D space measurement.
- Supports external input from digital calipers and height gauges.
- Supports label printers.

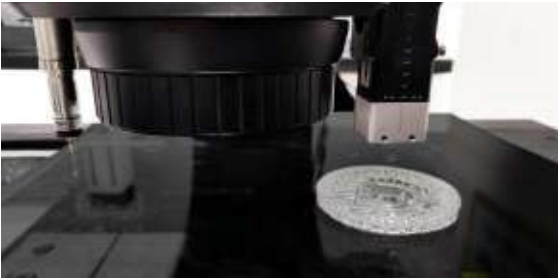


Height measurement



Flatness measurement

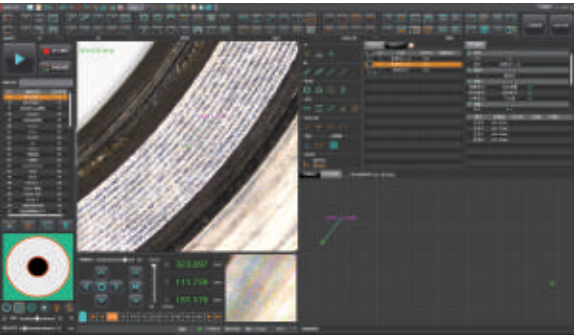

Height result

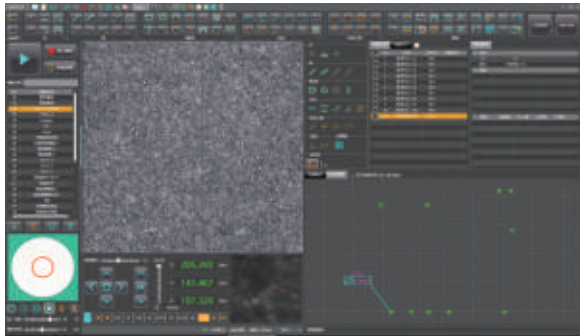

Flatness result

Application



Phone accessories




Machining parts



Plastic injection parts



Rigid PCB




Mask board




Car monitor frame



Small metal parts



Die cutting



Connectors

Parameters

Model No.			CHT322A	CHT432A
Travel Range	X		300 mm	400 mm
	Y		200 mm	300 mm
	Z		200 mm	200 mm
Structure Type			Column	
Base Material			Granite	
Monitor			24" LCD(1920×1080)	
Image Sensor			1.6MP High definition colorful industrial camera	
Resolution of Glass Scale			0.5μm	
Lens			6.5X manual lens(Motorized lens is optional)	
Magnification			Optical Zoom: 0.7X~4.5X, Image Zoom: 32~206X	
Light	Back Light		Telecentric transmission illumination	
	Ring Light		5 rings and 8 segments (256 levels) surface light	
	Coaxial Light		LED(Optional)	
Accuracy*1	X/Y		(2.5+L/200)μm	
	X⊥Y		(3.0+L/200)μm	
	Z*2		(5.0+L/200)μm	
Height Meas. (Optical Probe) (Optional)	Measuring Range(X*Y)		200*200mm	300*300mm
	Max Depth/Diameter(H/Φ)		1.64	
	Dia. of Beam		Φ100μm(Φ18μm optional)	
	Resolution		0.25μm	
	Z Non-movement	Range(Z)	±2mm	
		Accuracy	±2μm	
	Z Movement	Range(Z)	200mm	
		Accuracy	(5.0+L/200)μm, L is Z movement height in mm	
Max Speed	XY		500 mm/s	
	Z		200 mm/s	
Size			760x1150x1650mm	860x1300x1650mm
Weight			560 kg	650 kg
Loading Capacity			25 kg	
Power			1500W	2000W
Sensor Option			(1)Touch probe; (2)Optical probe	
Motion Control			Servo control system	
Software			VisionX	
Input			AC200~240V, 50/60Hz	
Working Environment			Temp. 20℃ ±2℃, Humidity 20~80%, Vibration<0.002g, Less than15Hz	

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table in mm.
*2 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.

Parameters

Model No.		CHT322U	CHT432U
Travel Range	X	300 mm	400 mm
	Y	200 mm	300 mm
	Z	200 mm	200 mm
Structure Type		Column	
Base Material		Granite	
Monitor		24" LCD(1920×1080)	
Image Sensor		1.6MP High definition colorful industrial camera	
Resolution of Glass Scale		0.1μm	
Lens		8.3X motorized lens	
Magnification		Optical Zoom: 0.6~5.0X, Image Zoom: 27~229X	
Light	Back Light	Telecentric transmission illumination	
	Ring Light	6 rings and 8 segments (256 levels) surface light	
	Coaxial Light	LED	
Accuracy ^{*1}	X/Y	(2.0+L/200)μm	
	X⊥Y	(3.0+L/200)μm	
	Z ^{*2}	(4.5+L/200)μm	
Height Meas. (Optical Probe) (Optional)	Measuring Range(X*Y)		200*200mm 300*300mm
	Max Depth/Diameter(H/Φ)		1.64
	Dia. of Beam		Φ100μm(Φ18μm optional)
	Resolution		0.25μm
	Z Non-movement	Range(Z)	±2mm
		Accuracy	±2μm
	Z Movement	Range(Z)	200mm
		Accuracy	(4.5+L/200)μm, L is Z movement height in mm
Max Speed	XY		500 mm/s
	Z		200 mm/s
Size		760×1150×1650 mm	860×1300×1650 mm
Weight		560 kg	700 kg
Loading Capacity		25kg	
Power		1500W	2000W
Sensor Option		(1)Touch probe; (2)Optical probe	
Motion Control		Servo control system	
Software		VisionX	
Input		AC200~240V, 50/60Hz	
Working Environment		Temp. 20℃ ±2℃, Humidity 20~80%, Vibration<0.002g, Less than15Hz	

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table in mm.
*2 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.

Parameters

Model No.			CHT433S	CHT432S
Travel Range	X		400 mm	400 mm
	Y		300 mm	300 mm
	Z		300 mm	200 mm
Structure Type			Column	
Base Material			Granite	
Monitor			24" LCD(1920×1080)	
Image Sensor			5MP High definition colorful industrial camera	
Resolution of Glass Scale			0.1μm	
Lens			13.3X motorized lens	
Magnification ^{*1}			Optical Zoom: 0.6~8.0X, Image Zoom: 17~380X	
Light	Back Light		Telecentric transmission illumination	
	Ring Light		6 rings and 8 segments (256 levels) surface light(or RGB surface light, Optional)	
	Coaxial Light		LED	
Accuracy ^{*1}	X/Y		(1.8+L/250)μm	
	X⊥Y		(2.2+L/250)μm	
	Z ^{*2}		(3.0+L/200)μm	
Fly-Shooting Mode			Support	
Navigation Camera			Support	
Sensor Option			(1)Touch probe; (2)Optical probe	
Max Speed	XY		500 mm/s	
	Z		200 mm/s	
Height Meas. (Optical Probe) (Optional)	Measuring Range(X*Y)		300*300mm	300*300mm
	Max Depth/Diameter(H/Φ)		1.64	
	Dia. of Beam		Φ100μm(Φ18μm optional)	
	Resolution		0.25μm	
	Z Non-movement	Range(Z)	±2mm	
		Accuracy	±2μm	
	Z Movement	Range(Z)	300mm	200mm
		Accuracy	(3.0+L/200)μm, L is Z movement height in mm	
Size			860×1380×1800 mm	860×1380×1670 mm
Weight			750 kg	680 kg
Loading Capacity			25kg	
Power			2000W	
Motion Control			Servo control system	
Software			VisionX	
Input			AC200~240V, 50/60Hz	
Working Environment			Temp. 20℃ ±2℃, Humidity 20~80%, Vibration<0.002g, Less than15Hz	

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table (mm)
*2 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.

Parameters

Model No.		CHT452	CHT562	CHT682
Travel Range	X	400 mm	500 mm	600 mm
	Y	500 mm	600 mm	800 mm
	Z	200 mm	200 mm	200 mm
Structure Type		Moving Bridge		
Base Material		Granite		
Monitor		24" LCD(1920×1080)		
Image Sensor		1.6MP High definition colorful industrial camera		
Resolution of Glass Scale		0.1μm		
Lens		8.3X motorized lens		
Magnification		Optical Zoom: 0.6~5.0X, Image Zoom: 27~229X		
Light	Back Light	Telecentric transmission illumination		
	Ring Light	6 rings and 8 segments (256 levels) surface light		
	Coaxial Light	LED		
Accuracy*1	X/Y	(2.5+L/200)μm		
	X⊥Y	(3.0+L/200)μm		
	Z*2	(4.5+L/200)μm		
Max Speed	XY	500 mm/s		
	Z	200 mm/s		
	Measuring Range(X*Y)	300*500mm	400*600mm	500*800mm
Height Meas. (Optical Probe) (Optional)	Max Depth/Diameter(H/Φ)		1.64	
	Dia. of Beam		Φ100μm(Φ18μm optional)	
	Resolution		0.25μm	
	Z Non-movement	Range(Z)	±2mm	
		Accuracy	±2μm	
	Z Movement	Range(Z)	200mm	
		Accuracy	(4.5+L/200)μm, L is Z movement height in mm	
	Size(mm)		1030×1400×1700	1130×1500×1700
	Weight		1100 kg	1370 kg
Loading Capacity		25kg		
Power		2000W	2500W	2500W
Sensor Option		(1)Touch probe; (2)Optical probe		
Motion Control		Servo control system		
Software		VisionX		
Input		AC200~240V, 50/60Hz		
Working Environment		Temp. 20°C ±2°C Humidity 20~80%, Vibration<0.002g, Less than15Hz		

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table in mm.
*2 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.

Parameters

Model No.			CHT0810	CHT1012	CHT1216
Travel Range	X		800 mm	1000 mm	1200mm
	Y		1000 mm	1200 mm	1600mm
	Z		200 mm	200 mm	200 mm
Structure Type			Moving Bridge		
Base Material			Granite		
Monitor			24" LCD(1920×1080)		
Image Sensor			1.6MP High definition colorful industrial camera		
Resolution of Glass Scale			0.1μm		
Lens			8.3X motorized lens(13.3X Optional)		
Magnification			Optical Zoom: 0.6~5.0X, Image Zoom: 27~229X		
Light	Back Light		Telecentric transmission illumination		
	Ring Light		6 rings and 8 segments (255 levels) surface light		
	Coaxial Light		LED		
Accuracy*1	X/Y		(3.0+L/200)μm	(3.5+L/200)μm	
	X⊥Y		(4.0+L/200)μm	(4.5+L/200)μm	
	Z*2		(4.5+L/200)μm	(4.5+L/200)μm	
Max Speed	XY		500mm/s		
	Z		200 mm/s		
	Measuring Range(X*Y)		700*1000mm	900*1200mm	1100*1500mm
Height Meas. (Optical Probe) (Optional)	Max Depth/Diameter(H/Φ)		1.64		
	Dia. of Beam		Φ100μm(Φ18μm optional)		
	Resolution		0.25μm		
	Z Non-movement	Range(Z)	±2mm		
		Accuracy	±2μm		
	Z Movement	Range(Z)	200mm		
		Accuracy	(4.5+L/200))μm, L is Z movement height in mm		
	Size			1600×2020×1700mm	1830×2300×1700mm
Weight			2400 kg	3750 kg	4200kg
Loading Capacity			50kg		
Power			2500W		
Sensor Option			(1)Touch probe; (2)Optical probe		
Motion Control			Servo control system		
Software			VisionX		
Input			AC200-240V, 50/60Hz		
Working Environment			Temp. 20°C ±2°C, Humidity 20~80%, Vibration<0.002g, Less than15Hz		

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table in mm.
*2 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.


Automatic Video Measuring Machines Novator Series



Features



Replaceable RGB surface light

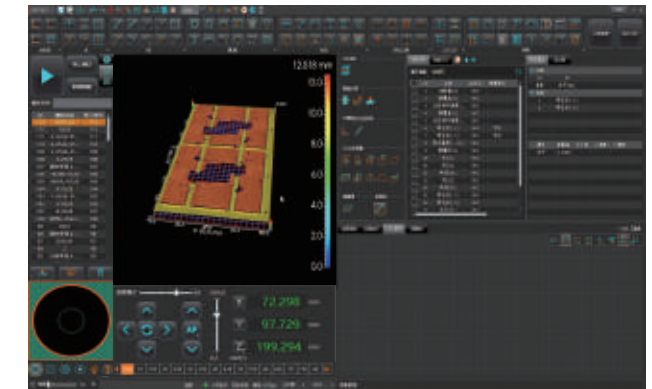

Integrate 3D topography measurement

■ Stable moving stage, high measurement accuracy

1. Precision marble body, good stability and high precision.
2. Precision linear slide rail and servo control system, smooth and silent movement.
3. Three axes x/y/z programmable, realize batch inspection for complex features.

■ Laser scanning imaging, 3D composite measurement

1. Support spot-type laser probe to scan profile in height direction.
2. Support 3D line-scanning laser probe.
3. VisionX supports a variety of contour measurements and 3D spatial measurements, seamlessly connecting 2D/3D hybrid measurements.

■ Strobe lighting source, high speed fly-shooting

1. Equipped with strobe lighting source, support strobe and normal lighting modes.
2. Support fly-shooting measurement mode, measurement efficiency is increased by 5~10 times.
3. Support the stitching measurement function of the flash measuring machines.

■ Replaceable RGB surface light, independent lifting up and down

1. RGB and white light can be replaced to adapt to a variety of complex colors and material surfaces.
2. The surface light can be lifted independently to better observe the sample surface.
3. Support programmable back light, coaxial light and 6 rings and 8 segments of the surface light.

■ Automatic and fast batch measurement

1. The program matches the workpiece coordinate system and automatically executes the measurement process.
2. Support importing drawing in dxf, dwg, ger, gbr, bmp, pdf.
3. Can execute quickly and accurate batch measurement in CNC fixed coordinate system mode.

■ Easy operation, hassle-free

1. Equipped with a large FOV navigation camera for fast workpiece positioning.
2. Mechanical lens anti-collision function
3. User-friendly operation interface, anyone can easily set and measure.

Functions

1. Measurement tools: Extracting edge points by scanning, extracting edge points by multi-segment, extracting edge points by circle, ellipse extraction, extracting contour line by frame selection, focus point, nearest points, etc.
2. Measure geometric features: Point, line, circle (center coordinate, radius, diameter), arc, center, angle, distance, line width, hole site, aperture, number of holes, distance from hole to hole, hole to edge, distance from the arc center to the hole, distance from the arc center to the edge, distance from the arc high point to the other arc high point, distance from the intersection to the intersection, etc.
3. Construction features: Intersection, center point, extreme point, endpoint, two-point connection, parallel line, perpendicular line, tangent, bisector, center line, line segment fusion, drawing circle by radius, drawing inscribed circle among three lines, drawing inscribed circle by two lines & radius, etc.
4. Geometric tolerance: Straightness, roundness, contour, position, parallelism, symmetry, perpendicularity, concentricity, profile and position tolerance evaluation.

Parameters

Model No.		Novator332	Novator333	Novator342
Travel Range	X	300 mm	300 mm	300 mm
	Y	300 mm	300 mm	400 mm
	Z	200 mm	300 mm	200 mm
Structure Type		Fixed Bridge		
Base Material		Granite		
Monitor		24" LCD(1920×1080)		
Image Sensor		5MP High definition colorful industrial camera		
Resolution of Glass Scale		0.1μm		
Lens		13.3X motorized lens		
Magnification		Optical Zoom: 0.6X~8.0X, Image Zoom: 17X~380X		
F.O.V.		Max: 13x11mm; Min:1.0x0.8mm		
Light	Back Light	Telecentric transmission illumination		
	Ring Light	6 rings and 8 segments (256 levels) surface light(or RGB surface light, Optional)		
	Coaxial Light	LED		
Accuracy*1	X/Y	(1.4+L/250)μm		
	X⊥Y	(1.8+L/250)μm		
	Z	(3.0+L/200)μm		
3D Scanning*2 (Optional)	Z Measuring Range*3	18mm		
	Scanning Width*4	30mm		
	Repeatability*5	±1μm		
	Z Accuracy*5	±0.1%F.S.		
	Scanning Speed	10~80mm/s		
Fly-Shooting Mode		Support		
Navigation Camera		Support		
Sensor Options		(1)Touch probe; (2)Optical probe		
Max Speed	XY	500 mm/s		
	Z	200 mm/s		
Size		860×1140×1685mm	860×1350×1885mm	860×1340×1685mm
Weight		850kg	880kg	900kg
Loading Capacity		25kg		
Power		2000W		
Motion Control		Servo control system		
Software		VisionX		
Input		AC200~240V, 50/60Hz		
Working Environment		Temp. 20℃ ±2℃, Humidity 20~80%, Vibration<0.002g, Less than15Hz		

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table (mm)
*2 Optional line-scanning probe is required.
*3 Measuring range 5mm~40mm optional.
*4 Scanning width 30mm~145mm optional.
*5 Environment temperature is +20 °C ± 1.0 °C


Parameters

Model No.		Novator452	Novator562	Novator563	Novator682
Travel Range	X	400 mm	500 mm	500 mm	600 mm
	Y	500 mm	600 mm	600 mm	800 mm
	Z	200 mm	200 mm	300mm	200mm
Structure Type		Fixed Bridge			
Base Material		Granite			
Monitor		24" LCD(1920×1080)			
Image Sensor		5MP High definition colorful industrial camera			
Resolution of Glass Scale		0.1μm			
Lens		13.3X motorized lens			
Magnification		Optical Zoom: 0.6X~8.0X, Image Zoom: 17X~380X			
F.O.V.		Max: 13x11mm; Min:1.0x0.8mm			
Light	Back Light	Telecentric transmission illumination			
	Ring Light	6 rings and 8 segments (256 levels) surface light(or RGB surface light, Optional)			
	Coaxial Light	LED			
Accuracy*1	X/Y	(1.6+L/250)μm	(1.8+L/250)μm	(2.0+L/250)μm	(2.0+L/250)μm
	X⊥Y	(2.0+L/250)μm	(2.2+L/250)μm	(2.4+L/200)μm	(2.5+L/200)μm
	Z	(3.0+L/200)μm	(3.0+L/200)μm	(3.0+L/200)μm	(3.0+L/200)μm
3D Scanning*2 (Optional)	Z Measuring Range*3	18mm			
	Scanning Width*4	30mm			
	Repeatability*5	±1μm			
	Z Accuracy*5	±0.1%F.S.			
	Scanning Speed	10~80mm/s			
Fly-Shooting Mode		Support			
Navigation Camera		Support			
Sensor Options		(1)Touch probe; (2)Optical probe			
Max Speed	XY	500 mm/s			
	Z	200 mm/s			
Size		960×1545×1685mm	1120×1850×1685mm	1120×1850×1885mm	1200×2160×1685mm
Weight		1100kg	1680kg	1710kg	2120kg
Loading Capacity		25kg	25kg	50kg	50kg
Power		2000W	2500W	2500W	2500W
Motion Control		Servo control system			
Software		VisionX			
Input		AC200~240V, 50/60Hz			
Working Environment		Temp. 20℃ ±2℃, Humidity 20~80%, Vibration<0.002g, Less than15Hz			

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less;
L is the moving range of the table (mm)
*2 Optional line-scanning probe is required.
*3 Measuring range 5mm~40mm optional.
*4 Scanning width 30mm~145mm optional.
*5 Environment temperature is +20 °C ± 1.0 °C

Flash Measuring Machines VX Series

One Touch Measurement
Efficient Accurate

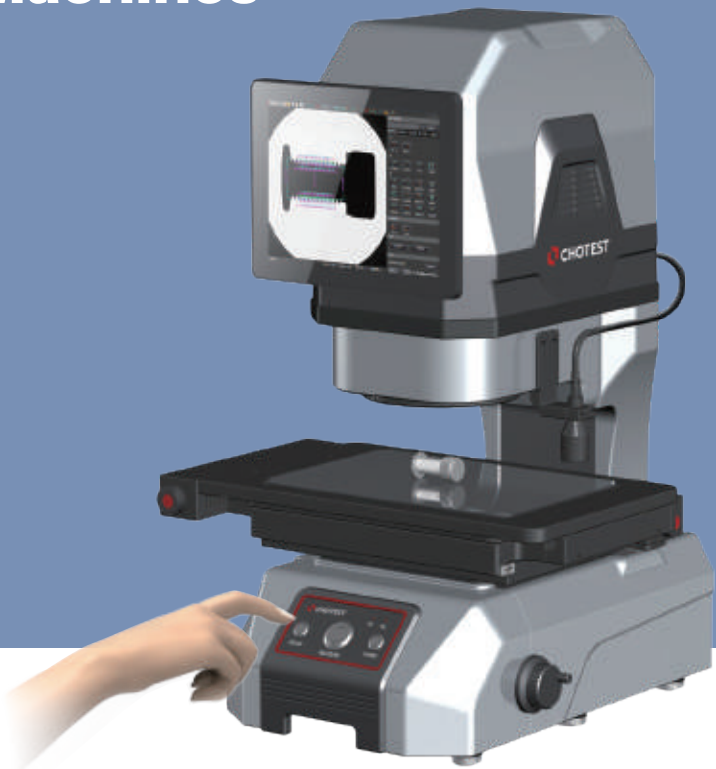

VX8000 series



VX1000 series



VX5000 series




VX3500 / VX8500




VX4000 series

Efficient measurement

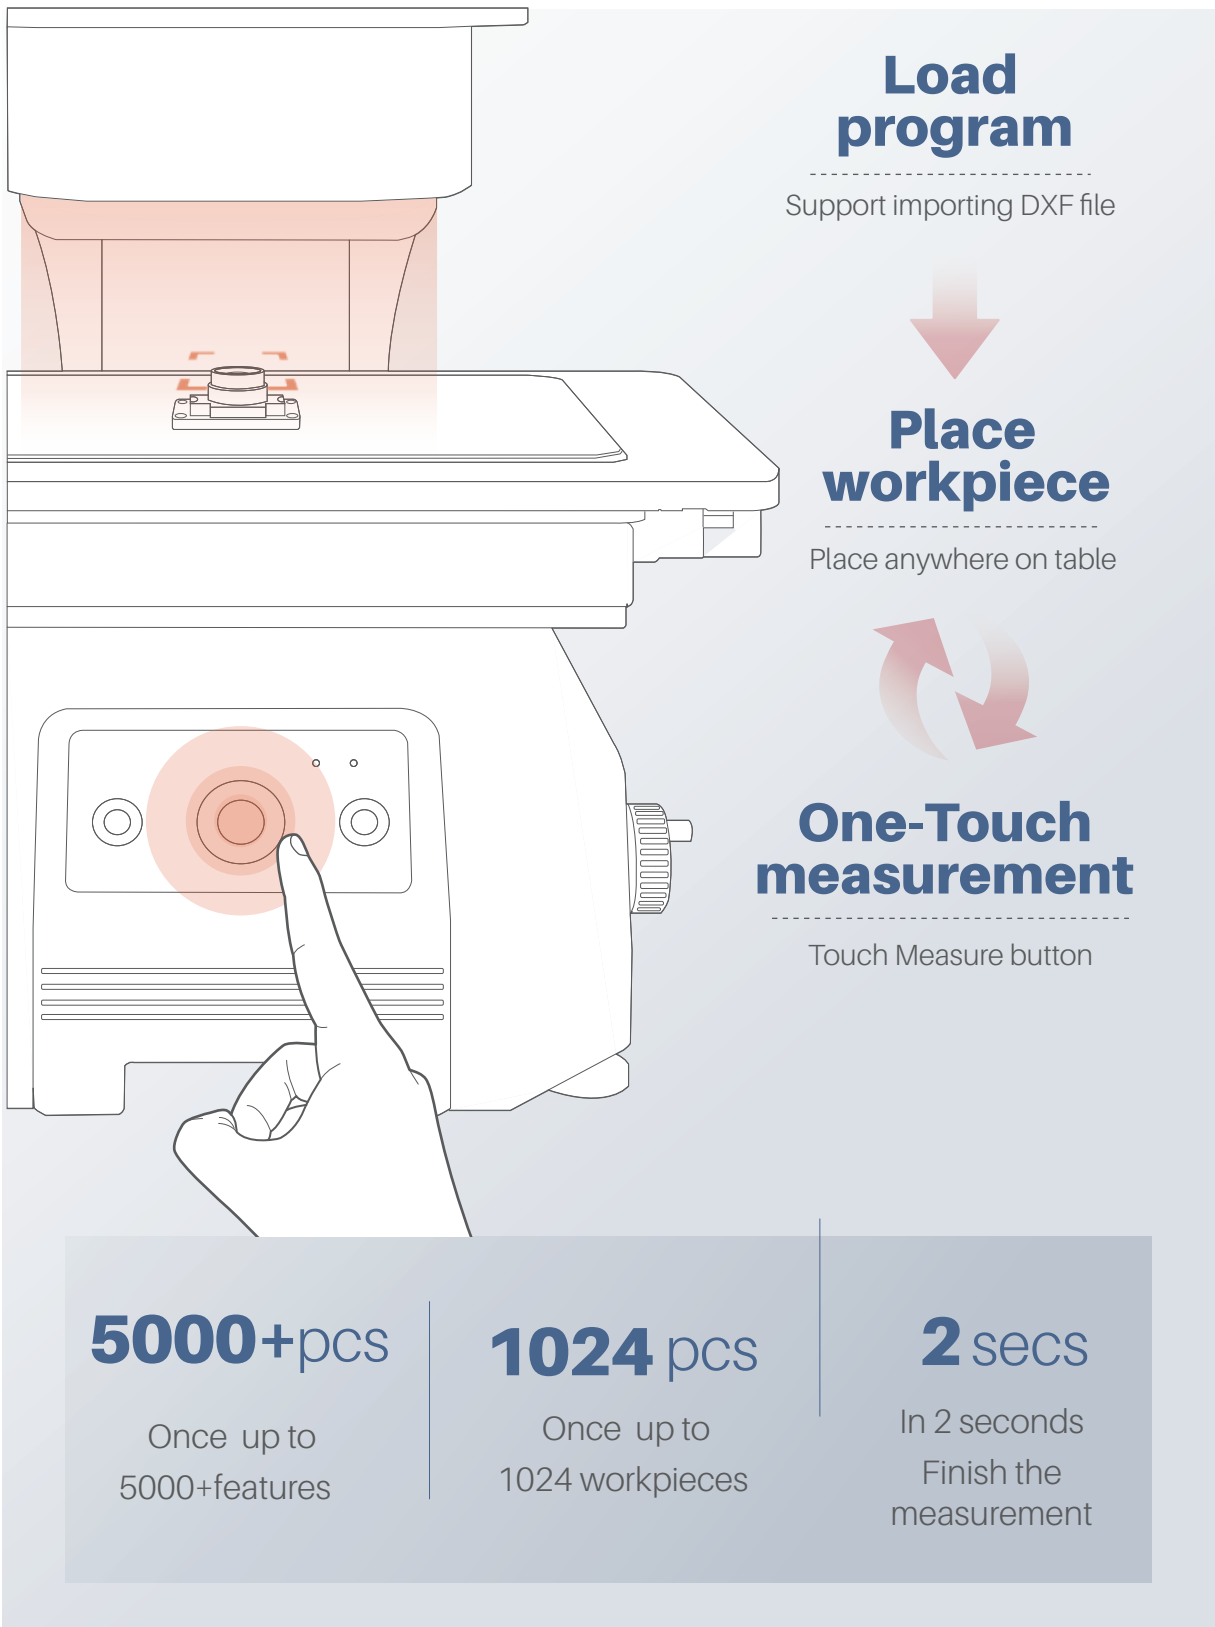

Dedicated Optical Lens

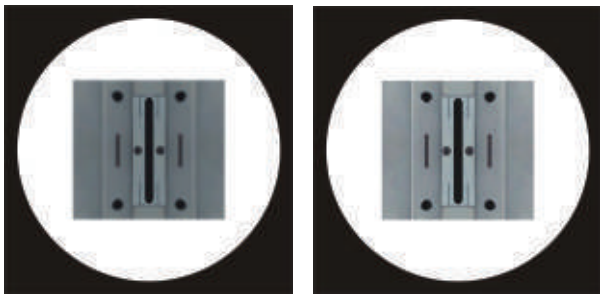


Normal Lens

Our Dedicated lens

Clear image even if there are stages

Equipped with a high depth optical lens and automatic focusing, the flash measuring machine only needs to focus at the tested object once. Even if there are variations in height, the images remain clear.

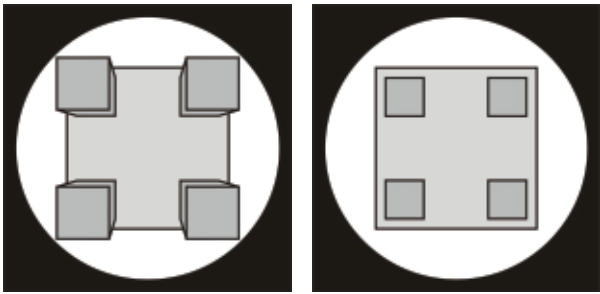


Normal Lens

Our Dedicated lens

Always real size even if there are stages

With a double telecentric optical lens, the size of objects in the image is always real and accurate, even features that are located at edge of the field of view.

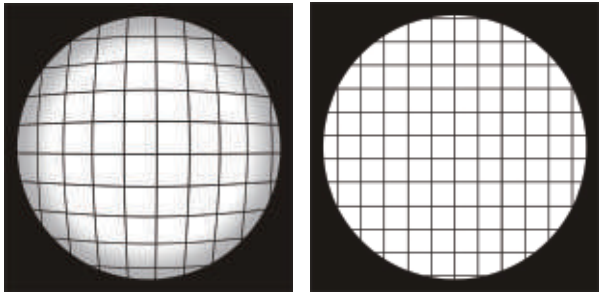


Normal Lens

Our Dedicated lens

Zero distortion in the full field of view

Thanks to the double telecentric optical lens with high depth of field and high resolution, it is almost zero distortion of the image in the full field of view. Test result is always the same in any position of the object table.

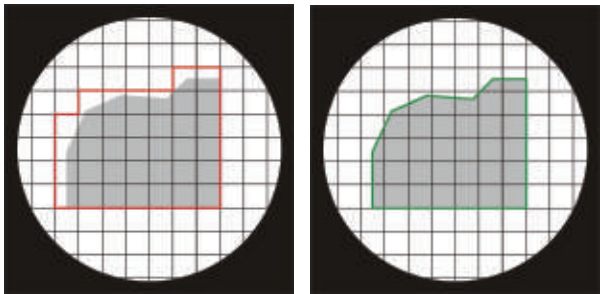

Normal Lens


Our Dedicated lens

Sub-pixel processing of edges


With algorithms of high-order interpolation and numerical fitting, the software can perform sub-pixel processing of the edges.

Light Source

Back light

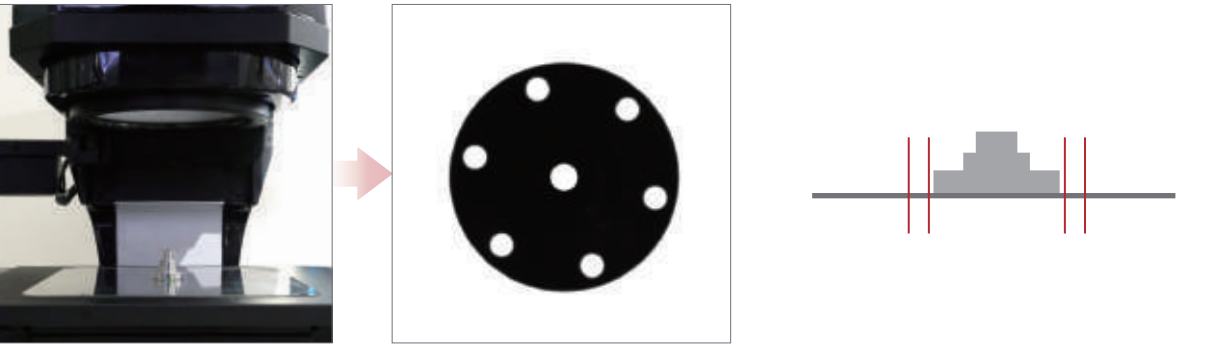


Coaxial light

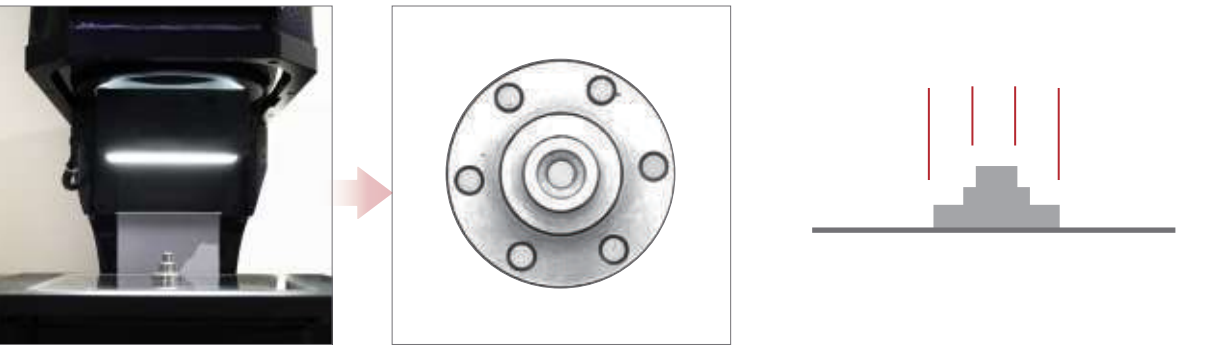

75°Ring light





Height probe

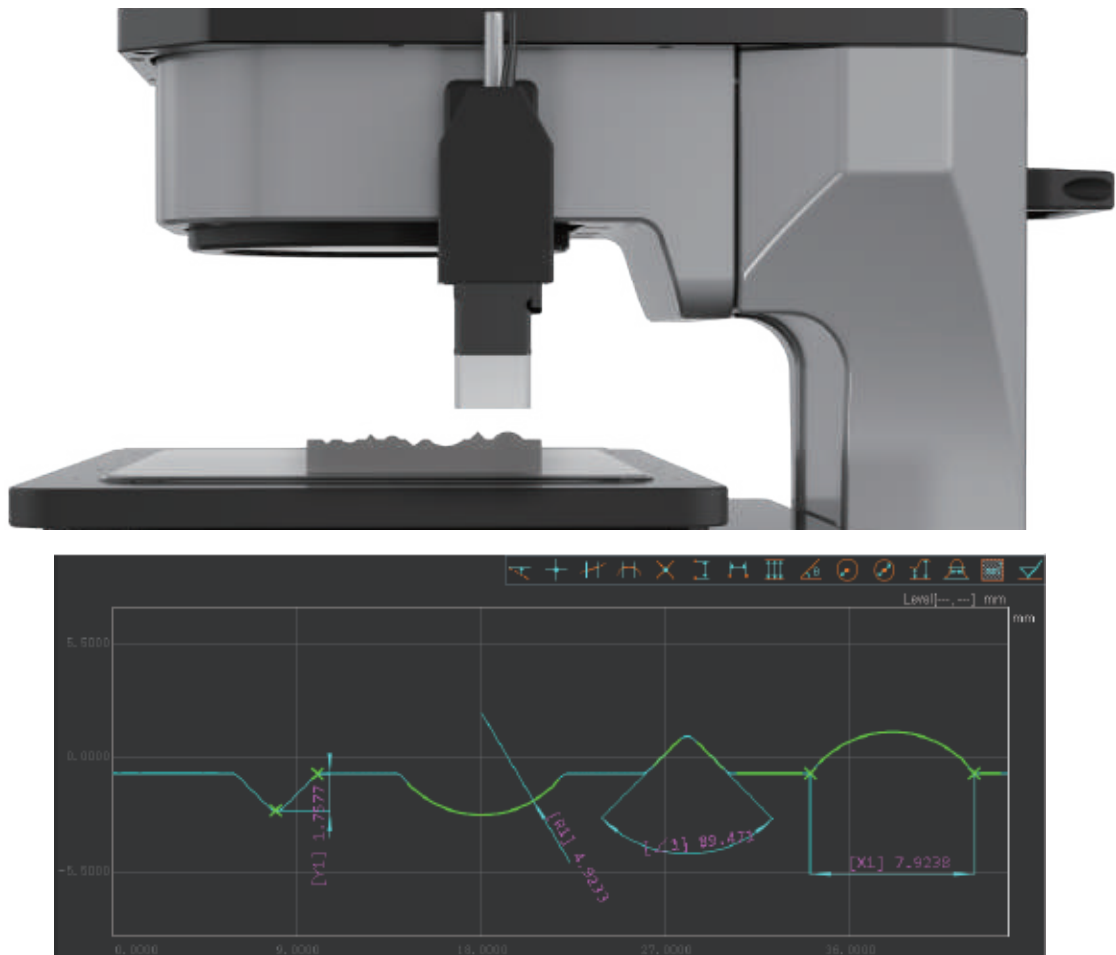

It is a white light confocal probe, and can be used to measure thickness, height difference, flatness, parallelism, etc. Moreover, this probe can scan the contour of the sample.


Rotary chuck

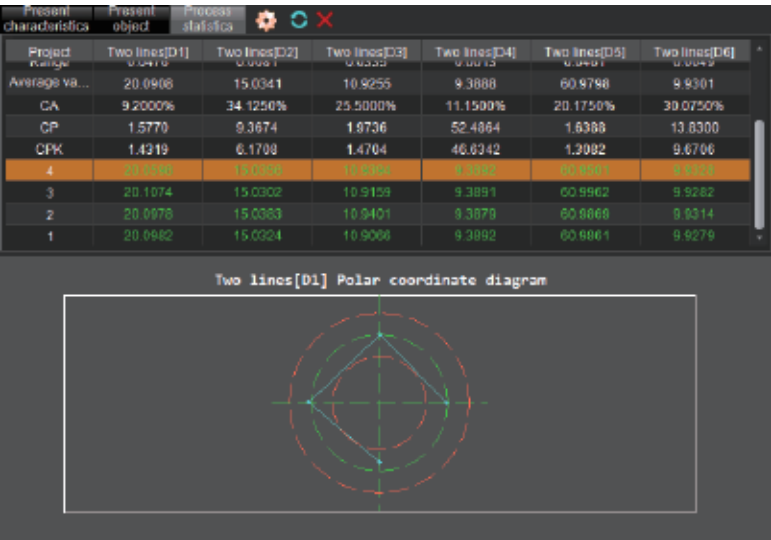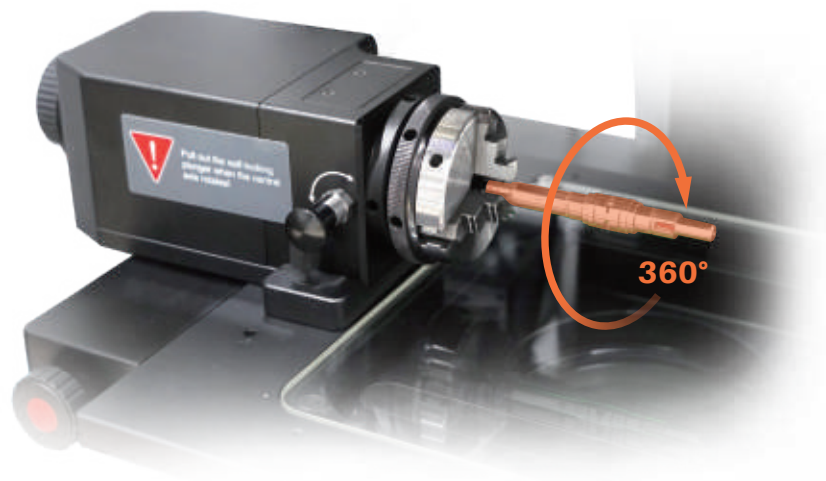

Rotary chuck can rotate 360°. It is convenient to measure the sizes in different section according to rotation angle specified by the operator. It is an ideal solution to measure all kinds of cylindrical parts, such as shaft, etc.

Software


VisionX professional visual measurement software is completely independently developed by CHOTEST, and CHOTEST has independent intellectual property rights. VisionX has friendly user interface, convenient operation, powerful and practical functions, support more than 80 kinds of extraction and analysis tools, including feature extraction tool, auxiliary tool, annotation tool and special application tool, etc. Moreover, functions can be customized according to user's need, so as to improve work efficiency more effectively.

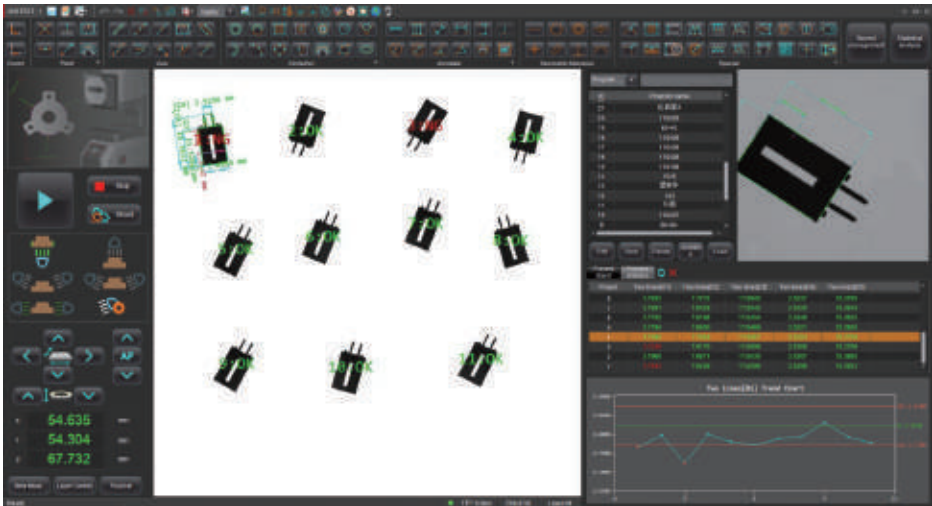

Home Interface


Features

Geometric Tolerance	Straightness, Roundness, Concentricity, Symmetry, Positional Tolerance, Parallelism, Perpendicularity, Profile Tolerance, etc.
CNC Mode	Modify CNC program anytime, as well as adding or reducing features OK or NG is concluded according to tolerance in CNC program
Automatic	Only need to select the measuring features, after placing the workpiece, measuring results can be obtained quickly by one key
Coordinate System	Can create coordinate system by Point-line, Line-line, and translate & rotate coordinate system, as well as create multi-coordinate system
Special tools	Rounded corner, Contour, Thread, Slot, Perimeter, Pitch distance, Thickness, Chamfer, Spring, Gear, Sealing gasket, Area, Pitch Angle, Boundary width

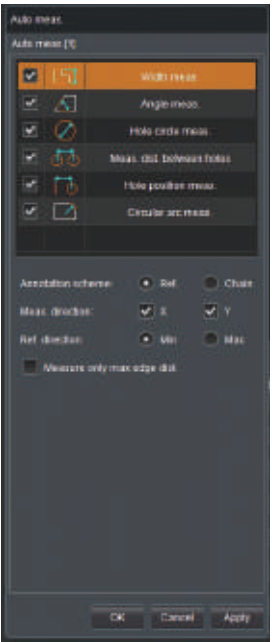


DXF Import

Measurement program can be established by importing drawing in dxf, dwg, ger, gbr, bmp, pdf. Even if the test object is not physically available, you can still create measurement programs quickly. The system can automatically assign features and dimensions from the DXF drawing to the sample, including surface dimensions.

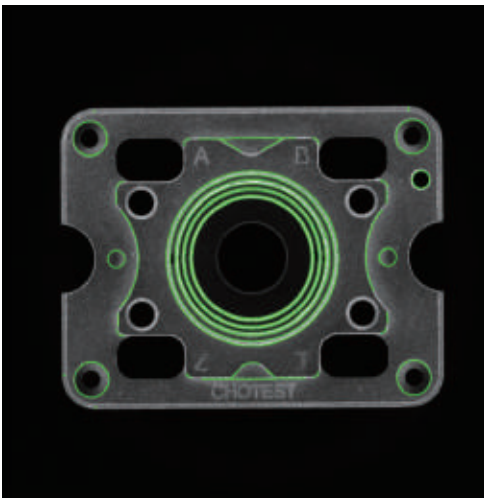

Sample

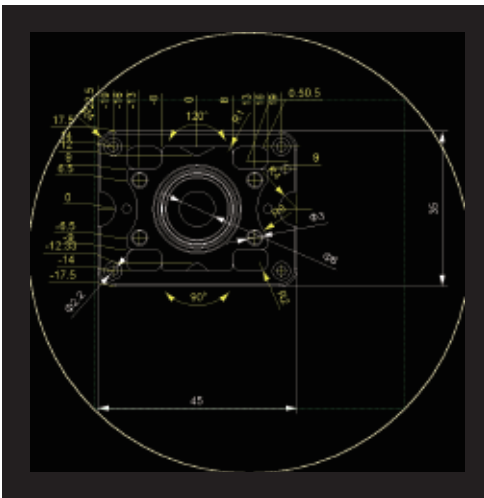


Automatically assign DXF features to the sample

Work with Robot


Measurement data is transmitted to the MES system of the customer via socket or HTTP protocols in real time.

VisionX also could receive commands from the external server to load the program and begin measurement, so it is compatible with robotic arms to achieve unmanned measurements.

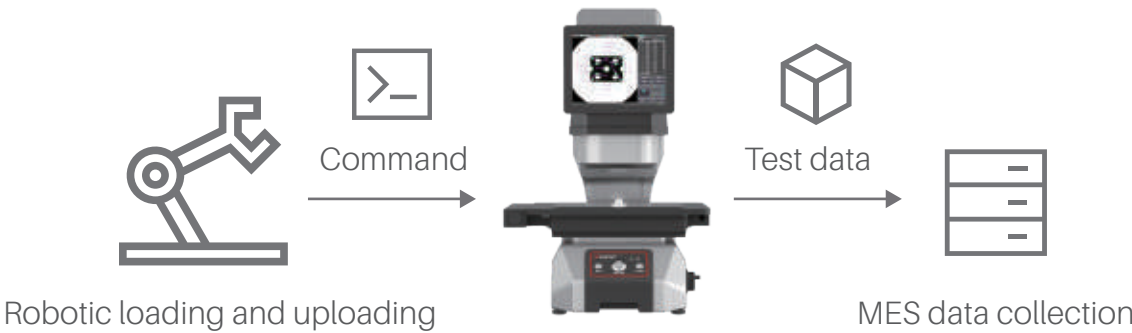


Profile tolerance

- This tool has three evaluation methods: No reference (only shape error evaluation), Single reference, Multiple references.

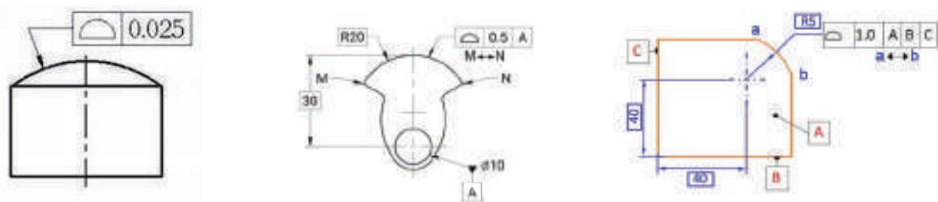


- Multiple annotations: Multiple profile tolerance can be annotated in a single program.No need to establish a coordinate system: Just need to enter the reference in the drawing .Measure-ment of profile tolerance in different coordinate systems can be achieved in a single program.
- Multiple types: Evaluate the profile tolerance by scanning the entire contour; Or evaluate the profile tolerance by measuring point with specifying coordinate values.

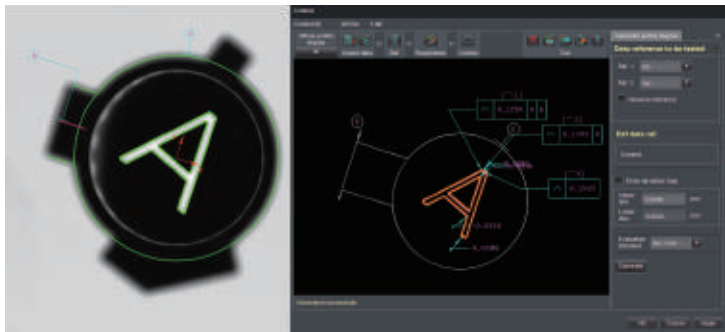

Position Tolerance

It can measure both point position tolerance and line position tolerance. Evaluation can be performed by XY coordinates in Cartesian coordinate system or radius & angle in polar coordinate system.

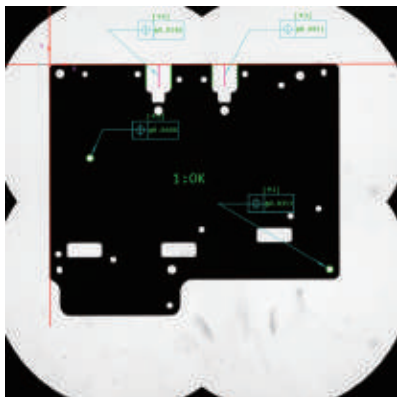


Statistical Analysis


The statistical analysis interface has the tabs of [Statistical Value], [Trend Chart], [Histogram] and [Data List]

■ Automatic recording and sorting

Measurement results and its main statistical information (e.g. average value, σ , 3σ , 6σ , Ca, Cp, Cpk etc) will be automatically recorded and saved. Operator could search records by different conditions.

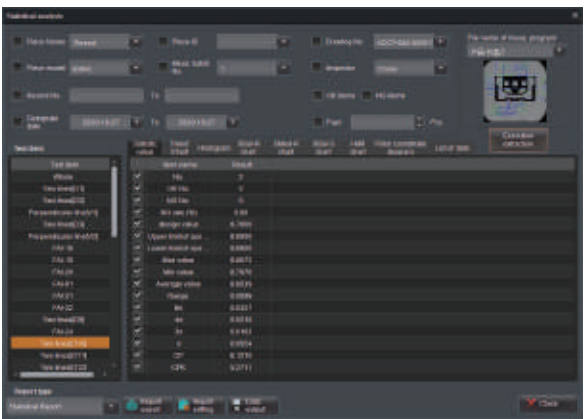

Statistic

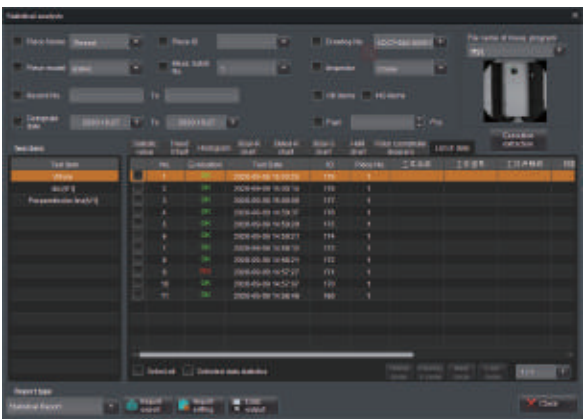


Tabled data


■ Control production process and improve product quality

The trend chart monitors the abnormalities of generating equipment and production process by regularly changing trend of measured values. Such as the monotonic and periodic changes of the measured values.

The histogram reflects the fluctuation and distribution of product quality, and transmits information about process quality, which can be used to judge and predict product quality and unqualified rate.

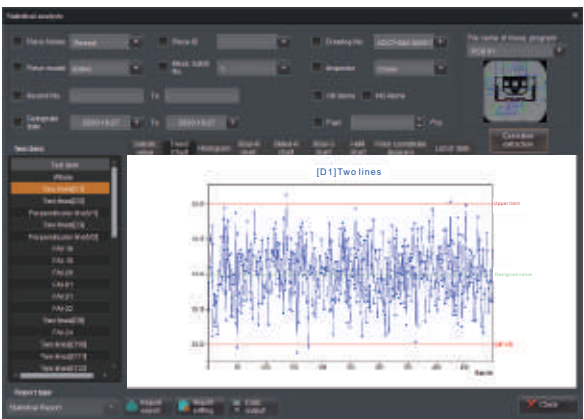

Trend Chart

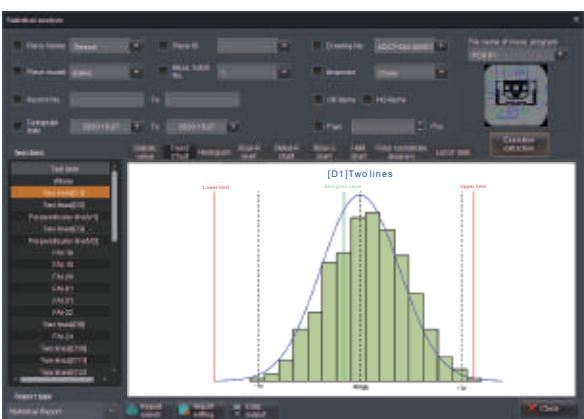

Histogram

Application

Flash measuring machines are widely used in industry of machinery, electronics, mold, injection molding, hardware, rubber, low-voltage electrical appliances, magnetic materials, precision stamping, connectors, connectors, terminals, mobile phones, home appliances, printed circuit boards, medical equipment, watches, tools, etc.



Phone case



Phone accessories



Watch inner parts



Watch chain



Machining parts



Stamping parts



Sheet metal parts



Plastic injection parts



Magnetic component




Cutting tools



Small metal parts




Gear



Rubber ring



Spring




Thread, Shaft



Rigid PCB




Soft PCB



Shielding case



Mask board



Ceramic plate




Car monitor frame




Connectors



Battery




Resistors



Filter mesh



Die cutting



Medical drill



Sieve




Radius gauge




Thread template

Foldable Screen of Mobile Phone

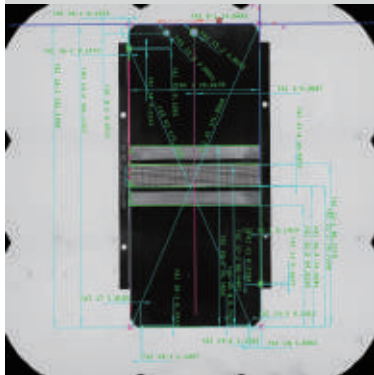


Phone Casing

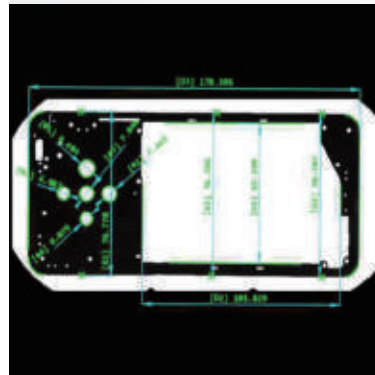


Shielding Covers




Shield slot

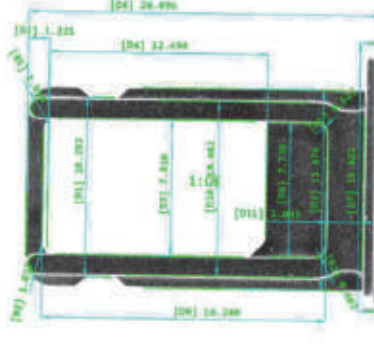


Back Cover Glass of Mobile Phone

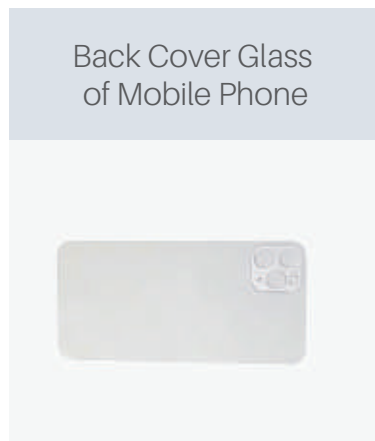

Plastic

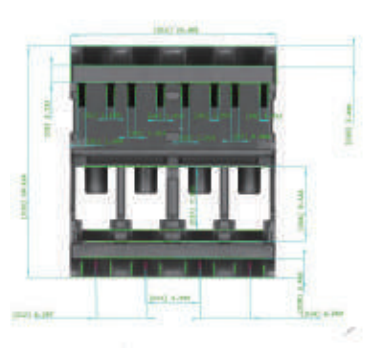

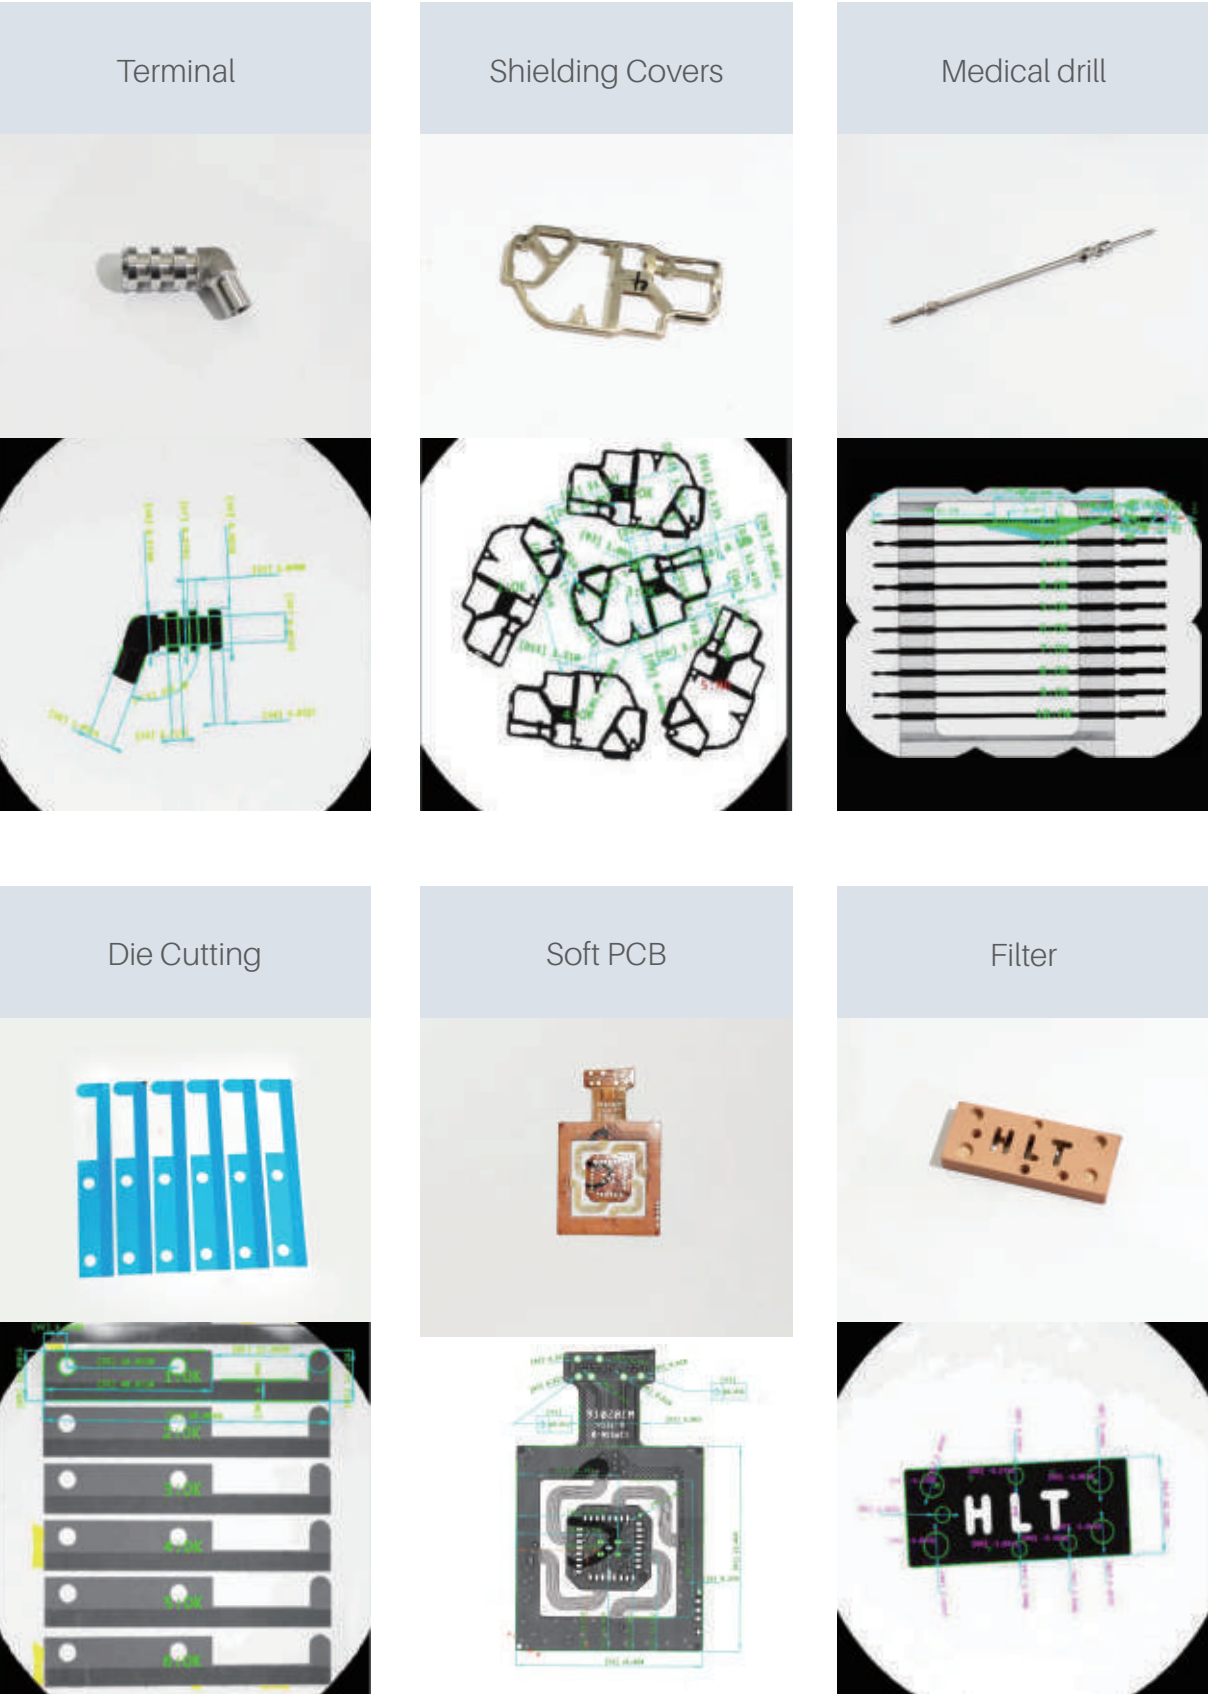

Parameters

Model No.			VX8100	VX8200	VX8300	VX8306D
Image Senor			20MP CMOS			
Monitor	Built-in		10.4" LCD (XGA: 1024x768)			
	Outside		24" LCD XGA(1920x1080)(Optional)			
Acceptance Lens			Double Telecentric Lens			
Light	Ring Light		Four-segment illumination(White Light)			
	Back Light		Telecentric transmission illumination(Green Light)			
	Coaxial Light(Optional)		LED parallel light			
F.O.V.	Wide Field(mm)		200x100 (4 Angles R50)	200x200 (4 Angles R50)	300x200 (4 Angles R50)	230x130
	High Precision(mm)		130x20	130x130	230x130	216x116
Resolution			0.1μm			
Repeatability of Image Meas.	Wide Field	Table Non-Moving*1	±1μm			±0.5μm
		Table Moving*2	±2μm			±1μm
	High Precision	Table Non-Moving*1	±0.5μm			±0.1μm
		Table Moving*2	±1.5μm			±0.5μm
Accuracy of Image Meas.	Wide Field	Table Non-Moving*1	±3μm			±1.5μm
		Table Moving*2	±(5+0.02L)μm			±(3+0.02L)μm
	High Precision	Table Non-Moving*1	±1.5μm			±0.7μm
		Table Moving*2	±(3+0.02L)μm			±(2+0.02L)μm
Horizontal Rotary Unit (Optional)	Rotation Angle		_____	Range 360°, Resolution 0.02°		
	Rotation Speed		_____	0.2~2rev/s		
	Max Diameter		_____	Φ60mm		
Height Meas. (Optical Probe) (Optional)	Measuring Range(X*Y)		_____	120*110mm		
	Max Depth/Diameter(H/Φ)		_____	1.64		
	Dia. of Beam		_____	Φ100μm(Φ18μm optional)		
	Resolution		_____	0.25μm		
	Z Non-movement	Range(Z)	_____	±2mm		
		Accuracy	_____	±2μm		
	Z Movement	Range(Z)	_____	75mm		
Accuracy		_____	±(6+0.01H)μm, H is Z movement height in mm			
XY Object Table	X Travel Range		110mm		210mm	
	Y Travel Range		/	110mm		
	Loading Capacity		2kg	7.5kg		
Z-Axis Travel Range			35mm	75mm		
Size(LxWxH) mm			500x280x670	531x386x731	531x503x731	
Weight			30kg	49kg	75kg	
Input			AC100~240V, 50/60Hz, 2A, 300W			
Working Environment			Temp.10 °C~35 °C, Humidity 20~80%, Vibration<0.002g, Less than15Hz			

Note:
* 1 In the focus position, the environment temperature is +20 °C ± 1.0 °C
* 2 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 2 kg or less;
L is the moving range of the table (mm)

Parameters

Model No.		VX1060	VX1100
Image Senor		20MP CMOS	
Monitor		24" LCD(XGA:1920×1080)	
Acceptance Lens		Double Telecentric Lens	
Light	Ring Light	Four-segment illumination(White Light, Manual up & down)	
	Back Light	Telecentric transmission illumination(Green Light)	
F.O.V.		Φ60mm	Φ100mm
Repeatability of Image Meas.		±1μm	±1μm
Accuracy of Image Meas.*1		±2μm	±3μm
Software		VisionX	
Resolution		0.1μm	
Z Axis Travel Range		35mm	
Loading Capacity		5kg	
Size(L×W×H)		500×280×670mm	
Weight		25kg	
Input		AC100~240V, 50/60Hz, 2A, 300W	
Working Environment		Temp.10°C~35°C, Humidity 20~80%, Vibration<0.002g, Less than15Hz	

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C

Parameters

Model No.	VX4230S	VX4230
Image Senor	25MP CMOS	12MP CMOS
Outside Monitor	24" LCD (XGA: 1920×1080)	
Acceptance Lens	Double Telecentric Lens	
Back Light	Parallel transmission illumination(White Light)	
F.O.V	Φ230mm	200x150mm
Depth of Field	50mm	50mm
Working Distance	400mm	
Repeatability	±2μm	
Accuracy of Image Meas.*1	±5μm	
Z Axis Rravel Range	65mm	100mm
Software	VisionX	
Resolution	0.1 μm	
Loading Capacity	15kg	
Size(L×W×H)	830×605×1500mm	
Weight	375kg	
Input	AC100~240V, 50/60Hz, 4A, 600W	
Working Environment	Temp.10°C~35°C, Humidity 20~80%, Vibration<0.002g, Less than15Hz	

Note:
*1 In the focus position, the environment temperature is +20 °C ± 1.0 °C

Parameters

Model No.		VX5100
Image Senor		5MP CMOS
Outside Monitor		24" LCD (XGA: 1920×1080)
Acceptance Lens		Double Telecentric Lens
Back Light		Telecentric transmission illumination
F.O.V.		φ100mm
Repeatability		±2μm
Accuracy *1		±5μm
Software		VisionX
Resolution		0.1μm
Motorized XY Object Table (Optional)	Rotational Speed	0.2 ~2 Revolutions/s
	Diameter	φ60mm
	Capacity	3kg
Size(L×W×H)		736×200×325 mm
Weight		25kg
Input		AC100~240V, 50/60Hz, 1.3A, 150W
Working Environment		Temp. 10 °C~35 °C, Humidity 20~80%, Vibration<0.002g, Less than 15Hz

Note:
* 1 In the focus position, the environment temperature is +20 °C ± 1.0 °C

Parameters

Model No.			VX 3500	VX 8500
Image Senor			5MP CMOS	20MP CMOS
Monitor			24"LCD(XGA :1920x1080)	
Acceptance Lens			Double Telecentric Lens	
Light	Ring Light		Four-segment illumination(White Light/Green Light)	
	Back Light		Telecentric transmission illumination(Green Light)	
F.O.V.	Large Field		500x400mm(4 Angles R50)	
	High Precision		430x330mm	
Resolution			0.1μm	
Repeatability of Image Meas.	Wide Field	Table Non-Moving*1	± 1μm	± 1μm
		Table Moving*2	± 2μm	± 2μm
	High Precision	Table Non-Moving*1	±0.5μm	±0.5μm
		Table Moving*2	± 1.5μm	± 1.5μm
Accuracy of Image Meas.	Wide Field	Table Non-Moving*1	±5μm	±3μm
		Table Moving*2	± (7+0.02 L) μm	± (5+0.02L) μm
	High Precision	Table Non-Moving*1	± 2μm	± 1.5μm
		Table Moving*2	± (4+0.02L) μm	± (3+0.02L) μm
Horizontal Rotary Unit (Optional)	Rotation Angle		Range 360°, Resolution 0.02°	
	Rotation Speed		0.2~2rev/s	
	Max Diameter		Φ60mm	
Height Meas. (Optical Probe) (Optional)	Measuring Range(X*Y)		300*300mm	
	Max Depth/Diameter(H/Φ)		1.64	
	Dia. of Beam		Φ100μm(Φ18μm optional)	
	Resolution		0.25μm	
	Z Non-movement	Range(Z)	±2mm	
		Accuracy	± 2μm	
	Z Movement	Range(Z)	200mm	
		Accuracy	± (6+0.01H)μm, H is Z movement height in mm	
XY Object Table	X Travel Range		410mm	
	Y Travel Range		310mm	
	Loading Capacity		20kg	
Z- Axis Travel Range			200mm	
Size(LxWxH)			900x1340x1600mm	
Weight			950kg	
Input			AC100~240V, 50/60Hz, 10A, 2500W	
Working Environment			Temp.10 °C~35 °C , Humidity 20~80%, Vibration <0.002g, Less than 15Hz	

Note:
* 1 In the focus position, the environment temperature is +20 °C ± 1.0 °C
* 2 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 2 kg or less;
L is the moving range of the table (mm)

Flash Measuring Machines Hybrid Series



Description

Composite Flash Measuring Machine Hybrid series is an advanced fully automatic image measuring instrument. It adopts a hybrid architecture of an electric zoom lens and a large double-telecentric lens, offering high precision measurement for the small & complicated features by the electric zoom lens and efficient measurement for the big & easy features by the large double-telecentric lens, so it achieves an optimized combination of precise and efficient measurement.

Composite Flash Measuring Machine Hybrid series can be used in machinery, electronics, molds, injection molding, hardware, rubber, low-voltage electrical appliances, magnetic materials, precision stamping, connectors, connectors, terminals, mobile phones, home appliances, printed circuit boards, medical equipment, watches and clocks , cutting tools, measurement and testing and other fields.

Parameters

Model No.		Hybrid432	Hybrid682
Travel range	X	400mm	600mm
	Y	300mm	800mm
	Z	200mm	200mm
Structure Type		Column	Moving Bridge
Base Material		Granite	
Monitor		24" LCD (1920x1080)	
Resolution of Glass Scale		0.1μm	
Guide Rail		Precision linear guide rail	
High-resolution Electric Zoom Lens	Lens	13.3X Motorized lens	
	Magnification*1	Optical zoom: 0.6~8.0X, Image Zoom: 17~232X	
	Image Sensor	HD colorful industrial camera	
	Single F.O.V.	1mm×1mm~12mm×12mm	
	Measuring Range	360×310mm	610×800mm
	Meas. Accuracy (XY)*2	(1.8+L/200)μm	(2.2+L/200)μm
	Meas. Accuracy (Z)*3	(2.8+L/200)μm	
	Bottom	Telecentric transmission Illumination (Green Light)	
	Ring	6 rings and 8 segments light (White light)	
	Coaxial Light	LED light	
Double Telecentric Wide F.O.V Optical Lens	Lens Spec.	Φ100mm double telecentric lens	
	Single F.O.V.	90×90mm	
	Measuring Range	460X330mm (4 Angles R50)	580X800mm (4 Angles R50)
	Accuracy of Single F.O.V.*4	±4μm	
	Stitching Accuracy*2	(4+L/200)μm	(6+L/200)μm
Max Speed	XY	500 mm/s	
	Z	200 mm/s	
Size		910×1350×1700mm	1600×1860×1700mm
Weight		700kg	2300kg
Loading Capacity		25kg	50kg
Power Supply		2000W	2500W
Motion Control		Servo control system	
Software		Vision X	
Input		AC200~240V, 50/60Hz	
Working Environment		Temp. 20°C±2°C, Humidity 20~80%, Vibration<0.002g, Less than 15HZ	

Note :

*1 Image magnification is approximate and depends on monitor size and resolution.


*2 In the focus position, the environment temperature is +20 °C ± 1.0 °C, and the load on the table is 5 kg or less; L is the moving range of the table in mm.

*3 It is mechanical accuracy, and actual accuracy depends on object surface where lens focuses.

*4 In the focus position, the environment temperature is +20 °C ± 1.0 °C.

SuperView W1 3D Optical Surface Profilometer

White Light Interferometry
Nano 3D Surface Form and Roughness




Unique re-establishment algorithm can filter noises of surface of test object.




Interference Lens


Different magnification lenses are selectable for various test objects with smooth or coarse surface



Super smooth lens



Abraded surface



Vacuum Object Table

Vacuum Object Table is specially customized for semi-conducting wafers, so influence from feeble air flowing to test object is eliminated in measurement



Air-Bearing Isolation System

Built-in air bearing isolation system can isolate the vibration. Air pressure of the machine can be supplied by air compressor or inflators.



Sonic Vibration Isolation

The shell is separated from the internal motion unit, which effectively isolates the transmission of sound wave vibration.



Easy Level

Improve the re-establishment accuracy and adjust stripe width by adjusting tilt of object table



Convenient joystick

Easy to control X/Y/Z movement, speed and light source brightness; Emergency stop button








Application

It is used for measurement and analysis of surface roughness and profile of precision components from industries of semi-conductor, 3C Electronics, ultraprecise machining, optical machining, micro-nano materials, micro-electro-mechanical system.


SemiConductor	»»	Cut sheet, coated sheet, wafer IC	»»	Roughness, microcosmic	»»	
3C Electronics	»»	Sapphire screen, glass screen, Ink screen	»»	Roughness, flatness, step height	»»	
Optics	»»	Precision mould, optical lens	»»	Roughness, flatness, profile, radius of curvature	»»	
MicroNano Materials	»»	Film on PET substrate	»»	Film roughness, film thickness	»»	
Tribology	»»	CSM friction/Abraded components	»»	Surface profile, Surface roughness, area, volume	»»	

Application Cases

Measurement and analysis for various products, components and materials' surface form and profile characteristics, such as flatness, roughness, waviness, appearance, surface defect, abrasion, corrosion, gap, hole, stage, curvature, deformation, etc.

Surface form		»»		»»	
Profile sizes		»»		»»	
Surface roughness		»»		»»	

XtremeVision 3D Software

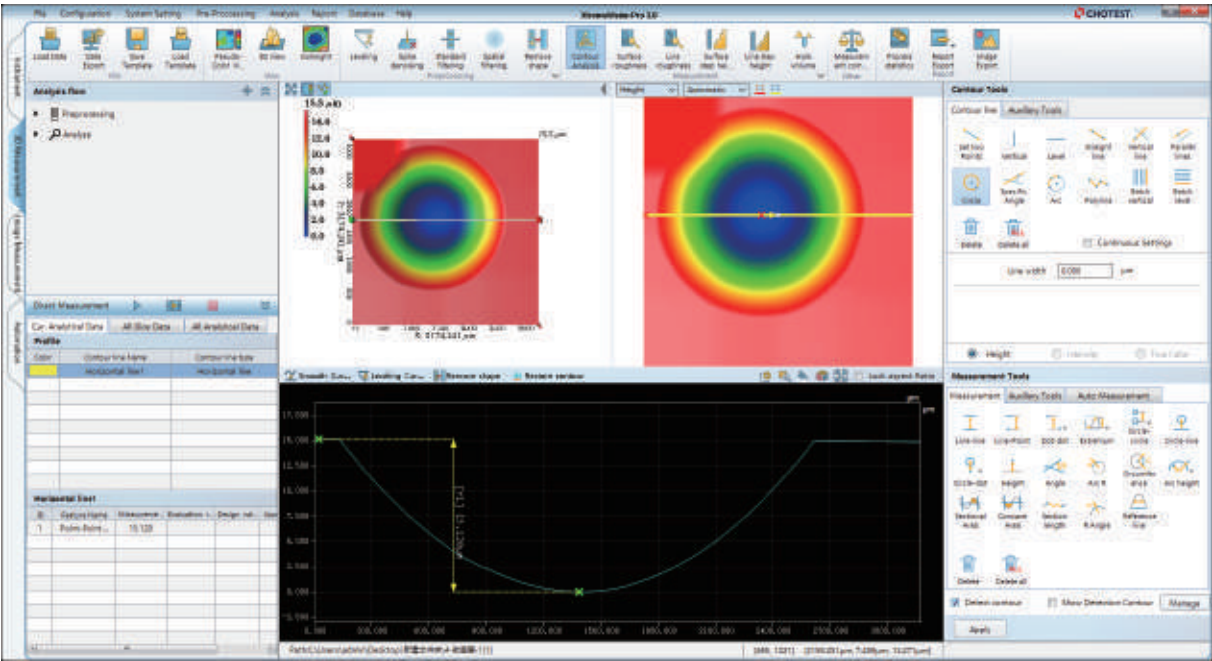

The second-generation self-developed microscopic 3D measurement software integrates four modular functions: Image scanning, 3D analysis, Image measurement, and Automated measurement. It can perfectly adapt to all microscopic 3D machine models of CHOTEST W series & VT series & WT series, and can independently identify the type of model. Especially, the software can automatically switch scanning modes between white light interferometry and confocal microscopy on 2-in-1 Hybrid 3D Optical Profilometer. Xtremevision Pro has transplanted the successful experience of CHOTEST in the field of image flash measurement, which can automatically match and measure XY plane dimensions such as point-line distance, angle, radius, etc.

Lens Specification

Zoom ratio of lens			2.5x	5x	10x	20x	50x	100x
Numerical hole diameter			0.075	0.13	0.3	0.4	0.55	0.7
Optical resolution @550nm(μm)			3.7	2.1	0.92	0.69	0.5	0.4
Depth of focus(μm)			48.6	16.2	3.04	1.71	0.9	0.56
Working distance(mm)			10.3	9.3	7.4	4.7	3.4	2.0
F.O.V. H×V (mm)	Video system 1024x1024	0.375x	5.2x5.2	2.6x2.6	1.3x1.3	0.65x0.65	0.26x0.26	0.13x0.13
		0.5x	3.84x3.84	1.92x1.92	0.96x0.96	0.48x0.48	0.192x0.192	0.096x0.096
		0.75x	2.56x2.56	1.28x1.28	0.64x0.64	0.32x0.32	0.128x0.128	0.064x0.064
		1x	1.92x1.92	0.96x0.96	0.48x0.48	0.24x0.24	0.096x0.096	0.048x0.048

Parameters

Model No		SuperView W1	SuperView W1-Pro	SuperView W1-Ultra	SuperView W1-Lite
Light Source		White LED			
Video System		1024×1024			
Objective Lens		Standard: 10X(Optional: 2.5X, 5X, 20X, 50X, 100X)			
Optical Zoom		Standard: 0.5X Optional: 0.375X, 0.75X, 1X			Standard: 0.5X Optional: 0.375X, 0.75X
Standard Field of View		0.98×0.98 mm		1.1×1.1 mm	0.98×0.98 mm
Lens Turret		Manual 3 holes turret(Optional: Motorized 5 holes turret)			Motorized 5 holes turret
XY Object Table	Size	320×200mm	300×300mm	320×200mm	220×220mm
	Travel Range	140×100mm	200×200mm	140×100mm	100×100mm
	Load Capacity	10kg			
	Control Method	Motorized			
Tilt(manual)		±4°	±4°	±4°	±3°
Z Axis	Travel Range	100mm	100mm	100mm	50mm
	Control method	Motorized			
Z Stroke Scanning Range		10mm			
Surface Topography Repeatability*1		0.1nm			
Roughness RMS Repeatability*2		0.005nm			0.01nm
Step Height Measurement*3		Accuracy: 0.3%; Repeatability: 0.08%(1σ)			Accuracy: 0.7% Repeatability: 0.1%(1σ)
Scanning Speed@0.1nm Resolution		1.85μm/s	1.85μm/s	16μm/s	1.65μm/s
Weight		140 kg	170 kg	140 kg	50 kg
Size(L×W×H)mm		700×600×900	750×650×950	700×600×900	500×400×700
Operating Environment	Temperature	0°C~30°C, fluctuation <2°C/60min			
	Humidity	5%~95% RH, no condensation			
	Vibration	VC-C or better			
	Software Noise Evaluation*4	3σ≤4nm			
	Compressed Air	0.6Mpa oil-free, water-free, 6mm diameter of hose			
		AC100~240V, 50/60Hz			
	Power Supply	200W	200W	200W	120W
Other		No strong magnetic field, No corrosive gas			

Note:
*1 Use EPI mode to measure Sa 0.2nm silicon wafer in the laboratory environment; Single stripe, 80μm filter for full field of view.
*2 Measure Sa 0.2nm silicon wafer in a laboratory environment according to the ISO 25178.
*3 Measure standard 5μm steps height block in a laboratory environment according to the ISO 1060-1:2009.
*4 When the software noise evaluation is 4nm≤3σ≤10nm, the Roughness RMS repeatability is revised down to 0.015nm, the Step height measurement accuracy is revised down to 0.7%, and the step height measurement repeatability is revised down to 0.12%; When the software noise evaluation is 3σ>10nm, the environment does not meet the requirement for usage of the equipment, and need to change the site.

SuperView W3

3D Optical Surface Profilometer

Large-scale microscopic 3D form and roughness

- Large table
- Applicable for 12" wafer
- One-key automatic measurement



Dedicated Functions for Semiconductor Field

- Measure profile trenches after laser grooving in the dicing process.
- Measure film step-height of wafer ranging from 1nm~1mm.
- Measure roughness of silicon cut sheet after grinding process, and can measure dozens of small areas to obtain the average value by one click.
- Support 6", 8" and 12" wafer measurement, and easy switch between 3 sizes of vacuum chucks by one click automatically.

Parameters

Model No		SuperView W3	SuperView W3-Ultra
Light Source		White LED	
Video System		1024×1024	
Objective Lens		Standard: 10X(Optional: 2.5X, 5X, 20X, 50X, 100X)	
Optical Zoom		Standard: 0.5X Optional: 0.375X, 0.75X, 1X	
Standard Field of View		0.98×0.98 mm	1.1×1.1 mm
Lens Turret		Motorized 5 holes turret	
XY Object Table	Size	450×450mm	
	Travel Range	300×300mm	
	Load Capacity	10kg	
	Control Method	Motorized	
Tilt		±5° Motorized	
Z Axis	Travel Range	100mm	
	Control method	Motorized	
Z Stroke Scanning Range		10mm	
Surface Topography Repeatability*1		0.1nm	
Roughness RMS Repeatability*2		0.005nm	
Step Height Measurement*3		Accuracy: 0.3%; Repeatability: 0.08%(1σ)	
Scanning Speed@0.1nm Resolution		1.85μm/s	16μm/s
Weight		750 kg	
Size(L×W×H)mm		1000×800×1550	
Operating Environment	Temperature	0°C~30°C, fluctuation <2°C/60min	
	Humidity	5%~95% RH, no condensation	
	Vibration	VC-C or better	
	Software Noise Evaluation*4	3σ≤4nm	
	Compressed Air	0.6Mpa oil-free, water-free, 6mm diameter of hose	
	Power Supply	AC100~240V, 50/60Hz, 300W	
	Other	No strong magnetic field, No corrosive gas	

Note:
*1 Use EPSI mode to measure Sa 0.2nm silicon wafer in the laboratory environment; Single stripe, 80μm filter for full field of view.
*2 Measure Sa 0.2nm silicon wafer in a laboratory environment according to the ISO 25178.
*3 Measure standard 5μm steps height block in a laboratory environment according to the ISO 1060-1:2009.
*4 When the software noise evaluation is 4nm≤3σ≤10nm, the Roughness RMS repeatability is revised down to 0.015nm, the Step height measurement accuracy is revised down to 0.7%, and the step height measurement repeatability is revised down to 0.12%; When the software noise evaluation is 3σ>10nm, the environment does not meet the requirement for usage of the equipment, and need to change the site.

SuperView WT Series

Hybrid 3D Optical Profilometer



Description

The Hybrid 3D optical profilometer Superview WT series is used for sub nanometer measurement of surfaces of various precision components and materials. It integrates the performance characteristics of two high-precision 3D measuring instruments, white light interferometer and confocal microscope, and can perform non-contact scanning of the samples surface then re-establish 3D surface image. When measuring the ultra smooth and transparent surfaces, white light interferometry mode can be used to obtain high-precision and distortion-free images, and analyze parameters such as roughness. When measuring coarse surfaces with sharp angle features, confocal microscopy mode can reconstruct large angle 3D topography images, and 2D & 3D parameters reflecting surface quality are obtained by data processing and analysis of surface 3D images through software.

Technical Parameters

Adding W-Ultra high-speed scanning module can increase scanning speed by several times.

Model		SuperView WT3000	SuperView WT3200
Light Source		White Light LED	
Video System		1024x1024	
Interference Objective Lens		10X(2.5X, 5X, 20X, 100X optional)	
Confocal Objective Lenses		10X, 50X(5X, 20X, 100X optional)	
Standard Field of View		1.2x1.2mm (10X)	
Lens Turret		Motorized 5-hole turret	
XY Object Table	Size	200x200mm	300x300mm
	Travel Range	100x100mm	200x200mm
	Load Capacity	10kg	
	Control Mode	Motorized	
Tilt		±3°	
Z-axis	Travel Range	100mm	
	Control Mode	Motorized	
Z stroke scanning Range		10mm	
Surface Topography Repeatability STR ^{*1}		0.1nm (White light interferometry)	
Roughness RMS Repeatability ^{*2}		0.005nm (White light interferometry)	
Step Height Measurement ^{*3}		Accuracy: 0.5%; Repeatability: 0.1% (1σ) (White light interferometry)	
Weight		70kg	160kg
Size (L x W x H)		400x480x750mm	600x700x850mm
Operating Environment	Temperature	0 °C~30 °C, fluctuation <2 °C/hour	
	Humidity	5% -95% RH, no condensation	
	Vibration	VC-C or better	
	Software Noise Evaluation ^{*4}	3σ≤4nm	
	Compressed Air	0.6Mpa oil-free and water-free, 6mm diameter of hose	
	Power Supply	AC100-240V, 50/60Hz, 4A, Power 120W	
	Others	No strong magnetic field, no corrosive gas	

Note:
*1 Use EPSI mode to measure Sa 0.2nm silicon wafer in the laboratory environment; Single stripe, 80μm filter for full field of view
*2 Measure Sa 0.2nm silicon wafer in a laboratory environment according to the ISO 25178
*3 Measure standard 5μm steps height block in a laboratory environment according to the ISO 10610-1:2009
*4 When the software noise evaluation is 4nm≤3σ≤10nm, the Roughness RMS repeatability is revised down to 0.015nm, the Step height measurement accuracy is revised down to 0.7%, and the step height measurement repeatability is revised down to 0.12%;

SuperView WX100

White Light Interferometry Probe


In-line roughness and 3D profile inspection



Functions

- Measurement function: it can realize high precision Z scanning of sample surface and obtain 3D image.
- Analysis function: It can obtain 2D and 3D data such as surface roughness, micro-nano-level contour size, etc.
- Programming function: Support pre-configured data processing and analysis tool steps, one-click to complete the whole process from measurement to analysis.
- Batch analysis: Data processing and analysis templates can be customized according to the customer demands, and one-click batch analysis can be realized for the same type of parameter data.

Application

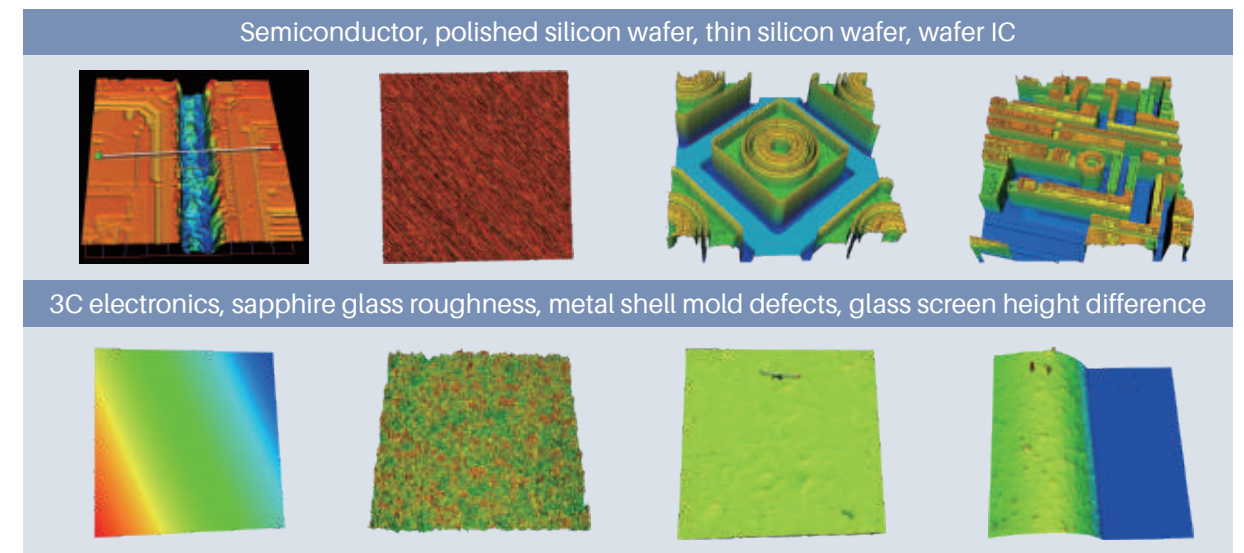

Parameters


Model No.		SuperView WX100
Light Source		White LED
Video System		1024×1024
Objective Lens		10X(2.5X, 5X, 20X, 50X, 100X optional)
F.O.V.		0.98×0.98mm(10X)
Lens Turret		Single hole / 3 holes manual
Size		230×200×380mm
Tilt		±2° Motorized
Z Travel Range		30mm
Z Scanning Range		10mm(Depend on Lens)
Z Resolution		0.1nm
Roughness RMS Repeatability*1		0.01nm
Step Height Measurement	Accuracy*2	0.5%
	Repeatability*2	0.1% 1σ

Note:

*1 Measure Sa 0.2nm silicon wafer in a laboratory environment according to the ISO 25178.

*2 Measure standard 5μm steps height block in a laboratory environment according to the ISO 10610-1:2009.

VT6000 Series Confocal Microscope



VT6100



VT6200



VT6300

Features

1. High precision and high repeatability

1) Based on the rotating confocal optical system, combined with high stability structural design and excellent 3D reconstruction algorithm, the measurement system is jointly composed to ensure the high measurement accuracy of the instrument.

2) The unique shock isolation design can reduce the vibration noise of the bottom surface, the instrument is stable and reliable in most environments, and has good measurement repeatability.

2. All-in-one operation of measurement analysis software

1) The measurement and analysis are operated on the same interface without switching, and the measurement data is automatically counted, realizing the function of rapid batch measurement.

2) The visualization window is convenient for users to observe the scanning process in real time.

3) Combined with the automatic measurement function of the custom analysis template, the multi-region measurement and analysis can be automatically completed.

4) Five functional modules of geometric analysis, roughness analysis, structural analysis, frequency analysis and functional analysis.

5) One-key analysis, multi-file analysis, free combination analysis items are saved as analysis templates, one-key analysis of batch samples, and data analysis and statistical chart functions are provided.

6) More than 300 kinds of 2D and 3D parameters can be measured according to ISO/ASME/EUR/GBT.


3. Precision joystick

The joystick integrated with the displacement adjustment functions in the three directions of X, Y, and Z can quickly complete the pre-measurement works such as stage translation and Z-way focusing etc.

4. Double anti-collision protection measures


In addition to the software ZSTOP setting the lower limit of the Z-direction displacement for anti-collision protection, a mechanical and electronic sensor is designed on the Z-axis. When the lens touches the surface of the sample, the instrument automatically enters an emergency stop state to protect the instrument to the greatest extent and reduce the risk of human operation.





Application

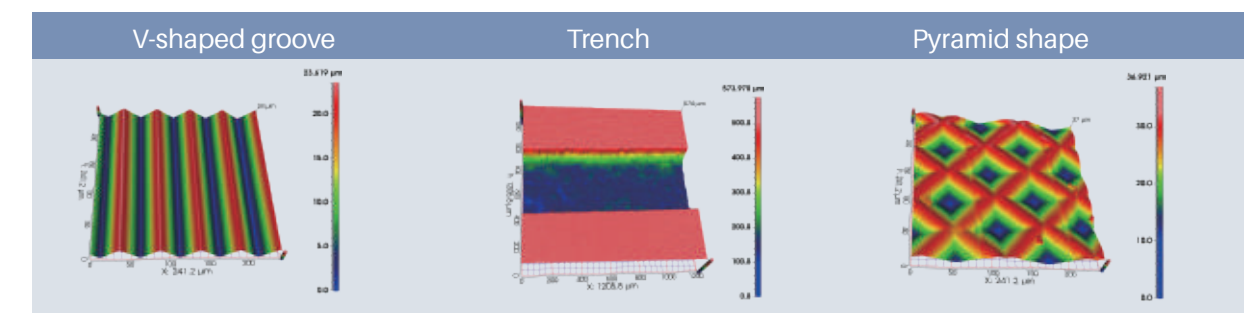

Description

Confocal Microscope VT6000 is dedicated for micro-nano level measurement of various precision components and material surfaces. It can measure the surface of various objects from smooth to rough, low reflectivity to high reflectivity, and the roughness, flatness, micro-geometric profile, curvature, etc. Total more than 300 kinds of 2D and 3D parameters as per four major domestic and foreign standards ISO/ASME/EUR/GBT are provided as evaluation standards.

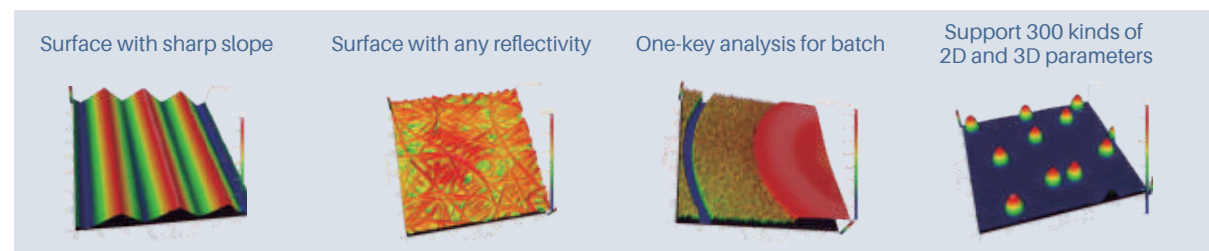

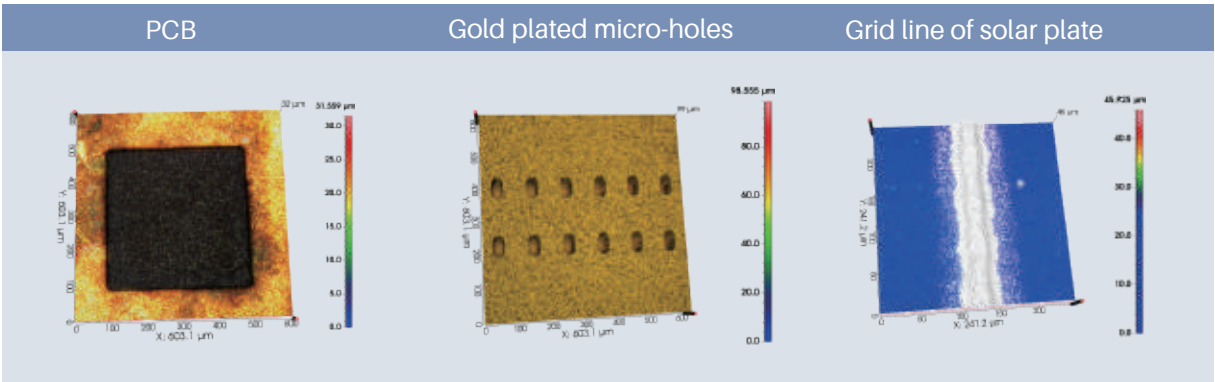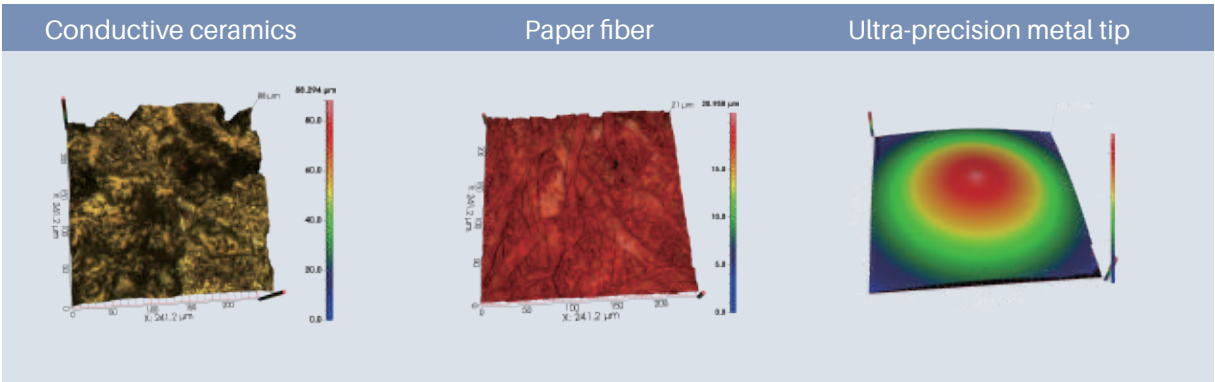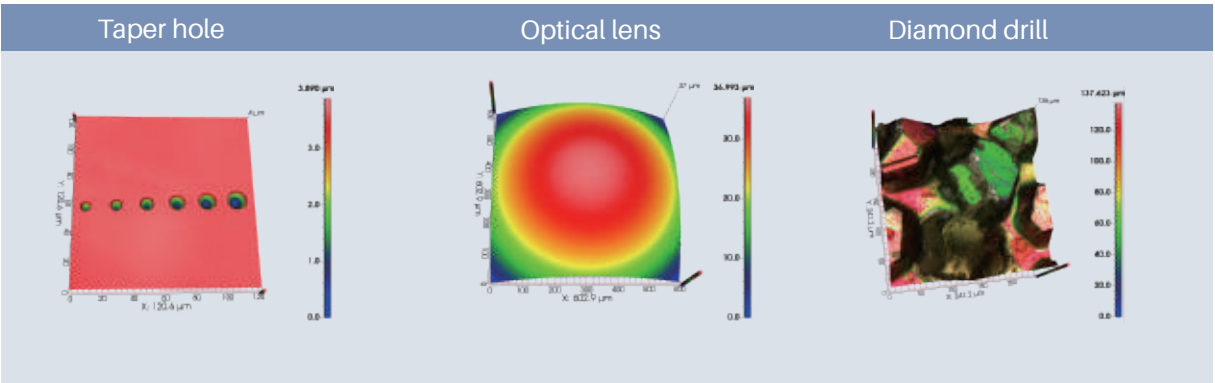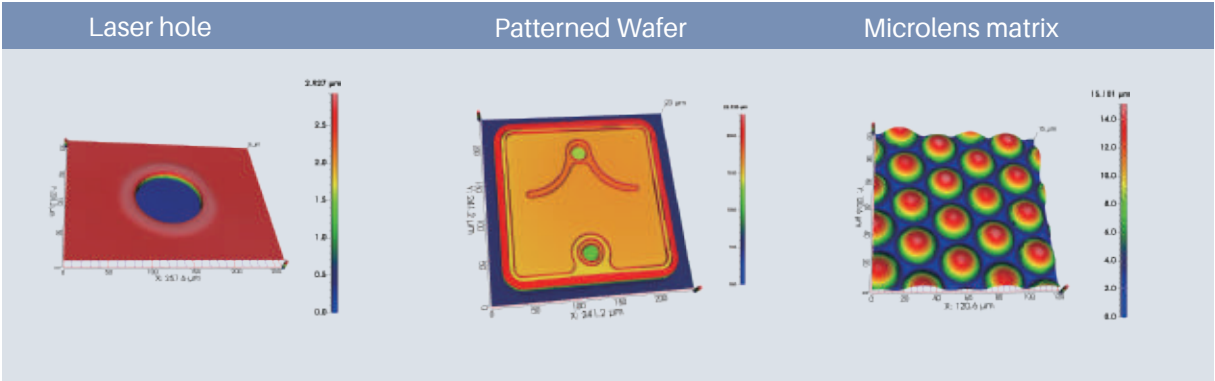

Parameters

Model No.		VT6100	VT6200	VT6300
Size		520×380×600mm	720×580×1500mm	1000×900×1500mm
Weight		50kg	400kg	600kg
Principle		Spinning disk confocal optical system		
Objective Lens		10X, 50X(Optional: 5X, 20X, 100X APO)		
Field of View		120×120 μm~2.4×2.4 mm		
Step Height Measurement	Repeatability(1σ)	≤12nm		
	Accuracy* 1	≤ ± (0.15+L/100) μm		
	Display Resolution	0.1nm		
Width Measurement	Repeatability(1σ)	40nm		
	Accuracy*2	± 2%		
	Display Resolution	1nm		
XY Object Table	Size	200x200mm	230x230mm	450x450mm
	Travel Range	100x100mm	200x200mm	300x300mm
	Load Capacity	10kg		
	Control Method	Motorized		
Z-Axis	Travel Range	100 mm		
	Control Method	Motorized		
Lens Turret		Motorized 5 holes turret		
Light Source		White LED		
Operating Environment	Power Supply	AC100~240V, 50/60Hz, Power 120W		
	Working Temp.	15°C~30°C, fluctuation < 2°C/60min		
	Humidity	5%~95%RH, no condensation		
	Vibration	VC-C or better		
	Other	No strong magnetic field,no corrosive gas		

Note:
* 1 Measure standard 5μm steps height block by 50X Objective lens in a laboratory environment.
*2 Measure standard engraved line block by 50X Objective lens in a laboratory environment.

Scanning Electron Microscope

CEM3000A



Description

The benchtop scanning electron microscope CEM3000A is a precision instrument designed for microscale morphology observation and analysis of material surfaces. Equipped with a secondary electron probe and a backscattered electron probe, supporting both high vacuum and low vacuum modes, it performs high-precision scanning to capture clear morphological images with deep depth of field, high resolution, and high contrast for various types of material surfaces. When used in conjunction with an energy dispersive spectrometer, it enables analyzing the elemental composition of materials.

Features


Desktop, compact size

CEM3000 series desktop SEM is not constrained by site size, offering max spatial applicability. Users can place it conveniently on their desk and easily relocate it, enabling one machine to serve multiple locations.




High Resolution


High resolution enables observation and analysis of extremely small features

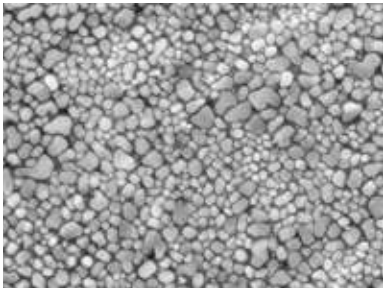

High Resolution

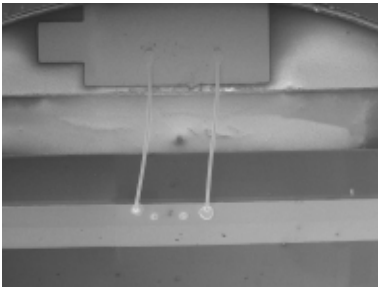

Large Depth of Field

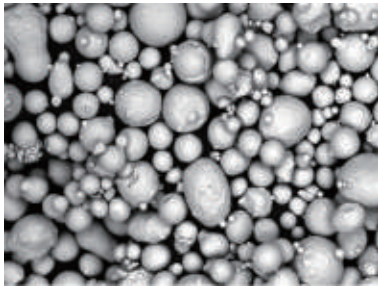

High Contrast

Fast Pumping&Venting


Featuring a unique vacuum system design, this series significantly reduces the waiting time during gas pumping and venting.

Easy to Use

Automatic Beam Alignment / Auto Focus / Auto Stigmation. Using automatic adjustment function, enables rapid imaging and one-click image acquisition.




Automatically judges beam alignment status, and adjusts alignment coils for co-axial alignment.



Calculates image data to adjust objective lens coil value for focusing; adjusts stigmator coils to eliminate astigmatism.

Convenient Operation Setup

SEM CEM3000 series software interface is concise with clear functional guidance, and the convenient joystick allows users to perform routine operations

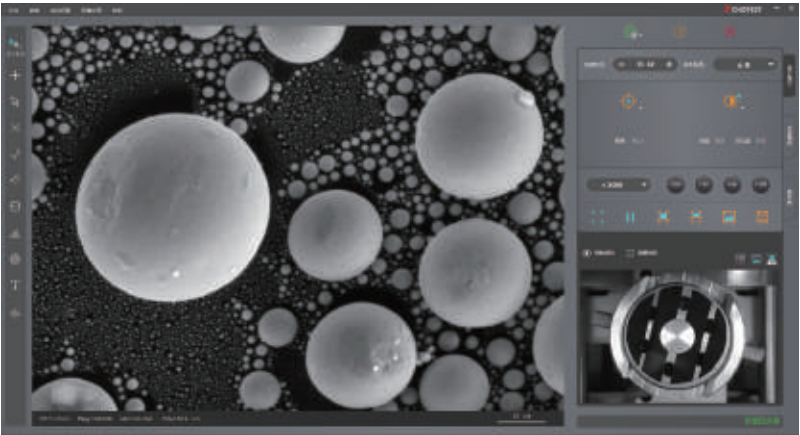


CEM3000 Series Software Interface




Joystick


Application Examples

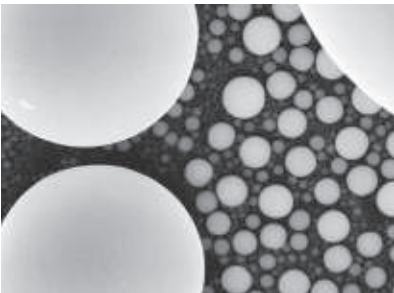


Standard Sample (Solder Ball Particles)

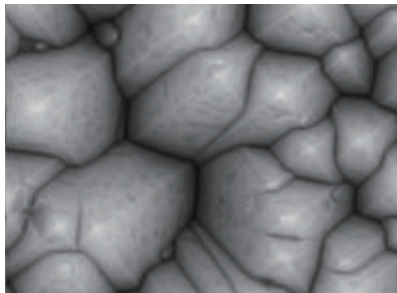


Photovoltaic Industry (Solar Panel)

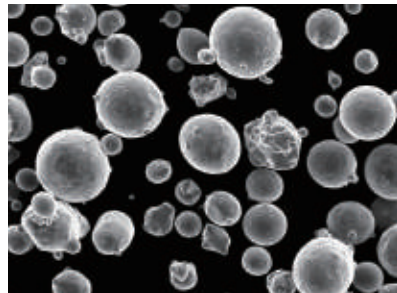


High-Entropy Alloy Powder

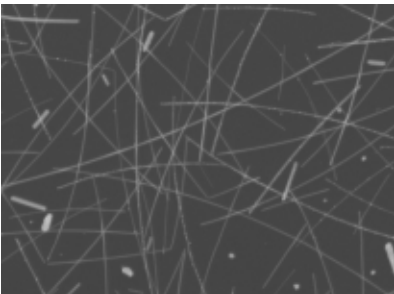


Nanomaterials (60nm diameter Ag wire)

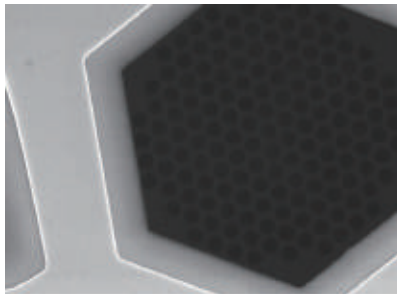


Biomedical (Microfluidic Chip)

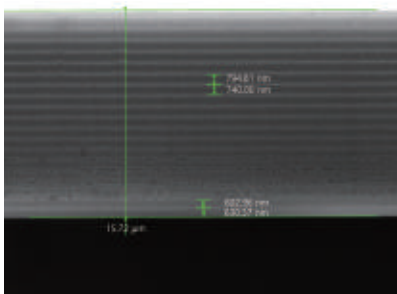

BOSCH Recess Dry Etching TextuPre




O Kα1



Au Ma1



Si Kα1



Element Overlay Distribution Map

Parameters

Product Model		CEM3000A
Electron Gun	Filament	Tungsten Filament
	Resolution	Better than 4nm (SE), better than 8nm (BSE) @20kV
	Accelerating Voltage	1 ~ 20kV
Magnification		Electron Image: 40 ~ 300,000× (Large area stitching, optional)
Detectors	Secondary Electron (SE)	Standard
	Backscattered Electron (BSE)	Standard (4-quadrant high-resolution probe)
	Energy Dispersive Spectrometer (EDS)	Bruker or Oxford(Optional)
Automation Software		Standard: Auto alignment, Auto focus, Auto stigmation, One-click image enhancement
Vacuum System	Vacuum Level	High Vacuum: Better than 9×10 ⁻³ Pa Low Vacuum: 5 ~ 100 Pa (Optional)
	Pumping Time	High Vacuum Mode: < 180s Low Vacuum Mode: < 120s
	Sample Changeover Time:	Vacuum discharge < 30s Vacuum re-pumping < 100s
Object Table	Motorized Axes	X , Y , T
	Manual Axes	R , Z
	Travel Range	X: 50mm
		Y: 50mm
		R: 0°~360° (Manual rotation, E-beam rotation)
		T: -22.5°~ +22.5°
		Z: 45mm
	Max. Sample Size	70mm × 70mm (Horizontal) 45mm (Height)
In-Chamber Cameras	Navigation Camera(Top-View)	Standard high-resolution colorful camera
	Side-View Camera	Standard high-resolution IR camera
Operating System		Windows10 / 11(64bit)
Image Size		640×480, 1280×960, 2560×1920, 5120×3840, 10240×7680
Weight		120kg
Size(W×L×H)		400x670x730mm
Input		200-240VAC, 50/60Hz, 800W
Operating Environment		Working Temp.: 15°C~30°C, fluctuation < 1°C/15min Relative Humidity: <65% , no condensation

Laser Tracker GTS Series

Large-scale space measurement



Integrated Measurement Head

Powerful CPU processing capability, compact control system are built into the laser head, and this integrated design greatly reduces the product volume and number of connection cables.



Automatic Locking

The camera will automatically search for the SMR in a certain area when the beam interrupts, and automatically lock the SMR after find it. The whole process does not require human operation.



HiADM

Absolute Distance Meter(ADM) and laser interferometer(IFM) fusion technology (HiADM) ensures excellent measurement accuracy and realizes Re-establish Beam Interruptions.



Integrated Environmental Weather Station

The integrated environmental weather station automatically monitors the environmental meteorological parameters, and compensates the influence of temperature, air pressure and humidity in real time.



MultiComm Communication

The instrument and computer can communicate with each other through hardware trigger, wired network or WIFI. The max measurement data output speed is 1000 points/second.



Portable

The laser head and accessories are packed well in portable boxes, making it easy to transport between different work sites.



IP54 Protection

IP54 protection level ensures that the host is protected from dust and other pollutants, and has strong environmental applicability.



Steady Tripod

The stable triangular support system avoids the loss of accuracy caused by environmental vibrations.

6D Attitude Probe iProbe

- Machine vision spatial attitude measurement
- It can measure the geometric structure of internal features and hidden features
- Thanks to dual probe design, it is efficient to measure complex features
- Wireless transmission

6D Attitude Smart Sensor iTracker

- The attitude sensor automatically follows and locks the laser beam, which has high measurement flexibility
- The pitch angle and yaw angle are not limited by the receiving angle of the optical receiver
- Simple interface connection, easy to install on machine tools or robots, high repeatability and precision
- Dedicated band laser beam and filter design, not sensitive to ambient light
- The highest sampling speed is 100 points/second



Application



Airplane Assembly



Train Assembly



Nuclear Generator Assembly



Vessel Assembly



Wind-Driven Generator Assembly



Rocket Assembly



Hydroelectric Generator Assembly



Robot Arm Calibration



TBM Assembly



Car Assembly




Large Weapon Assembly




Large Machine tool Calibration

Spatial Measurement Software SpatialMaster

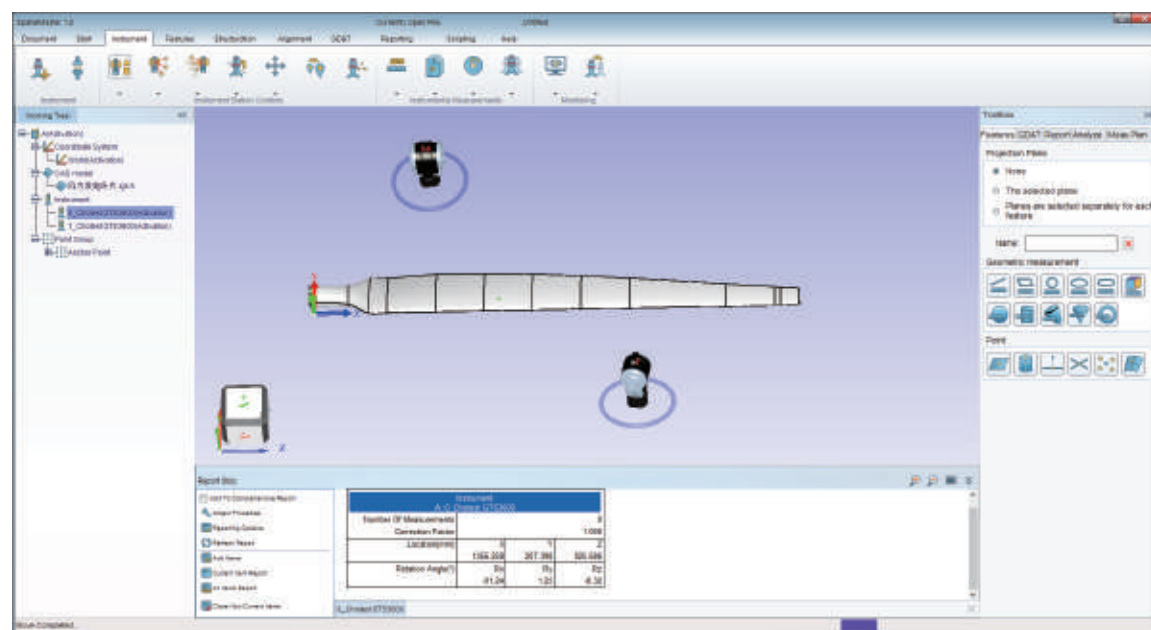

- Traceability, faithfully record the measurement information of all measurement points of all instruments.
- Rich geometry construction methods and accurate fitting algorithms, certified by Gauss and Chebyshev double PTB.
- Multiple registration and alignment methods such as optimal fitting, sequential registration, and comprehensive alignment.
- Provides powerful analysis functions, geometric relationship measurement functions, including professional GD & T evaluation.
- The convenient monitoring function can provide efficient assembly and adjustment services for the actual production assembly process.
- Self-controllable, visible and available report format, meeting various report format requirements.
- Automatic measurement, In-line measurement, Guide point measurement, Batch point measurement functions improve measurement efficiency.
- Support multi-station simultaneous measurement, and can carry out unified spatial measurement and analysis of multi-tracker multilateral method.
- Provide SDK interface, support user independent programming.

Robot Calibration Software RobotMaster

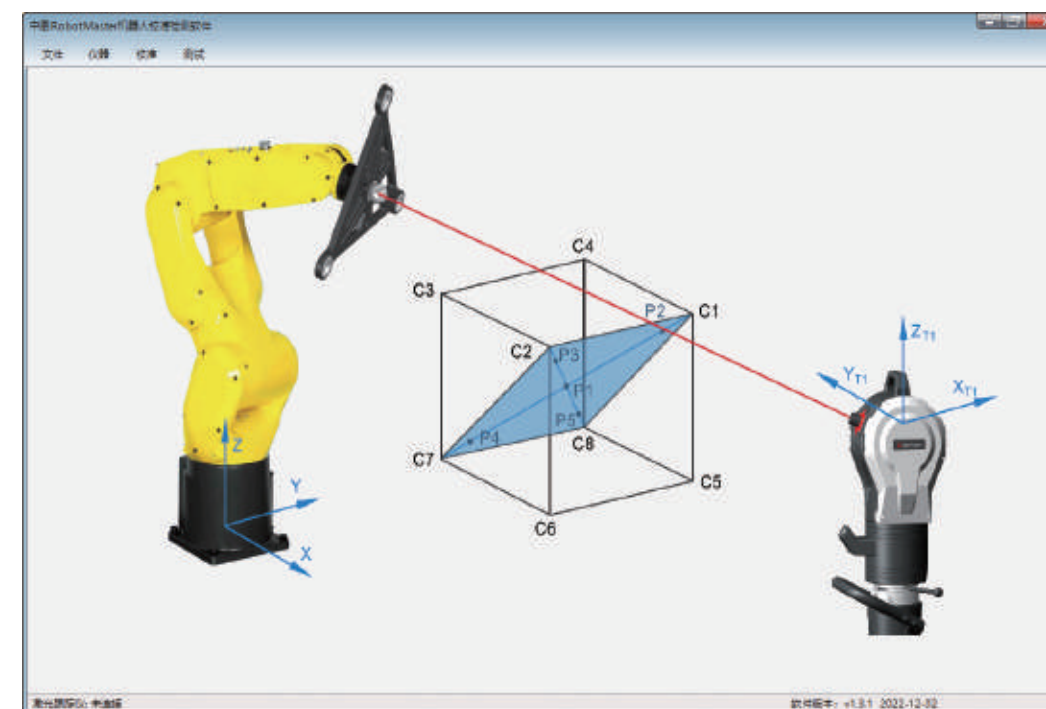

RobotMaster Software

The RobotMaster kit provides an absolute position accuracy calibration and performance test for industrial robots. RobotMaster supports not only enhanced solutions based on 6D attitude smart sensors, but also supports economic solutions based on SMR.

Robot Calibration Software

According to the DH parameters of the robot, the robot calibration mathematical model is established, and the robot zero position calibration, the robot DH parameter calibration, and the robot TCP center point accuracy calibration are performed. Without changing any structure and hardware size of the existing robot, the absolute pose accuracy of the robot can be effectively improved through the robot calibration software.

Robot performance testing software

According to the ISO 9283 industrial robot performance specification and its experimental method, the robot performance test is completed. The test content includes: robot pose accuracy, pose repeatability, multi-directional pose accuracy change, distance accuracy, distance repeatability, position stabilization time, position overshoot, pose characteristic drift, interchangeability, trajectory accuracy, trajectory repeatability, corner deviation, trajectory velocity characteristics, static compliance, etc.

GTS3000 Series Parameters

Model No.		GTS3300	GTS3600	GTS3800
Basic Spec.	Head Size	229×256×481mm		
	Head Weight	17Kg		
	Controller	Integrated		
	Laser Generator*1	633nm, 1mW/CW Class 1		
	Support 6D	No		
	Protection Level	IP54		
Measuring Range	Max Distance(Radius)	30m	60m	80m
	Horizontal	±360°	±360°	±360°
	Vertical	-145°~+145°	-145°~+145°	-145°~+145°
Accuracy*2	Spatial Accuracy	15μm+6μm/m	15μm+6μm/m	15μm+6μm/m
	IFM Accuracy	0.5μm/m	0.5μm/m	0.5μm/m
	ADM Accuracy	10μm(Entire range)	10μm(Entire range)	10μm(Entire range)
	Level Accuracy	2.0"(Optional 1.0")	2.0"(Optional 1.0")	2.0"(Optional 1.0")
Data Output Rate		1000 points/sec.	1000 points/sec.	1000 points/sec.
Communication	Cable Connection	TCP/IP(Cat5)		
	Wireless Connection	WLAN(IEEE 802.11N)		
Working Environment	Operating Temperature	0°C~40°C		
	Altitude	-500~+3500m		
	Relative Humidity	0~95%, no condensation		
Power Supply		AC100~240V, 50/60Hz, 4A, 220W		

Note:
*1 According to IEC60825-1(2014-5), it meets the radiation performance standard.
*2 The accuracy index is the maximum permissible error (MPE), using the standard 1.5" SMR, excluding the influence of air temperature variations.

Parameters of 6D Attitude Sensor

6D Attitude Sensor iTracker		
Measuring Range	Max Range(Radius)	15m
	Pitch	±45°
	Yaw	±180°
	Roll	±360°
Basic Spec.	Weight	2.16kg
	Size	136×108×246mm
Accuracy	Attitude Angular Accuracy	0.02°
	Repeatability	0.005°
Transmission	Max Transmission Speed	100Hz
	Connection Type	Cable
Power Supply		From laser tracker

GTS6000 Series Parameters

Model No.		GTS6300	GTS6600	GTS6800
Basic Spec.	Head Size	229×256×481mm		
	Head Weight	16.8Kg		
	Controller	Integrated		
	Laser Generator*1	633nm, 1mW/CW Class 1		
	Support 6D	Yes		
	Protection Level	IP54		
Measuring Range	Max Distance(Radius)	30m	60m	80m
	Horizontal	±360°	±360°	±360°
	Vertical	-145°~+145°	-145°~+145°	-145°~+145°
Accuracy*2	Spatial Accuracy	15μm+6μm/m	15μm+6μm/m	15μm+6μm/m
	IFM Accuracy	0.5μm/m	0.5μm/m	0.5μm/m
	ADM Accuracy	10μm(Entire range)	10μm(Entire range)	10μm(Entire range)
	Level Accuracy	1.0"	1.0"	1.0"
Data Output Rate		1000 points/sec.	1000 points/sec.	1000 points/sec.
Communication	Cable Connection	TCP/IP(Cat5)		
	Wireless Connection	WLAN(IEEE 802.11N)		
Working Environment	Operating Temperature	0°C~40°C		
	Altitude	-500~+3500m		
	Relative Humidity	0~95%, no-condensation		
Power Supply		AC100~240V, 50/60Hz, 4A, 220W		

Note:
*1 According to IEC60825-1(2014-5), it meets the radiation performance standard.
*2 The accuracy index is the maximum permissible error (MPE), using the standard 1.5" SMR, excluding the influence of air temperature variations.

Parameters of 6D Attitude Probe

6D Attitude Probe iProbe		
Measuring Range	Max Range(Radius)	15m
	Pitch	±45°
	Yaw	±45°
	Roll	0°~360°
Basic Spec.*1	Weight/Size	0.62kg, 222×128×122mm
Accuracy*2	Probe Accuracy	35μm
	Spatial Accuracy	50μm+6μm/m
Measuring Rod	Ball Diameter	3mm, 6mm
	Rod Length	40mm, 100mm, 200mm, 400mm
Transmission	Max Transmission Speed	200Hz
	Connection Type	IR
Power Supply	Type	Li-ion battery
	Working Duration	≥8 hours

Note:
*1 Does not include measuring stylus.
*2 Uses 100mm measuring rod.

Laser Interferometer SJ6000


Calibration of Guide Rail



Functions

1. Calibrate motion accuracy of guide rail quickly and accurately.
2. Measure and analyze many kinds of dynamic parameters, such as displacement, velocity, acceleration and amplitude frequency.
3. Built-in variety of general standards of machine tools.

Application

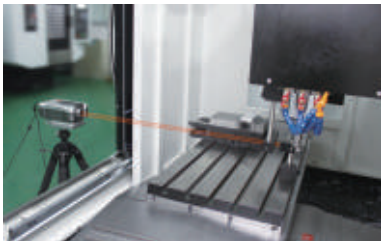

Linear meas. of machine tool



Linear meas. of stage module




Lab length reference



Linear meas. of machine tool




Angle meas. of stage module

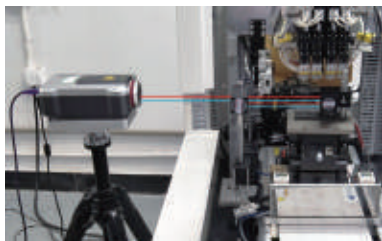


Angle meas. of DC motor



Parallelism meas. of two guide rails

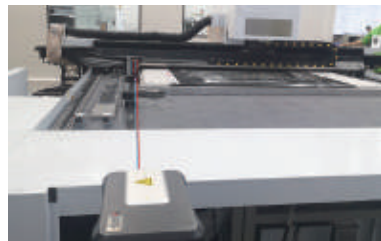


Straightness meas. of equipment

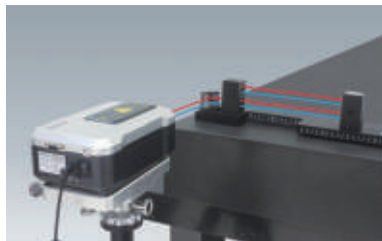

Flatness meas. of Granite table



Squareness meas. of CMM

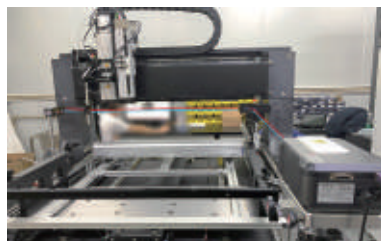


Perpendicularity meas. of equipment



Twin guide rails meas. of equipment


Prism Modules

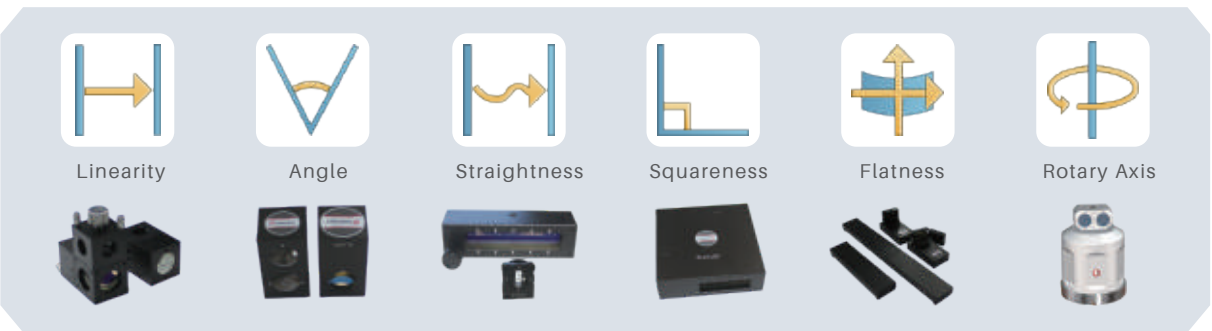

Laser interferometer is recognized as a high precision, high sensitive measuring method by applying light wavelength as criterion, and is widely used in high-end manufacturing industries.

Laser interferometer SJ6000 insists of high-frequency Helium-Neon laser generator from an USA supplier, high-precision environmental compensation modules, high-precision laser interference signal processing system, high-performance computer control system. By applying with thermal frequency stabilization technology of laser dual-longitudinal mode and geometric parameters interference optical path design, SJ6000 can output long-term stable and high-precision (0.05ppm) laser quickly (about 6 minutes) which has powerful anti-interference performance. With different prism modules, it can measure linearity, angle, straightness, flatness and perpendicularity, besides it can also analyze dynamic characteristics.

Software

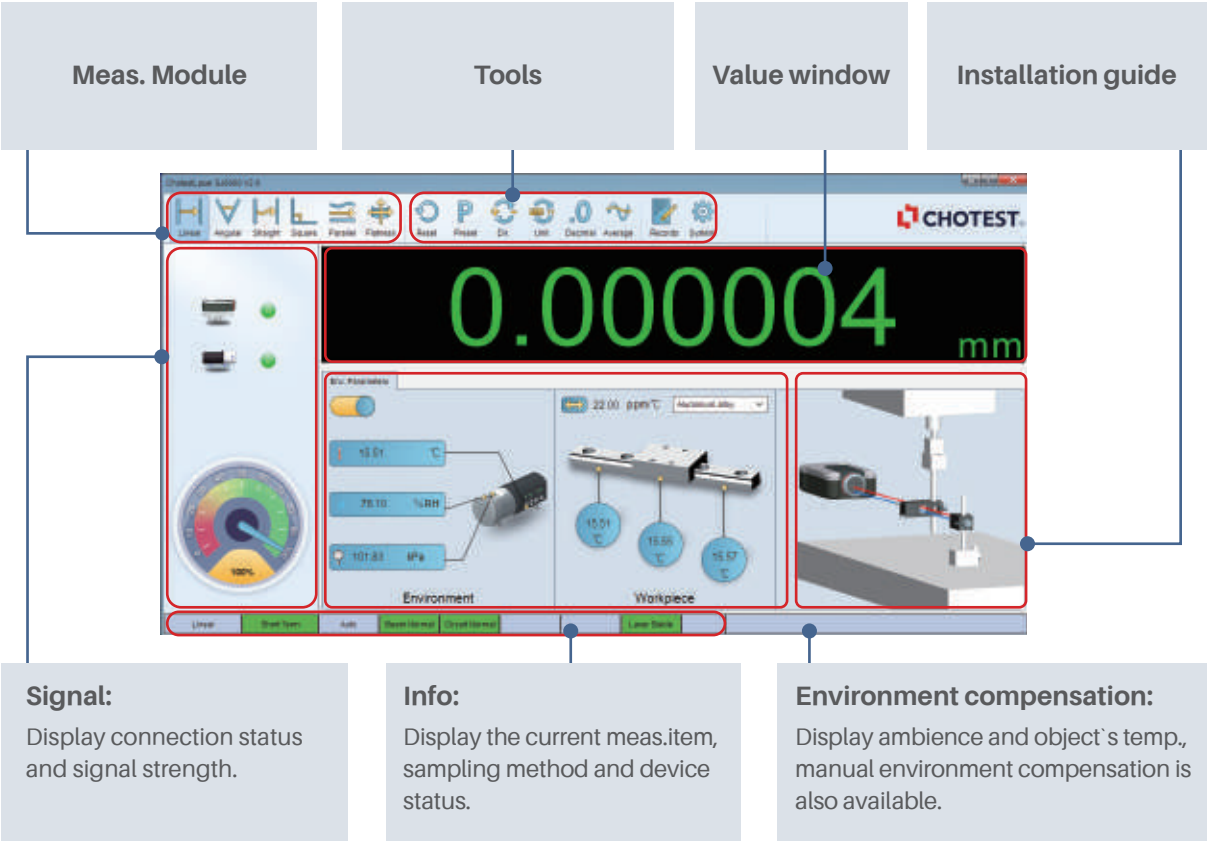

Dynamic Measurement Application

Time based

Motion performance evaluation

- * Control parameter test and setting of motion controller PID.
- * Stability test and evaluation after high-speed motion.
- * Small steps test of high-performance motion controller.

Vibration monitoring

- * Scanning application:
Applied for the situation when positioning accuracy is not important but constant speed is critical for high quality imaging.
- * Machine tool applications:
Applied for the situation when slow and smooth contour movement of cutting tool is critical for high quality machining.

Vibration frequency analysis

- * Vibration frequency analysis of the measured object
- * FFT fast Fourier transform analysis

Distance based

In distance-based dynamic measurement, laser interferometer SJ6000 "flies" along the axis, that means SJ6000 samples data at designated points without stopping.

Pulse Trigger Mode

Pulse trigger CT70 is compatible with glass scales, encoders and controllers. Equipped with Pulse trigger CT70, laser interferometer SJ6000 can sample data in pulse trigger mode. Even if the axis does not stop, laser interferometer SJ6000 could sample data at designated points or continuously sample data.




Pulse trigger CT70

Parameters

System parameters:				
1. Measuring method: single frequency				
2. Laser frequency accuracy: 0.05ppm				
3. Dynamic capture rate: 50kHz				
4. Warm-up time: about 6 min				
5. Operating temperature: (0~40)°C				
6. Environment temperature: (0~40)°C, humidity: 0-95%				
7. Storage temperature: -20°C~70°C				
Environmental sensors:				
1. Atmospheric temperature sensor : ±0.1°C(0~40)°C, resolution: 0.01°C				
2. Material temperature sensor: ±0.1°C (0~55)°C, resolution: 0.01°C				
3. Atmospheric humidity sensor: ±6%RH (0~95%)				
4. Atmospheric pressure sensor: ±0.1kPa (65~115)kPa				
Linear measurement:				
1. Measuring range: (0~80)m				
2. Measuring accuracy: 0.5ppm (0~40)°C				
3. Measuring resolution: 1nm				
4. Maximum measuring speed: 4m/s				
Angle measurement:				
1. Axial range: (0~15)m				
2. Measuring range: ±10°				
3. Measuring accuracy: ±(0.02%R+0.1+0.24M)" (R is indicating value, unit: "; M is measured length in meters)				
4. Measuring resolution: 0.01"				
Flatness measurement:				
1. Axial range: (0~15) m				
2. Flatness measuring range: ±1.5 mm				
3. Measuring accuracy: ±(0.2%R+0.02M ²) um (R is indicating value in um; M is measured length in meters)				
4. Substrate size: 180mm adjustable, 360mm adjustable				
5. Measuring resolution: 0.1 um				
Straightness measurement:				
Item	Axis range	Measuring range	Accuracy	Resolution
Short straightness	(0.1~4)m	±3.0mm	±(0.5+0.25%R+0.15M ²)μm	0.01μm
Long straightness	(1~20)m	±3.0mm	±(5.0+2.5%R+0.015M ²)μm	0.1μm
Note: R is indicating value in um; M is measured length in meters				
Squareness measurement:				
Item	Axis range	Measuring range	Accuracy	Resolution
Short straightness	(0.1~3)m	±3/M mm/m	±(2.5+0.25%R+0.8M)μm/m	0.01μm/m
Long straightness	(1~15)m	±3/M mm/m	±(2.5+2.5%R+0.08M)μm/m	0.01μm/m
Note: R is indicating value in um; M is measured length in meters				
Rotary axis measurement:				
1. Measuring range of angle: 0~360°				
2. Max axis rotation speed: No limit(<5°), 10rpm(>5°)				
3. Pitch accuracy of precision turntable: ±1"				
4. Resolution : 0.01"				

Rotary Axis Calibrator WR 50

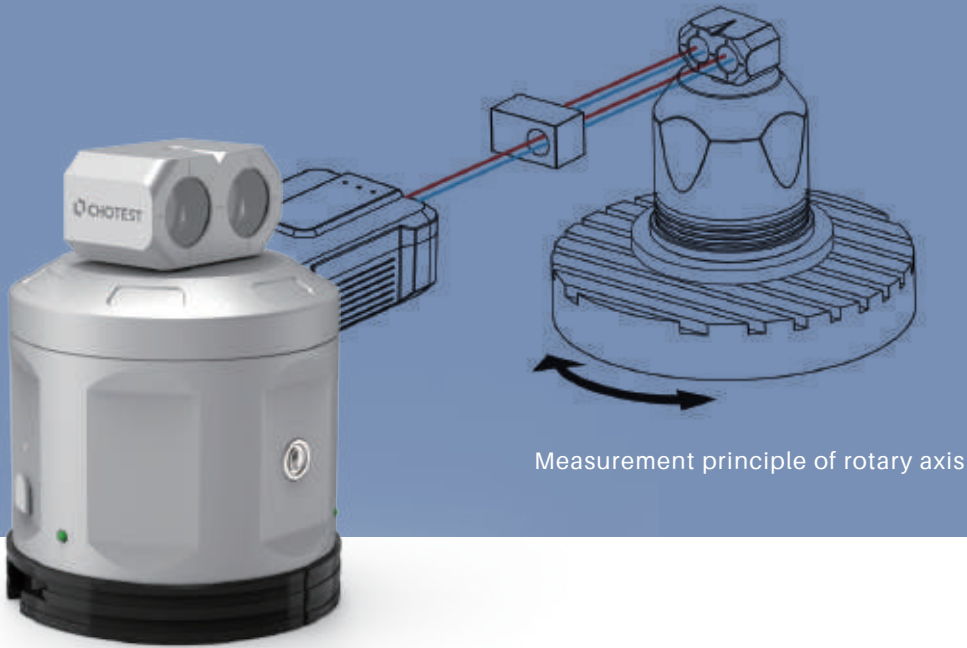

Measurement principle of rotary axis

Measurement Principle

Equipped with Rotary axis calibrator WR50 and Angle prism, Laser interferometer SJ6000 is capable to calibrate rotary axis 0~360°. Rotary axis calibrator WR50 is intalled to the rotary axis as an angle master.

Parameters

Model No.	WR50	Weight	1.9kg
Measuring Range	(0~360)°	Height	148mm
Measuring Accuracy	±1"	Diameter	112mm
Resolution	0.01"	Communication Type	Bluetooth
Max Axis Rotation Speed	10rpm	Power Supply	Li-battery
Max Tracking Speed	2rpm		

Application




Rotary axis measurement of CNC



Electric spindle measurement of CNC



Swing axis measurement of CNC

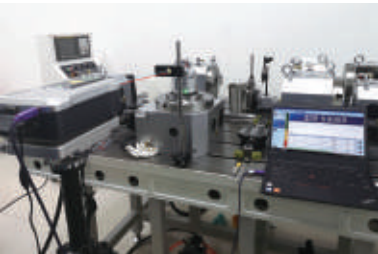

Angle measurement of CNC index plate




Angle measurement of turntable



Angle measurement of CNC turntable

Software

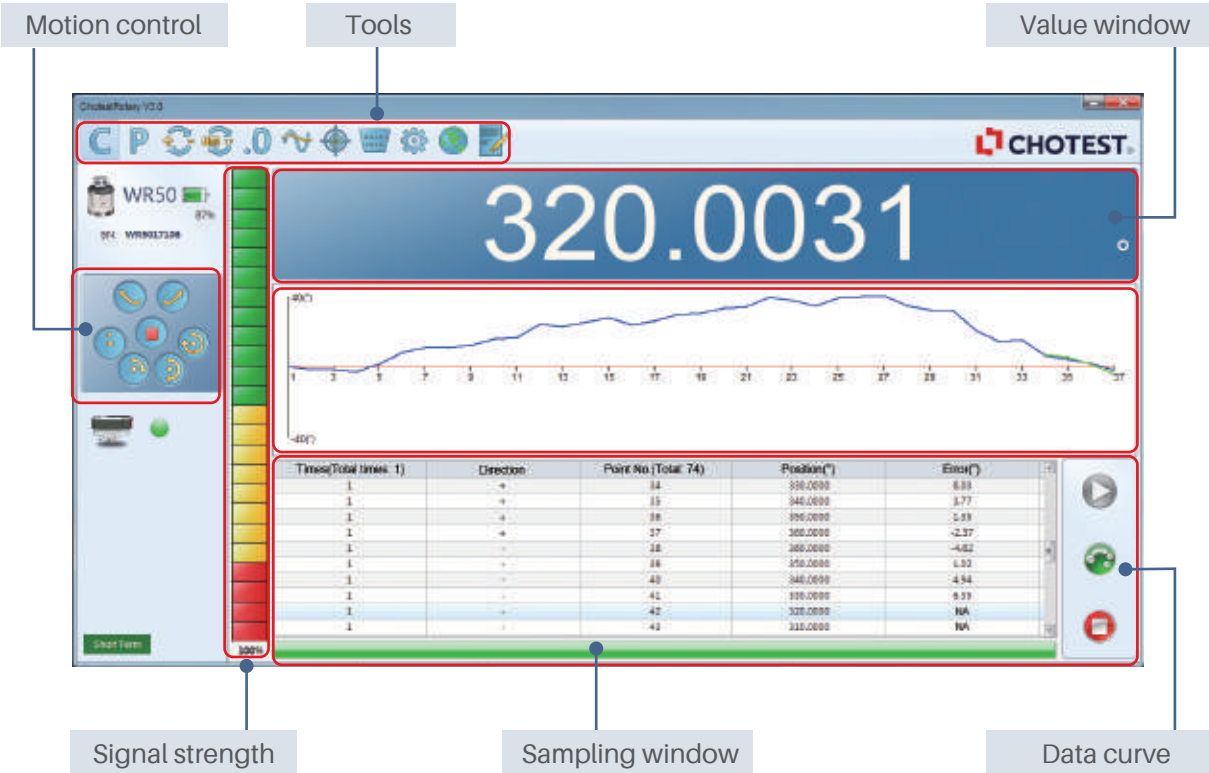


Eccentric Axis Measurement

Equipped with angle prism, precision turntable WR50, dedicated jig and dedicated software, SJ6000 is capable to calibrate eccentric axis rotation accuracy.


Eccentric axis meas. kit:

- 1.Magnet, 3pcs
- 2.90° Jig
- 3.Dedicated software

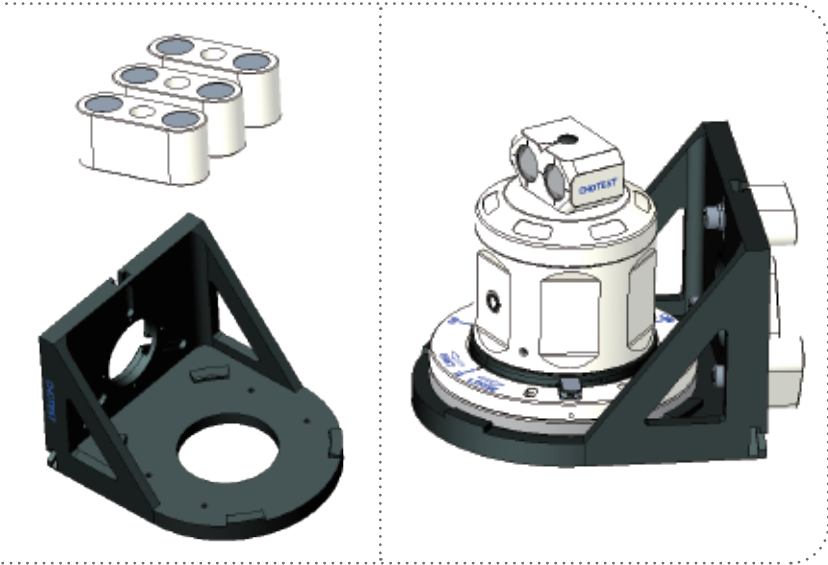


Measurement Principle

The measurement principle is to use the synchronous movement of the object table and the main spindle, as shown in the figure below. It is important to make sure that angle prism should be always aligned with WR50.

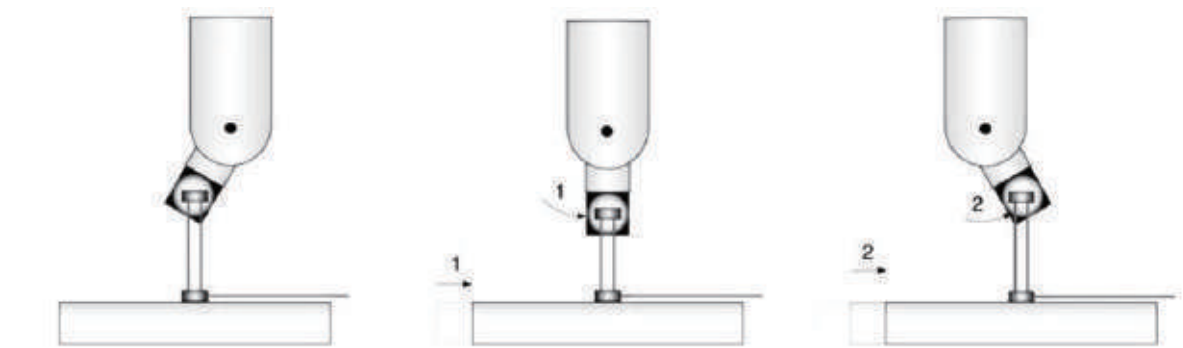

Software Settings

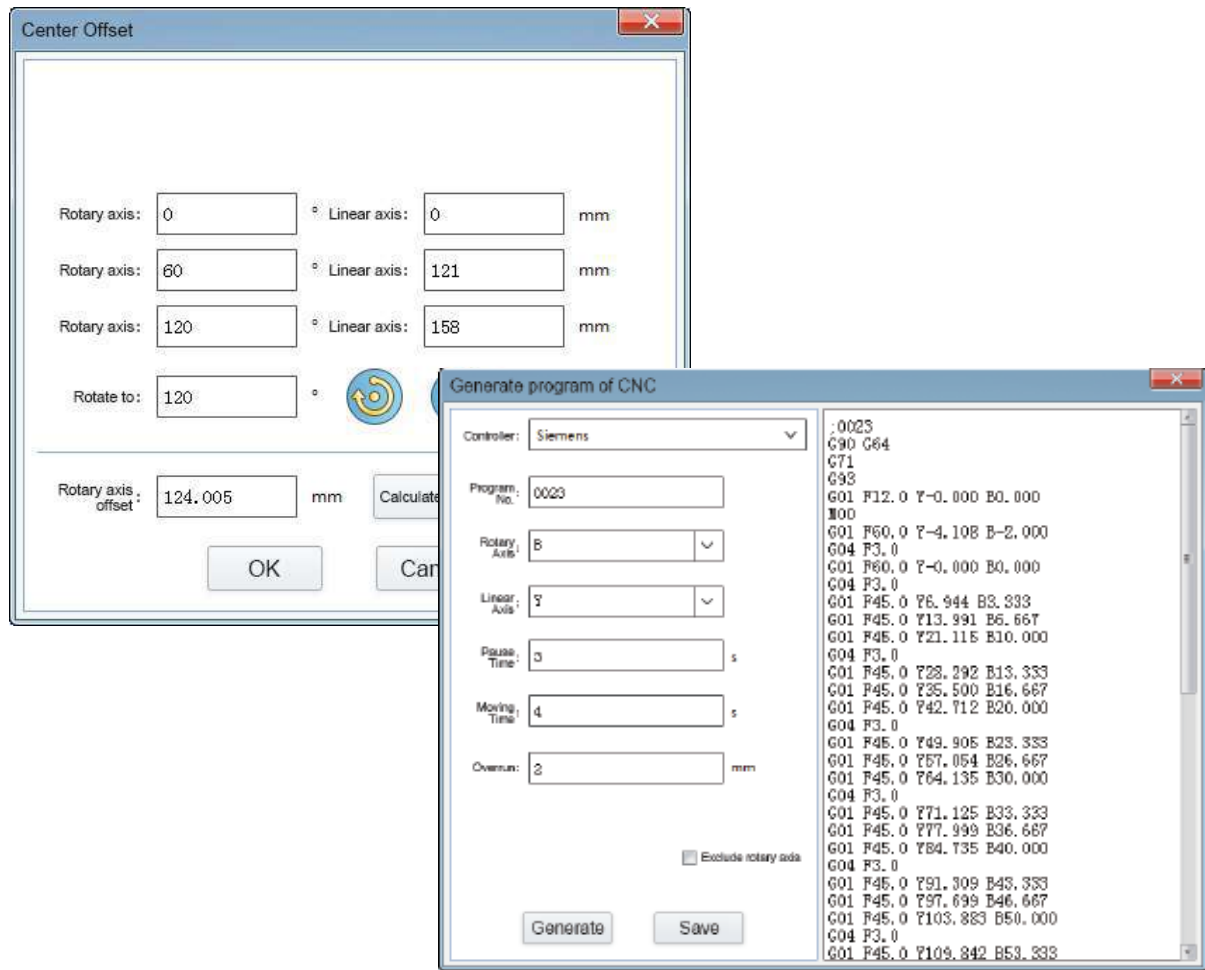

Application



Eccentric axis measurement

Wireless Ballbar MT21

Fast Diagnosis for Machine Tools

MT21 Wireless Ballbar is a simple, fast, economical and efficient solution to diagnose performance of machine tools, and helps to improve the machining quality of machine tools.



Feature

Simple, Fast

The measurement software with guided operation can generate the machine running program automatically. With simple setting, the round track test on three orthogonal planes can be completed in 10~15 minutes.

Powerful Function


Comprehensive diagnosis report provides a full and professional assessment of machine performance. Taking 360 degree measurement at the XY plane as an example, it can analyze: backlash X, backlash Y, reverse jump X, reverse jump Y, lateral gap X, lateral gap Y, period error X, period error Y, servo Mismatch, perpendicularity, straightness X, straightness Y, proportional mismatch, scale error X, scale error Y, thread pitch X, thread pitch Y, feed rate, center offset X, center offset Y, position tolerance, the best fitting radius, roundness.

Wireless

Data is transmitted to the laptop computer via Bluetooth in real time.

Software

MT21 software with guided operation can implement the round track test on three orthogonal planes quickly and simply. After measurement, software calculates the overall measurement values (roundness, roundness deviation) of the positional accuracy automatically, then generates the analysis report with the graphic format according to GB17421-4, ISO230-4. MT21 achieves the real spatial diagnosis for machine tools.

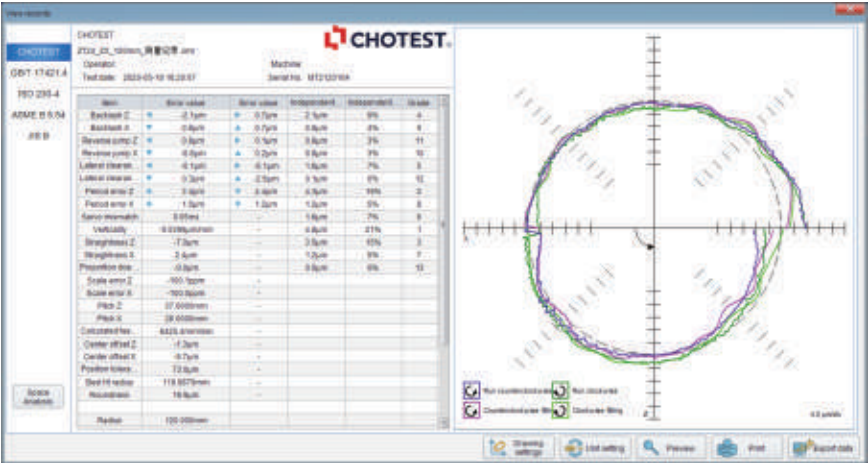

Error Analysis Report

Parameters

Communication: Bluetooth(Typical 10m)
Power Supply: Li-battery
Resolution: 0.1μm
Measuring Accuracy: ±(0.7+0.3%L)μm
Measuring Range: ±1.0mm
Sensor Range: ±2.0mm
Sample Rate: 1000Hz
Working Temperature: (0~40)°C
Size: 120×26×21mm


Configuration

1. MT21 Wireless Ballbar	1pc
2. Master gauge	1pc
3. Offset setting ball	1pc
4. Centric holder	1pc
5. Tool cup	1pc
6. Extension bar 50, 100, 150mm	1pc of each
7. Software	
8. Portable suitcase	
9. User Manual	

Application



Roundness inspection of machine tools

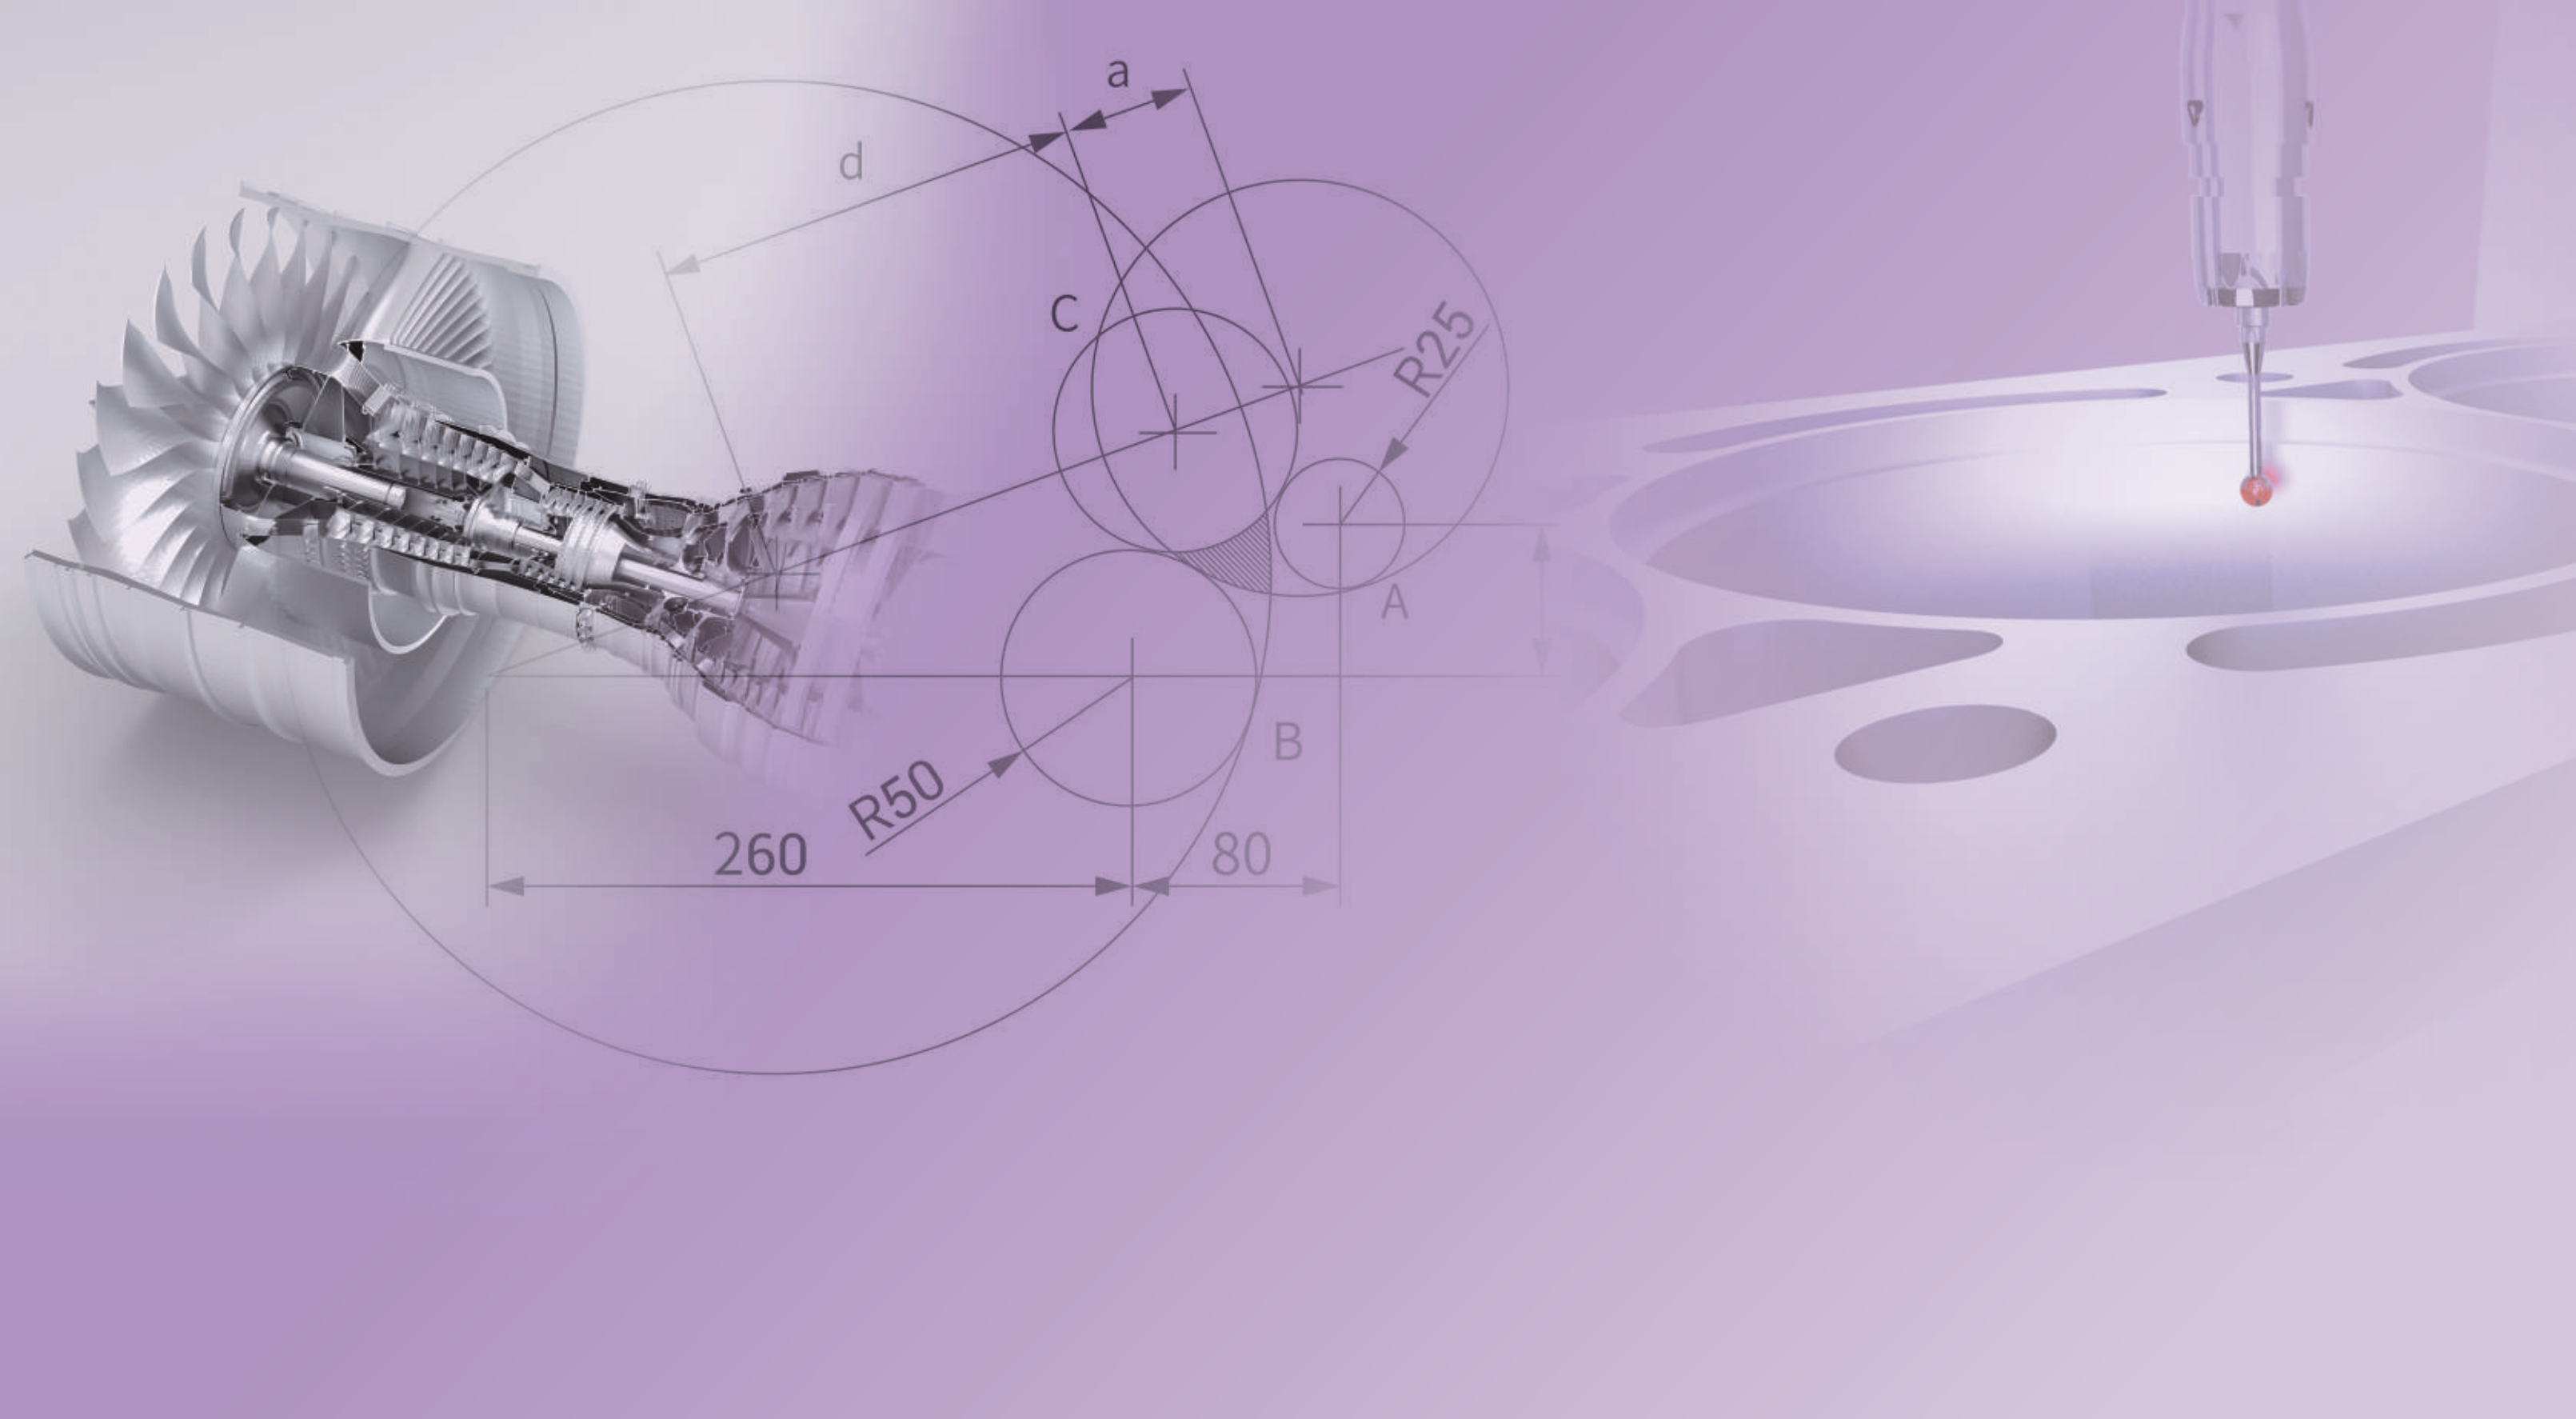

Contact Measurement Instruments



Coordinate Measuring Machine(CMM)

Chotest designs and produces high-performance CMM supporting touch-triggering, scanning, and non-contact probing systems. They precisely inspect dimensions, shapes, and GD&T of various components, and perform optical scanning on soft materials or complex parts.

Supports measurement software (PowerDMIS, RationalDMIS, ARCOCAD), controllers (Alpha series, Pantec, Renishaw UCC), and accessories (stylus change rack, vision cameras, precision rotary tables).

Chotest CMM are essential for machinery manufacturing, automotive, electronics, aerospace, defense, and metrology industries, serving as indispensable equipment for modern inspection and quality control.


Industry Applications



Machinery Manufacturing



Automotive Industry



New Energy Industry



3C Electronics



Mold Inspection



Injection Molding



Hardware Components



Medical Devices

Main Features

- Patented exterior design enhances machine stability
- Air Pressure Safety Device prevents Z-axis from falling, ensuring probe safety
- All three axes use granite guide rails with low thermal expansion coefficients, providing excellent temperature adaptability and resistance to aging deformation
- The fixed workbench provides strong load-bearing capacity and a spacious, convenient loading and unloading area
- Thanks to integral cast of key components, the machine structure is compact & light weight & high strength, enabling fast and stable movement with high measurement accuracy
- High-resolution metal grating scales ensure extremely high accuracy and long-term stability during machine operation
- Z-Axis Flexible Balancing System provides optimal frictional resistance during movement, improving Z-axis moving accuracy.
- Enclosed Air Bearing maintains long-term stable operation with high motion quality.



ACH100T / ACH100T-5 Automatic Rotary Probe Head

The ACH100T series is a fully automatic rotary probe head independently developed by Chotest. It enables movement in increments of 7.5 or 5 degrees on the A and B axes, providing 720 or 1728 repeatable spatial positions. It can be configured with extension rods up to 300mm long.

- The probe head achieves A-axis range: 0-105° (or 0-115°) and B-axis range: -180°~+180°.
- The probe head uses precision multi-point positioning to achieve high positioning accuracy.
- Key components use composite materials and high-strength materials.
- Dynamic and static anti-collision design ensures safety during operation.

Model No.		ACH100T	ACH100T-5
Weight		700g	800g
Probe Mounting		M8	M8
Repeatability (2σ) (Distance 100mm from A-axis center)		0.4μm	0.4μm
Number of Positions		720	1728
Indexing Angle		7.5°	5°
Moving Time	7.5°/5°	2.5S	2.5S
	90°	3.5S	3.5S
Moving range	A-axis	0-105°	0-115°
	B-axis	±180°	±180°
Torque		0.45Nm	0.45Nm
Max extension rod		300mm	300mm
Controller		Alpha 4	Alpha 4



Trigger Probe CP100T

The CP100T is a mechanical trigger probe independently developed by Chotest. It can trigger in 5 spatial directions, featuring high accuracy and stability.



ACH100S / ACH100S-5 Automatic Rotary Head

The ACH100S series probe head, independently developed by Chotest, connects to the CP500S scanning probe via TKJ (Scanning Kinematic Interface) to enable scanning functionality. It can also connect to CP100T series trigger probes via an adapter to enable mechanical triggering functionality.

The ACH100S series enables probe head movement in increments of 7.5 or 5 degrees on the A and B axes, providing 720 or 1728 repeatable spatial positions. The repeatability of the probe head reaches the same level of similar famous models.

- Probe head achieves A-axis range: 0-105° (or 0-115°), B-axis range: -180°~+180°.
- Probe head uses precision multi-point positioning to achieve high positioning accuracy.
- Key components use composite materials and high-strength materials.
- Dynamic and static anti-collision design ensures safe use of the probe head.

Model No.		ACH100S	ACH100S-5
Weight		710g	810g
Probe Mounting		Scanning interface	Scanning interface
Repeatability (2σ) (Distance 100mm from A-axis center)		0.4μm	0.4μm
Number of Positions		720	1728
Indexing Angle		7.5°	5°
Moving Time	7.5°/5°	2.5S	2.5S
	90°	3.5S	3.5S
Moving range	A-axis	0-105°	0-115°
	B-axis	±180°	±180°
Torque		0.45Nm	0.45Nm
Max extension rod		300mm	300mm
Controller		Alpha 4 Pro	Alpha 4 Pro




Scanning Probe CP500S

Model No.		CP500S-S	CP500S-L
Body diameter		25mm	25mm
Weight		65g	75g
Measuring range		±0.5mm	±0.5mm
Overtravel	X/Y	±2mm	±2mm
	Z	-1.2, +1.7mm	-1.2, +1.7mm
Resolution		<0.1μm	<0.1μm
Rigidity	Longest stylus	0.2N/mm	0.2N/mm
	Shortest stylus	0.6N/mm	0.6N/mm
EWL		50-120mm	120mm-230mm
Anti-collision protection		Yes	Yes
Stylus change rack		PCR500	
Controller		Alpha4 Pro	



■ Measurement Software PowerDMIS


PowerDMIS is a CMM measurement and analysis software independently developed by Chotest, which allows us flexibility for the minor software function customization.

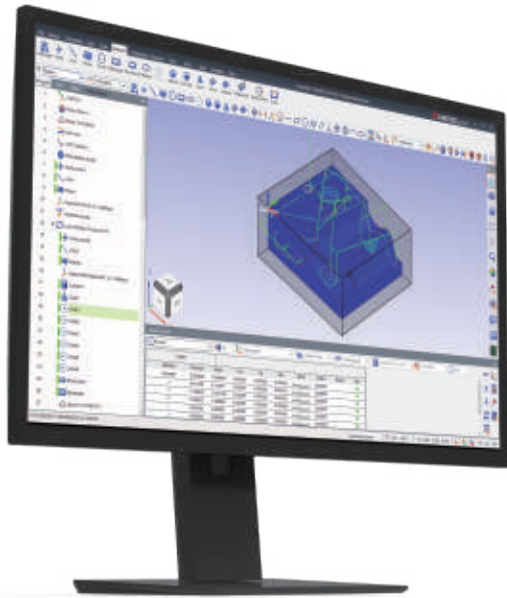

- The software supports DMIS and I++ standard protocols and has been certified for Least Squares and Minimum Zone methods by Germany PTB.

- Simple, friendly software interface. Functional modules are easy to identify and understand, allowing users to get started quickly.
- Machine library, probe system, I++ plugin, DMIS conversion functions greatly enhance software compatibility and adaptability
- Parametric view interaction and outline program mode eliminate lengthy DMIS code display, significantly reducing user programming skill requirements.
- Provides multiple measurement and construction methods. Users can configure as needed, expanding measurement application scenarios.
- Provides collision check and intuitive visualization of probe motion paths, ensuring safe and efficient measurement.
- Software offers diverse data management functions. Or export measurement data to customer`s MES.

■ At Customer sites

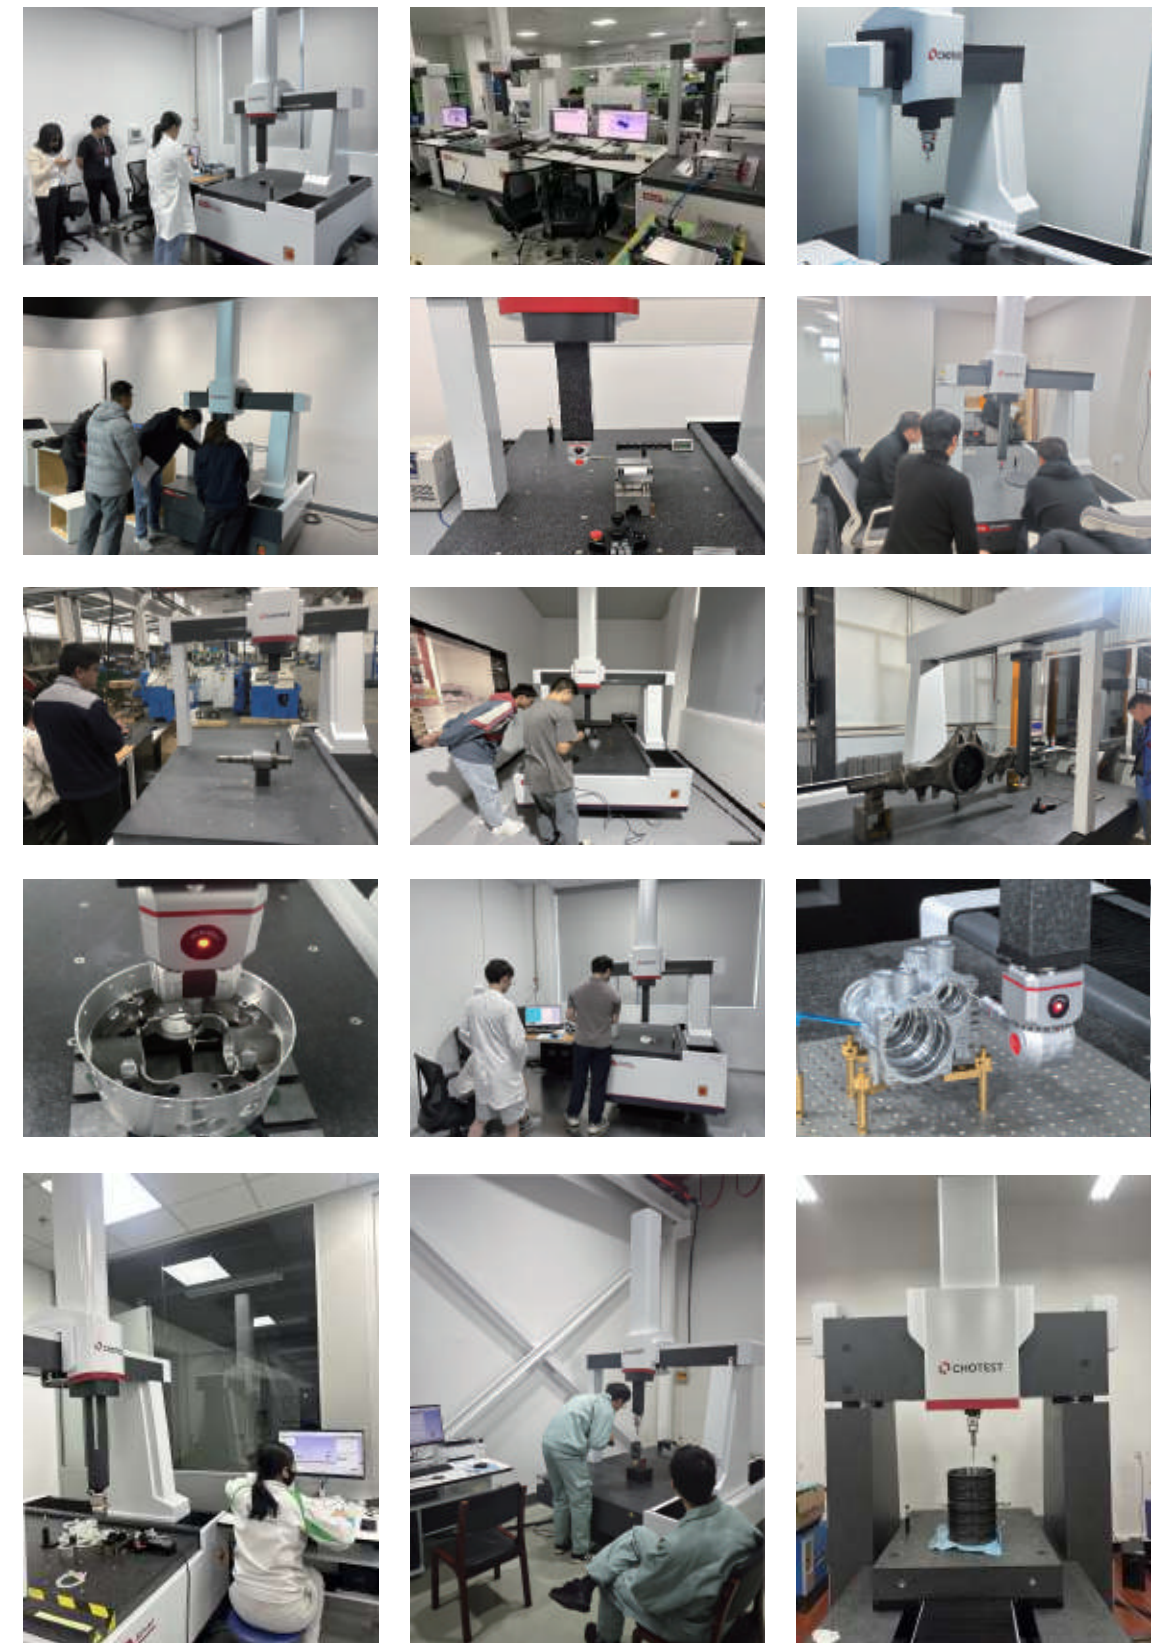


Mizar Silver

Small Moving-Bridge CMM



Note:
Electrical equipment shall have reliable grounding: the grounding resistance shall be less than 4 ohms.
Methods for meeting environmental requirements can be found in the Machine Room Construction Guide.

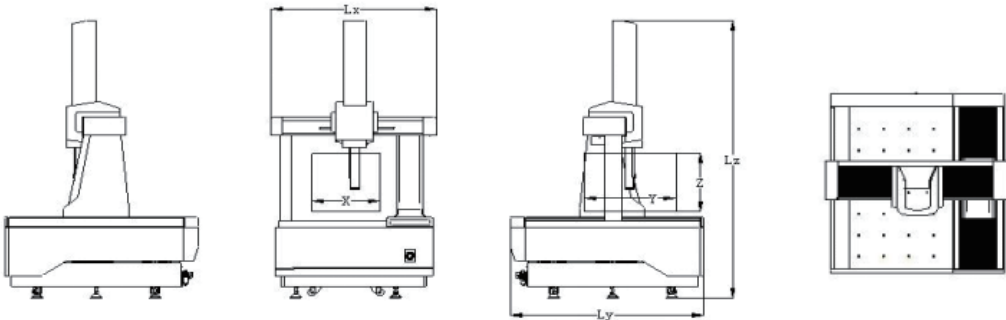


Technical Parameters


Model	Travel Range(mm)			Size(mm)			Weight (kg)	Load Capacity (kg)	Accuracy	
	X	Y	Z	LX	LY	LZ			MPEE(um)	MPEP(um)
Mizar Silver 575	500	700	500	1190	1505	2578	1100	600	(1.5~1.9)+L/300	1.5~2.1
Mizar Silver 686	600	800	600	1290	1655	2778	1300	600	(1.5~1.9)+L/300	1.5~2.1
Mizar Silver 7106	700	1000	600	1390	1885	2778	1500	800	(1.5~1.9)+L/300	1.5~2.1
Mizar Silver 8106	800	1000	600	1621	1990	2822	2200	1000	(1.7~2.2)+L/300	1.7~2.3
Mizar Silver 8126	800	1200	600	1621	2190	2822	2500	1100	(1.7~2.2)+L/300	1.7~2.3
Mizar Silver 8156	800	1500	600	1621	2390	2822	2700	1200	(1.7~2.2)+L/300	1.7~2.3
Mizar Silver 10128	1000	1200	800	1821	2286	3022	3000	1200	(1.9~2.3)+L/300	1.9~2.5
Mizar Silver 10158	1000	1500	800	1821	2586	3012	3200	1500	(1.9~2.3)+L/300	1.9~2.5
Mizar Silver 10208	1000	2000	800	1821	3086	3042	4200	2000	(1.9~2.3)+L/300	1.9~2.5
Mizar Silver 10308	1000	3000	800	1821	4086	3042	5500	2000	(1.9~2.3)+L/300	1.9~2.5

Mizar Silver

Large Moving-Bridge CMM

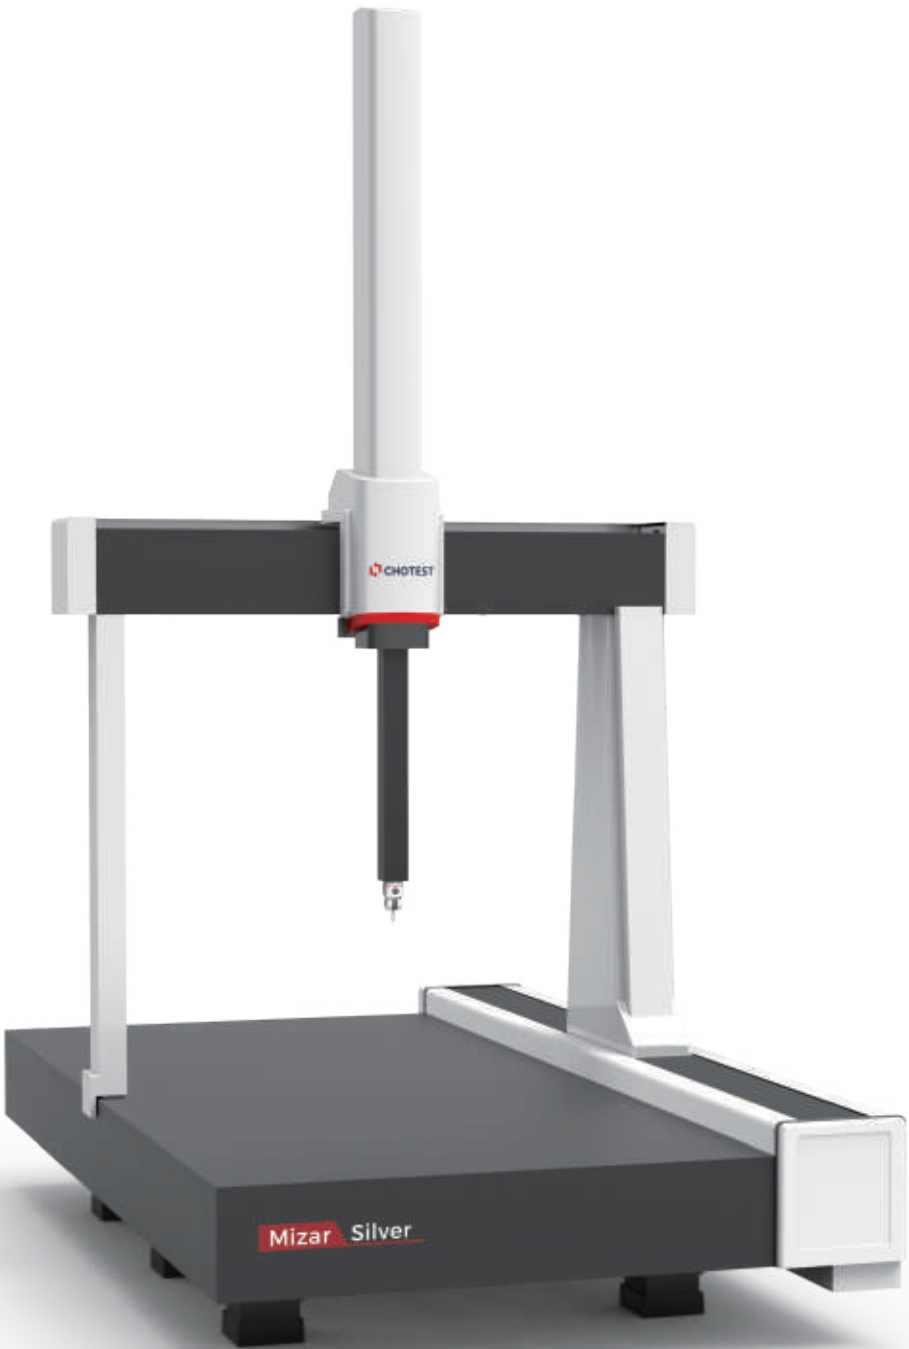

Note:
Electrical equipment shall have reliable grounding; the grounding resistance shall be less than 4 ohms.
Methods for meeting environmental requirements can be found in the Machine Room Construction Guide.

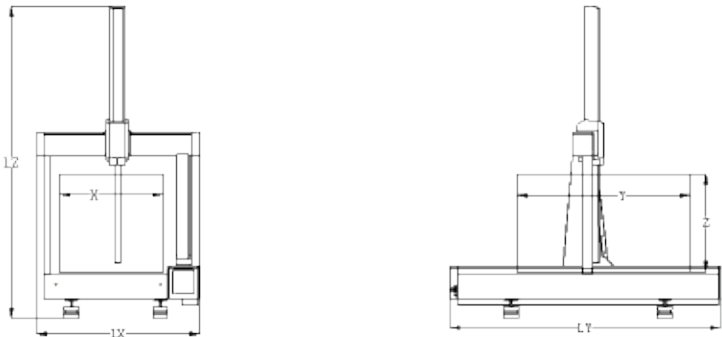

Technical Parameters


Model	Travel Range(mm)			Size(mm)			Weight(kg)	Load Capacity(kg)
	X	Y	Z	LX	LY	LZ		
Mizar Silver 121510	1200	1500	1000	2140	2883	3680	3900	1800
Mizar Silver 122210	1200	2200	1000	2140	3583	3680	4900	2300
Mizar Silver 123010	1200	3000	1000	2550	4383	3680	6000	2300
Mizar Silver 152210	1500	2200	1000	2440	3583	3680	6700	2300
Mizar Silver 153010	1500	3000	1000	2440	4383	3680	9000	2300
Mizar Silver 153012	1500	3000	1200	2440	4383	4080	9000	2300

Mars Classic

Small Moving-Bridge CMM



Note:
Electrical equipment shall have reliable grounding: the grounding resistance shall be less than 4 ohms.
Methods for meeting environmental requirements can be found in the Machine Room Construction Guide.

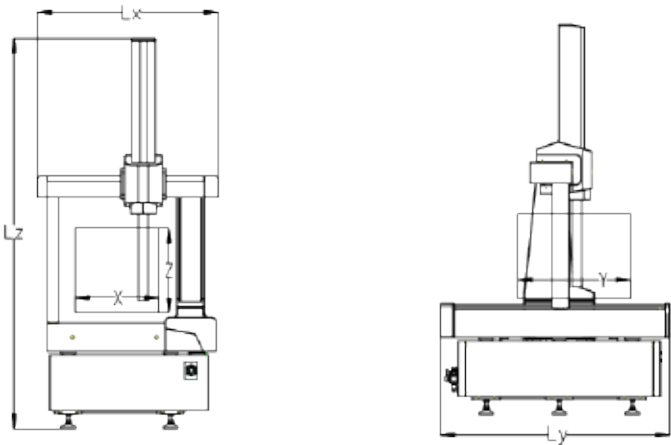

Technical Parameters


Model	Travel Range(mm)			Size(mm)			Weight (kg)	Load Capacity (kg)	Accuracy	
	X	Y	Z	LX	LY	LZ			MPEE(um)	MPEP(um)
Mars Classic 575	500	700	500	1190	1505	2578	1100	600	2.1+L/300	2.2
Mars Classic 686	600	800	600	1290	1655	2778	1300	600	2.2+L/300	2.3
Mars Classic 7106	700	1000	600	1390	1885	2778	1500	800	2.2+L/300	2.4
Mars Classic 8106	800	1000	600	1490	1855	2778	2200	1000	2.3+L/300	2.5
Mars Classic 8126	800	1200	600	1490	2055	2778	2500	1100	2.3+L/300	2.5
Mars Classic 8156	800	1500	600	1490	2425	2778	2700	1200	2.3+L/300	2.5
Mars Classic 10128	1000	1200	800	1821	2286	3022	3000	1200	2.5+L/300	2.7
Mars Classic 10158	1000	1500	800	1821	2586	3012	3200	1500	2.5+L/300	2.7
Mars Classic 10208	1000	2000	800	1821	3086	3042	4200	2000	2.5+L/300	2.7
Mars Classic 10308	1000	3000	800	1821	4086	3042	5500	2000	2.5+L/300	2.7

Mars Classic

Large Moving-Bridge CMM



Note:
Electrical equipment shall have reliable grounding: the grounding resistance shall be less than 4 ohms.
Methods for meeting environmental requirements can be found in the Machine Room Construction Guide.

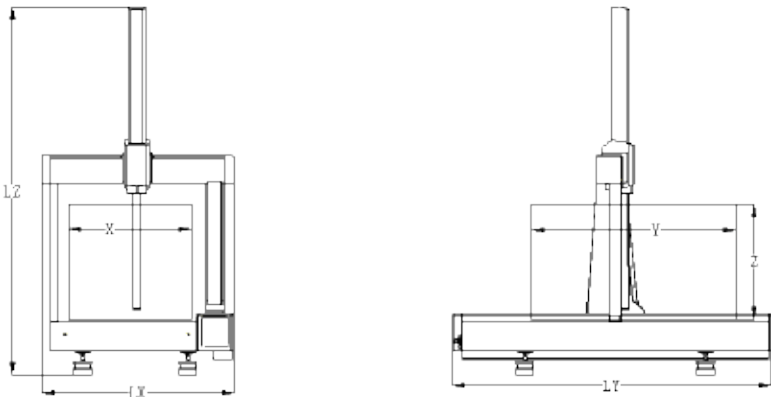

Technical Parameters

Model	Travel Range(mm)			Size(mm)			Weight (kg)	Load Capacity (kg)	Accuracy	
	X	Y	Z	LX	LY	LZ			MPEE(um)	MPEP(um)
Mars Classic 121510	1200	1500	500	1505	2883	3680	3900	1800	2.8+L/300	3.3
Mars Classic 122210	1200	2200	600	1655	3583	3680	4900	2300	2.8+L/300	3.3
Mars Classic 123010	1200	3000	600	1885	4383	3680	6000	2300	2.8+L/300	3.3
Mars Classic 152210	1500	2200	600	2190	3583	3680	6700	2300	3.3+L/300	3.8
Mars Classic 153010	1500	3000	800	2286	4383	3680	9000	2300	3.8+L/300	4.3
Mars Classic 153012	1500	3000	800	2586	4383	4080	9000	2300	3.8+L/300	4.3

Earth

Fixed-Bridge CMM



Note:
Electrical equipment shall have reliable grounding; the grounding resistance shall be less than 4 ohms.
Methods for meeting environmental requirements can be found in the Machine Room Construction Guide.

Features

- The "Enclosed Frame" and moving table design, combined with an overall granite structure, effectively eliminate the impact of temperature changes on system accuracy, ensuring long-term high precision and stability.
- X and Y axes use synchronous motors and precision ball screw drives, ensuring high acceleration and positioning accuracy.
- Preloaded air bearings with center drive ensure frictionless table movement, reducing deviation and torque.
- Y-axis frictionless double guide rails system with featuring stronger rigidity ensures motion stability.
- Multi-belt drive ensures transmission rigidity and smoothness, improving motion accuracy.
- Uses Heidenhain high-resolution grating system.
- The Air pressure detection safety device ensures that the Z-axis will not drop due to air supply failure, thus protecting the probe and head.

Technical Parameters


Model	Travel Range(mm)			Size(mm)			Weight (kg)	Load Capacity (kg)	Accuracy	
	X	Y	Z	LX	LY	LZ			MPEE(um)	MPEP(um)
Earth 686	600	800	600	1800	2280	3120	6000	300	0.7+L/400	0.7
Earth 8106	800	1000	600	2000	2480	3120	6800	500	0.9+L/400	0.9
Earth 10128	1000	1200	800	2200	2680	3320	7500	1000	0.9+L/400	0.9

SJ5780 Series Intelligent Profilometer

Multi-Sided Scanning
Dedicated for Cylindrical and Threaded workpieces



Application

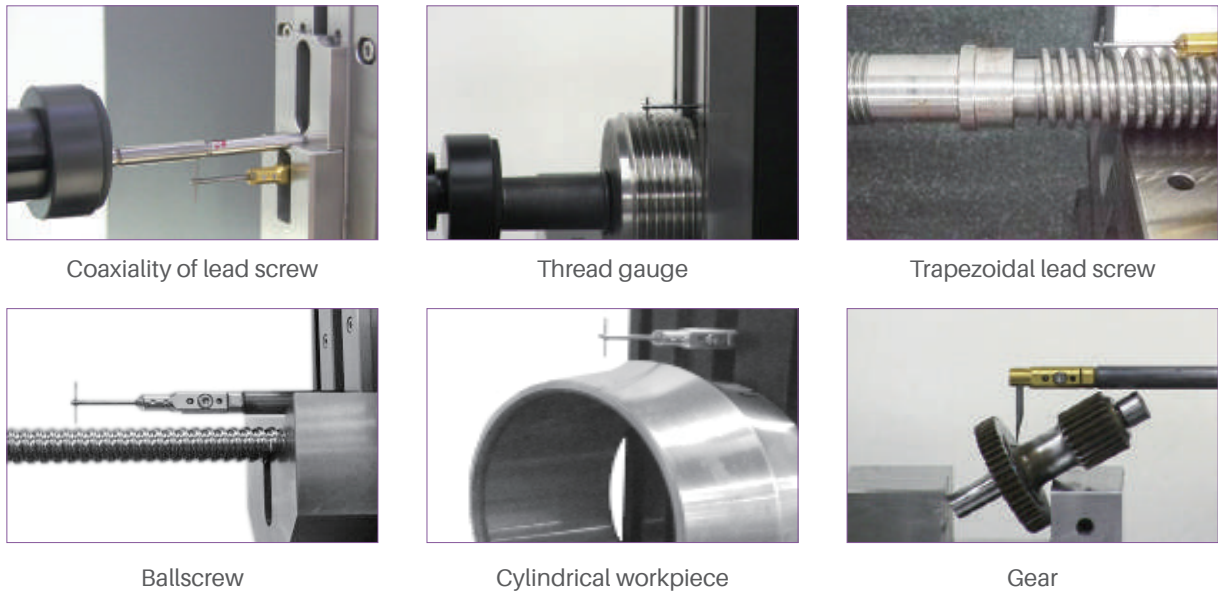

Features

1. Multi-sided profile scanning function

It obtains profile of object by scanning the surface with T-shaped stylus, then software can calculate the 2D sizes and GD & T based on the profile.

2. Thread scanning function

It can scan ordinary thread ring/plug gauges, tapered thread ring/plug gauges, plain ring/plug gauges, trapezoidal thread, sawtooth thread, multi-head threaded workpieces, lead screws, etc. Then the software can analyze their comprehensive parameters such as internal and external diameter, profile parameters, etc.

Parameters

Model No.			SJ5780-200	SJ5780-300	SJ5780-400
Basic Spec.	Measuring Range	X	0~235mm	0~325mm	0~400mm
		Z	0~235mm	0~325mm	0~400mm
	Min Resolution		0.001μm		
	Scanning Speed		0.1~2mm/s		
	Measuring Force		10~150mN(Adjustable)		
	Max Slope		Uphill 78°, downhill 87°		
	Y Direction Object Table		Travel range 25mm, Overall height 85mm(Motorized table is optional)		
Thread Meas.	Thread Measuring Range		Internal: M3~M200, External: M3~M200(Determined by optional jigs)		
	Accuracy(Maj., Pit., Min. Diamter)		≤±(4+L/100) μ m, L is measured length in mm		
	Accuracy(Thread Pitch)		≤±(1 +L/100) μ m, L is measured length in mm		
Contour Meas.	Diameter Measuring Range		Internal: φ3~φ200, External: φ3~φ200(Determined by optional jigs)		
	Diameter Measuring Accuracy		≤±(3+L/100) μ m, L is measured length in mm		
	Profile Degree Accuracy		≤±(2 +L/100) μ m, L is measured length in mm		
Roughness Meas. (Optional)	Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPl, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPc, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, Profl, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D		
	Ra Measuring Range		Ra0.1μm~Ra64μm		
	Accuracy		5%		
	Filter		2RC filtering, Gaussian filtering and Zero phase filtering		
	Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0, 25mm selectable		
	Evaluation Length		Automatic calculation		
	Cutoff Wavelength		0.25/0.8/2.5(mm) or User-defined cut-off		
Size(L×W×H)			1200×490×980mm	1200×490×1180mm	1200×490×1180mm
Weight			100kg	200kg	200kg

SJ5720-OPT Series Profilometers for Optics Surface



SJ5720-OPT100



SJ5720-OPT200

Description

The SJ5720-OPT series is capable to measure both surface roughness and profile after once scanning. Moreover, there is a dedicated software module for measurement and analysis of large aspheric surface, so this series is an ideal measurement solution for the optical lens industry.


It can also be used for profile and roughness measurement for large curved surface, such as bearings, artificial joints, precision molds, gears, blades, etc. Consequently, it is widely used in precision machining, automobiles, bearings, machine tools, molds, precision hardware and other industries.

Features

1. Evaluate profile and roughness parameters at the same time after once scanning
2. High precision, high stability, and high repeatability
3. Aspheric optical software module
4. Intelligent management and advanced software analysis system
5. Intelligent protection system during scanning
6. Flexible manual control
7. High stability vibration isolation system

Software

- Professional aspheric surface measurement software can analyze all aspheric surface.
- parameters. There are some self-checking parameters in the software, so the correctness of the input formula can be determined by self-checking.

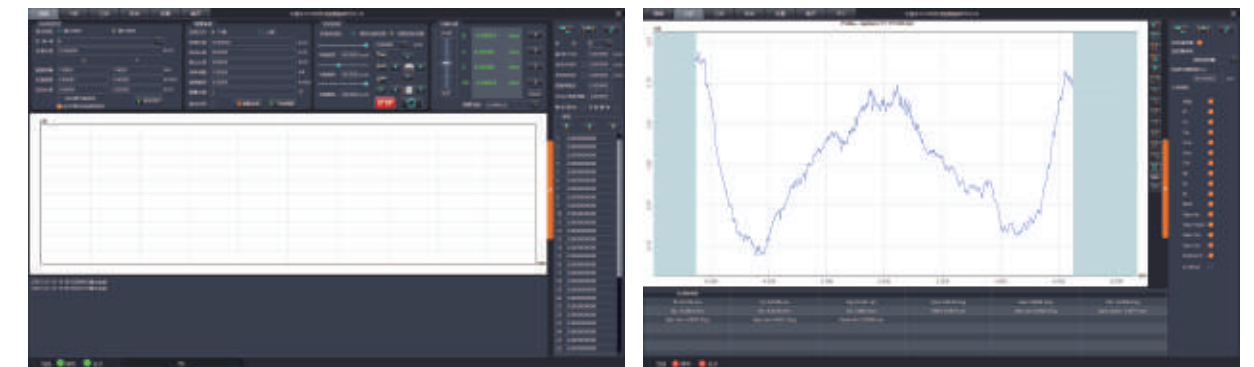


Aspheric surface measurement interface


Application




Lens

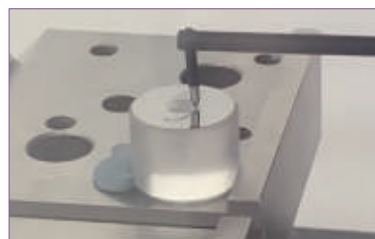

Intraocular lens mold

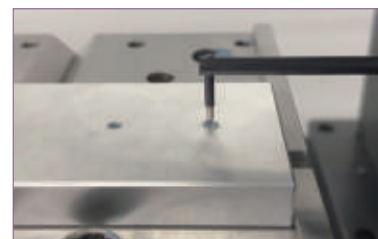


Vehicle Lens

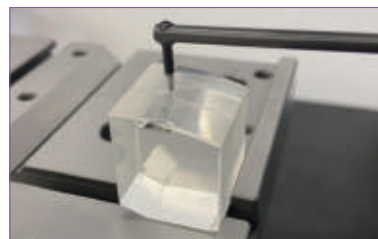

Infrared lens



Optical mold

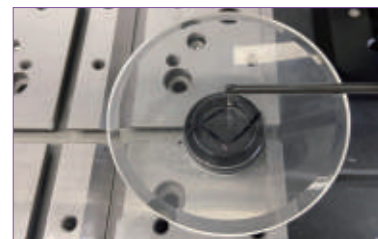

Lens

Parameters

Model No.			SJ5720-OPT100
Contour Measurement	Measuring Range	X	0~100mm
		Z	0~300mm
		Z1	±6mm (Optional: ±12mm)
	Resolution		0.001μm
	Accuracy	Z1*1	≤± (0.5+0.03 H) μm (H, mm)
		Pt*2	Pt≤0.2μm
		Standard Ball*3	≤± (1+R/20) μm (R, mm)
		Angle*4	≤± 1'
	Moving Speed	X	0~20mm/s
		Z	0~20mm/s
	Scanning Speed		0.05~5mm/s
X Straightness*5		≤0.15μm/100mm	
Measuring Force		0.5mN, 0.75mN, 1mN, 2mN, 3mN(Adjustable)	
Roughness Measurement	Ra Measurement Range		Ra0.012μm~Ra12.5μm (Large range is optional)
	Accuracy*6		Ra0.012μm ~ Ra3.2 μm: ≤±(3nm+2.0%A),A(Ra)μm Ra3.201μm ~ Ra12.5μm : ≤±(3nm+3.5%A),A(Ra)μm
	Repeatability (1σ)*7		1σ≤1nm
	Measurement Residual*8		Rq≤3nm
	Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPC, Rdq, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPC, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, ProfI, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
	Aspheric Masurement Parameters		Micro profile parameters: Pt, Pa, Fig;Inclination parameters: Smx , Smn ; Horizontal axis angle parameter: Tilt; Distance parameters between the optical axis and the contour: Xp , Xv , Xt ; Root mean square roughness parameter: RMS; Slope parameters: Slpe mx , Slpemx (x), Slperms, Slpe are ; Vertex radius error parameter: Radius Err
	Filter		Gaussian filter, 2RC filter, zero phase filter
	Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm Selectable
	Evaluation Length		Auto calculation
Size(L×W×H)			600×350×890mm
Weight			195kg

Note:
*1 The accuracy is based on the measurement standard gauge block.
*2 The accuracy is based on the Pt test of standard ball smaller than diameter 25mm.
*3 The accuracy is based on the verification of the Φ 50mm standard ball with the arc exceeds 90 degrees.
*4 The accuracy is based on the measurement of the angle of polygonal prism.
*5 The accuracy is based on the measurement of optical flat.
*6 The accuracy is based on the measurement of standard roughness block.
*7 The repeatability is based on the measurement of 0.1-0.2μm square wave roughness block and standard step height block.
*8 The accuracy is is based on the measurement of 1nm level roughness block and optical flat.


Parameters

Model No.			SJ5720-OPT200
Contour Measurement	Measuring Range	X	0~200mm
		Z	0~500mm
		Z1	±6mm (Optional: ±12mm)
	Resolution		0.001μm
	Accuracy	Z1*1	≤± (0.5+0.03 H) μm (H, mm)
		Pt*2	Pt≤0.2μm
		Standard Ball*3	≤±(1+R/20) μm (R, mm)
		Angle*4	≤± 1'
	Moving Speed	X	0~20mm/s
		Z	0~20mm/s
	Scanning Speed		0.05~5mm/s
	X Straightness*5		≤0.25μm/200mm
Measuring Force		0.5mN, 0.75mN, 1mN, 2mN, 3mN(Adjustable)	
Roughness Measurement	Ra Measurement Range		Ra0.012μm~Ra12.5μm
	Accuracy*6		Ra0.012μm ~ Ra3.2 μm: ≤±(3nm+2.0%A),A(Ra)μm Ra3.201μm ~ Ra12.5μm : ≤±(3nm+3.5%A),A(Ra)μm
	Repeatability (1σ)*7		1σ≤1nm
	Measurement Residual*8		Rq≤3nm
	Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPC, Rdq, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPC, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, ProfI, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
	Aspheric Masurement Parameters		Micro profile parameters: Pt, Pa, Fig;Inclination parameters: Smx, Smn ; Horizontal axis angle parameter: Tilt; Distance parameters between the optical axis and the contour: Xp, Xv, Xt; Root mean square roughness parameter: RMS; Slope parameters: Slpex, Slpemy (x), Slperms; Vertex radius error parameter: Radius Err
	Filter		Gaussian filter, 2RC filter, zero phase filter
	Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm Selectable
	Evaluation Length		Auto calculation
Size(L×W×H)			800×500×1080mm
Weight			265kg

Note:
*1 The accuracy is based on the measurement standard gauge block.
*2 The accuracy is based on the Pt test of standard ball smaller than diameter 25mm.
*3 The accuracy is based on the verification of the Φ 50mm standard ball with the arc exceeds 90 degrees.
*4 The accuracy is based on the measurement of the angle of polygonal prism.
*5 The accuracy is based on the measurement of optical flat.
*6 The accuracy is based on the measurement of standard roughness block.
*7 The repeatability is based on the measurement of 0.1-0.2μm square wave roughness block and standard step height block.
*8 The accuracy is is based on the measurement of 1nm level roughness block and optical flat.

Profilometer SJ5730

Once Scanning for both Profile and Roughness

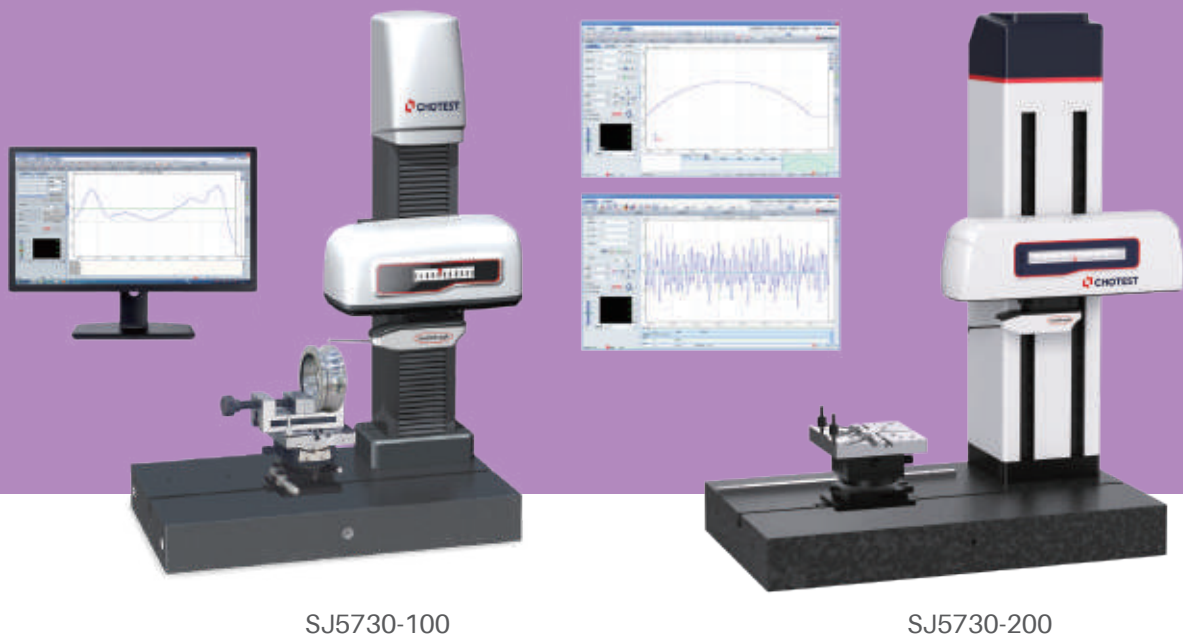

Application




Pt & Ra of bearing raceway



Ra of gear tooth surface



Ra of engine blade

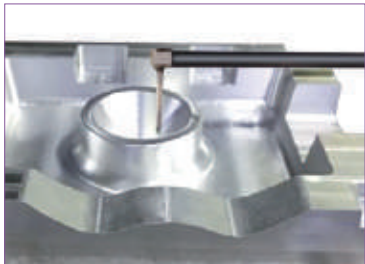

Ra & Profile of mold



Profile & Roughness of car parts



Profile & Roughness of workpiece

Parameters

Parameter classification		Parameters
Roughness Measurement	Contour Evaluation	P(Original profile), R(Surface roughness profile), W(Waviness)
	Roughness Evaluation	Ra, Rp, Rv, Rz, Rt, Rmax, Rq, Rsk, Rku, RSm, R _{Pc} , Rdq, Rdc, Rmr, Motif parameters, RCore parameters, P parameters, W parameters
	Filter	2RC filtering, Gaussian filtering and Zero phase filtering
	Cut-off Wavelength λ_s	0.008, 0.025, 0.08, 0.25, 0.8, 2.5, 8mm selectable
	λ_s	0.25, 0.8, 2.5, 8, 25um selectable, comply with the specifications of JJF 1099-2018, ISO 4288-1996, GBT 1031-2009
	Shape Error	Aspheric surface shape error measurement, linear shape error measurement, arc surface shape error measurement
	Standard	DIN EN ISO 4287:2010, ASME B46.1-2002, JIS B 0601:2013, GB/T 3505-2009, ISO 4287:1997, ISO 13565-2:1996, ISO 1302:2002
Contour Measurement	Common tools	Provides 76 tools, including coordinate creation, construction tools, auxiliary tools, annotations, and geometric tolerances
	CNC Function	Provide CNC measurement mode for batch measurement
	Custom Meas.	Customize the measurement process according to the characteristics of the workpiece (such as surface with hole in the center), avoids the unnecessary measurement area and perform discontinuous measurement.
	Special Tools	Ball screw measurement (corrected helix angle), thread measurement, stage height, groove depth, groove width, area, convexity etc

Features

1. Evaluate Contour and roughness parameters at the same time after once scanning
2. High precision, high stability, and high repeatability
3. Intelligent management and advanced software analysis system
4. Intelligent protection system during scanning
5. Flexible manual control
6. Nano-scale large roughness measuring range
7. Plug-in probe, easy to replace probe
8. Extremely small measuring force to avoid scratching the surface

Parameters

Model No.			SJ5730-100
Contour Measurement	Measuring Range	X	0~100mm
		Z	0~300mm
		Z1	±6mm (Optional: ±12mm)
	Resolution		0.001um
	Accuracy	Z1*1	≤± (0.5+0.03 H) μm (H, mm)
		Pt*2	Pt≤0.4μm
		Standard Ball*3	≤± 1μm(R≤10mm) ; ≤±(0.17+R/12) μm (10<R≤200mm)
	Angle*4		≤± 1'
	Moving Speed	X	0~20mm/s
		Z	0~20mm/s
Scanning Speed		0.05~5mm/s	
X Straightness*5		≤0.2μm/100mm	
Measuring Force		0.5mN,0.75mN,1mN,2mN,3mN(Adjustable)	
Roughness Measurement	Ra Measurement Range		Ra0.012μm~Ra12.5μm
	Accuracy*6		Ra0.012μm ~ Ra3.2 μm: ≤±(3nm+2.0%A),A(Ra)μm Ra3.201μm ~ Ra12.5μm : ≤±(3nm+3.5%A),A(Ra)μm
	Repeatability (1δ)*7		1δ≤1nm
	Measurement Residual*8		Rq≤3nm
	Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPC, Rdq, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPC, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, ProfI, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
	Filter		Gaussian filter, 2RC filter, zero phase filter
	Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm Selectable
	Evaluation Length		Auto calculation
Roller analysis			Roller convexity, position distance, logarithmic roller busbar, X-mirror curve coincidence, segmented different tolerances
Input			AC100-240V, 50/60Hz, 130W
Size(L×W×H)			600×350×890mm
Weight			110kg

Note:

*1 The accuracy is based on the measurement standard gauge block.

*2 The accuracy is based on the Pt test of standard ball smaller than diameter 25mm.

*3 The accuracy is based on the verification of the Φ 50mm standard ball with the arc exceeds 90 degrees.

*4 The accuracy is based on the measurement of the angle of polygonal prism.

*5 The accuracy is based on the measurement of optical flat.

*6 The accuracy is based on the measurement of standard roughness block.

*7 The repeatability is based on the measurement of 0.1-0.2μm square wave roughness block and standard step height block.

*8 The accuracy is based on the measurement of 1nm level roughness block and optical flat.

Parameters

Model No.			SJ5730-200
Contour Measurement	Measuring Range	X	0~200mm
		Z	0~500mm
		Z1	±6mm (Optional: ±12mm)
	Resolution		0.001μm
	Accuracy	Z1*1	≤± (0.5+0.03 H) μm (H, mm)
		Pt*2	Pt≤0.4μm
		Standard Ball*3	≤±1μm(R≤10mm); ≤±(0.17+R/12) μm (10<R≤200mm)
	Angle*4		≤±1'
	Moving Speed	X	0~20mm/s
		Z	0~20mm/s
Scanning Speed		0.05~5mm/s	
X Straightness*5		≤0.35μm/200mm	
Measuring Force		0.5mN,0.75mN,1mN,2mN,3mN(Adjustable)	
Roughness Measurement	Ra Measurement Range		Ra0.012μm~Ra12.5μm
	Accuracy*6		Ra0.012μm ~ Ra3.2 μm: ≤±(3nm+2.0%A),A(Ra)μm Ra3.201μm ~ Ra12.5μm : ≤±(3nm+3.5%A),A(Ra)μm
	Repeatability (1δ)*7		1δ≤1nm
	Measurement Residual*8		Rq≤3nm
	Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPC, Rdq, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPc, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, ProfI, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
	Filter		Gaussian filter, 2RC filter, zero phase filter
	Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm Selectable
	Evaluation Length		Auto calculation
Roller analysis			Roller convexity, position distance, logarithmic roller busbar, X-mirror curve coincidence, segmented different tolerances
Input			AC100-240V, 50/60Hz, 130W
Size(L×W×H)			800×500×1080mm
Weight			180kg

Note:

*1 The accuracy is based on the measurement standard gauge block.

*2 The accuracy is based on the Pt test of standard ball smaller than diameter 25mm.

*3 The accuracy is based on the verification of the Φ 50mm standard ball with the arc exceeds 90 degrees.

*4 The accuracy is based on the measurement of the angle of polygonal prism.

*5 The accuracy is based on the measurement of optical flat.


*6 The accuracy is based on the measurement of standard roughness block.

*7 The repeatability is based on the measurement of 0.1-0.2μm square wave roughness block and standard step height block.


*8 The accuracy is based on the measurement of 1nm level roughness block and optical flat.

Profilometer SJ5760 Series

Independent Profile and Roughness Measurement Module

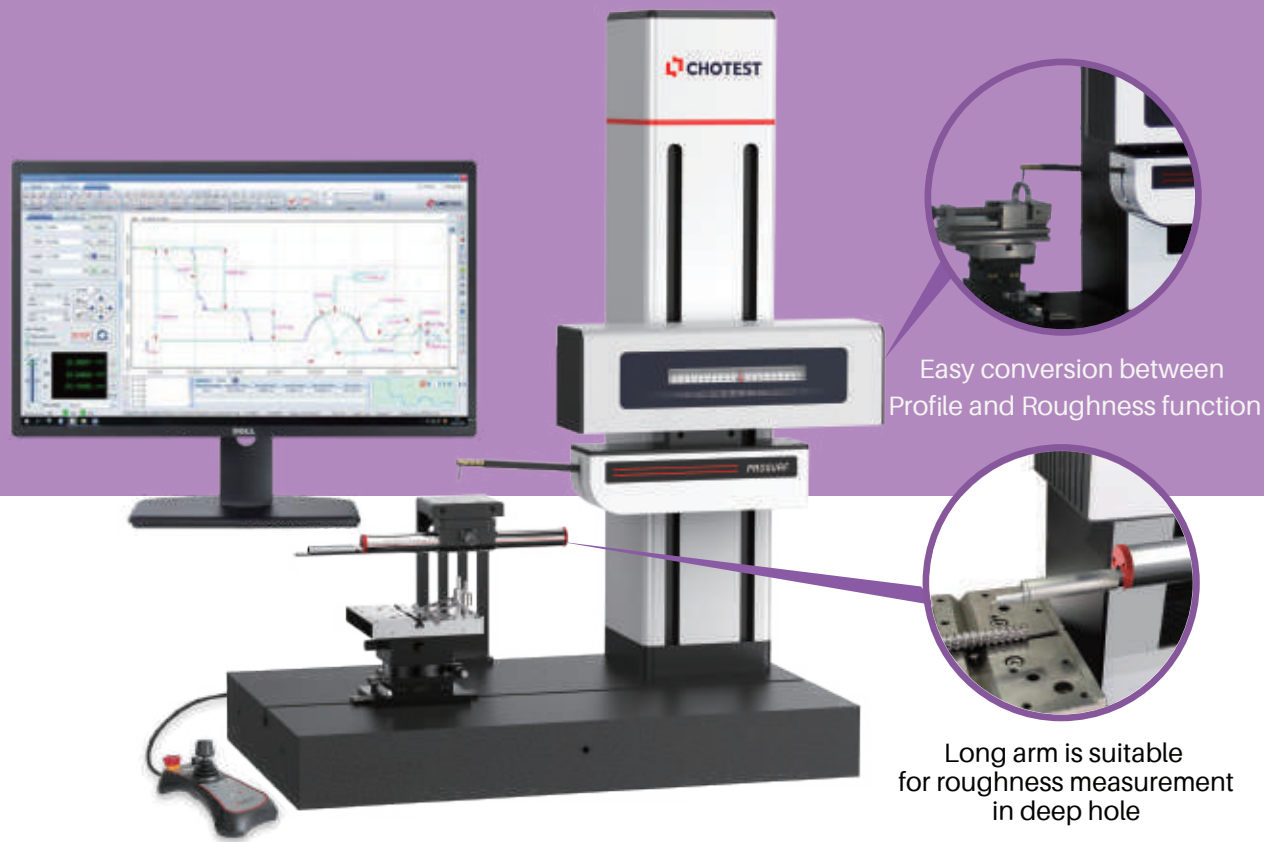

Application

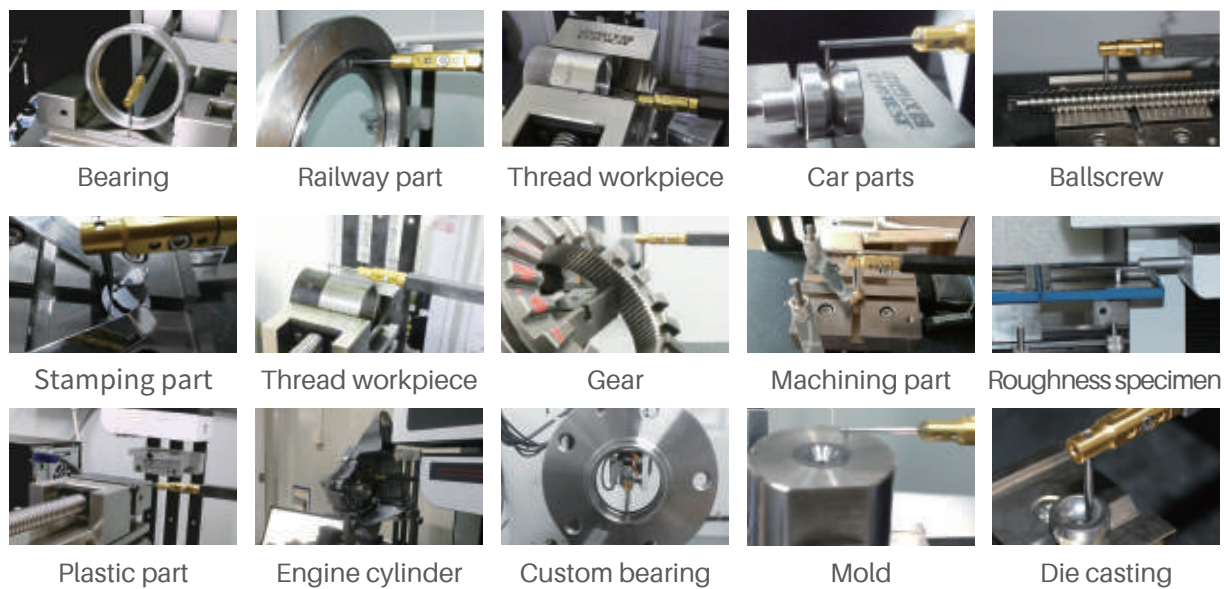


Software

Surf & Rough X is an user-friendly and powerful software, which is completely developed by Chotest. It can analyze not only surface contour, but also evaluate surface roughness. Surf & Rough X contains 76 kinds of utility tools, such as coordinate system, construction tools, geometric tolerance, surface roughness assessment tools, etc. CNC measurement mode is a convenient function for batch measurement, and it improves measurement efficiency greatly. Moreover, discontinuous measurement function is also available for the special workpieces.

Functions

		GD & T	Straightness, roundness, position degree, parallelism, perpendicularity, profile tolerance, etc.
		Custom Program	The measurement process can be customized according to the characteristics of the workpiece (Set the probe to jump deep holes, steep slopes or obstacles).
		CNC Mode	The one-key measurement program can be built for batch measurement. If the tolerance is also entered to the program, the measurement result will be automatically judged as OK or NG.
		Coordinate system	Coordinate system could be established by point-line or line-line, and it could be translated and rotated.
		Special Tool	Ball screw shaft measurement(corrected helix angle),thread measurement, step height, groove depth, groove width, area, curvature, etc.
		Report	Export report in .doc, .xls or .pdf, and support user-defined report template.
		Contour Comparison	After import CAD drawing to the software, the user can compare the difference between drawing and scanning contour.
		Roughness	Ra, Rp, Rv, Rz, Rt, Rmax, Rq, Rsk, Rku, RSm, R _{Pc} , Rdq, Rdc, Rmr, Pa, Pq, Pt, Pp, Pv, Psm, Psk, Pku, Pdq, Plq, Pdc, PHSC, Ppc, PMr, Waviness of Profile, Motif, etc.

Profile Example

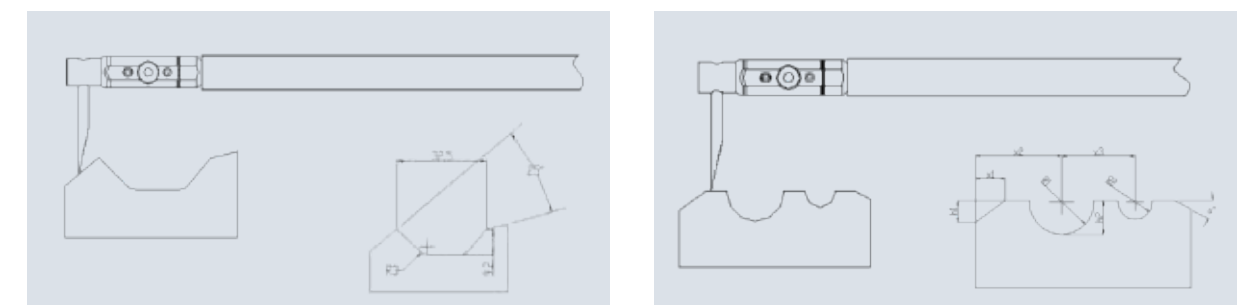

Software

Scanning Settings:

Set measuring conditions, inspection info and scanning positions.

System Setting:


Different function modules.

Switch meas. function:

Switch between profile measurement and roughness measurement.

Scanning graph window:

Display the scanning graph and perform the analysis operation.

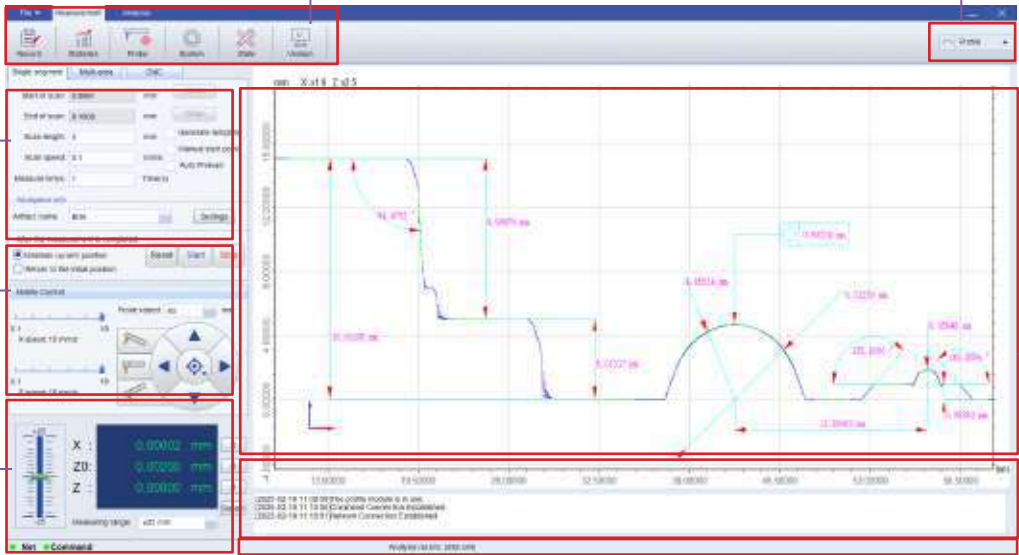

Motion control:

Control probe to move ↑, ↓, ←, →, and stop, reset.

Coordinate display:

Display the coordinates of current probe position.


Status Bar:

Network, serial port, unit, operation tips, login time, user name, etc.


Analysis data:

List features, measured data and tolerance.

Measurement Interface

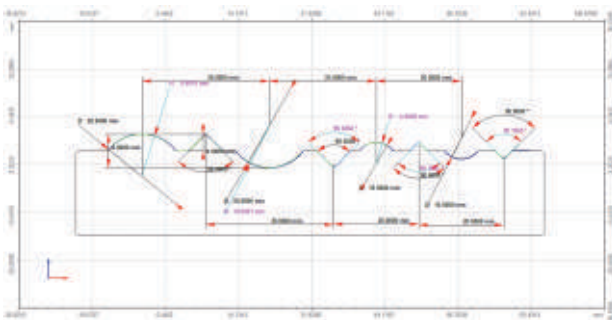

Contour measurement

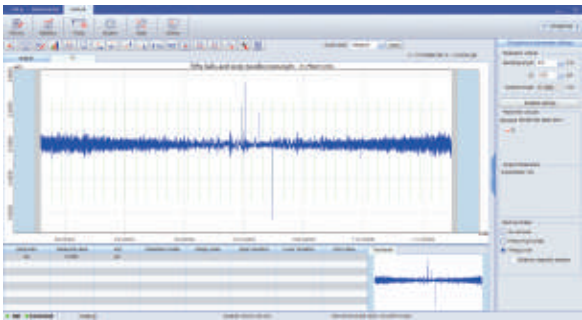


Roughness measurement

Parameters


Model No.		SJ5760-PR
Travel Range	X	0~200mm
	Z	0~450mm
Size(L×W×H)		800×450×1100mm
Weight		220Kg
Contour Measurement(SJ5760-P)		
Measuring Range	Z1	±25mm
	Resolution	0.001μm
Indication Error	X	±(0.6+0.015L)μm(L, mm)
	Z1	±(0.6+0.05H)μm(H, mm)
	Standard Ball	≤±(1+R/15)μm(R, mm)
Moving speed	Angle error	≤±1'
	X	0~20mm/s
	Z	0~20mm/s
Scanning Speed		0.05~5mm/s
Max Slope		Uphill 77°, downhill 88°
Straightness		≤1μm/200mm
Scanning Force		10~70mN Adjustable(Larger force is optional)
Roughness Measurement(SJ5760-R)		
Measuring Range	Z0	±400μm(Optional:±1000μm)
	Sensor Type	Railless
	Ra Range	Ra0.1μm~Ra64μm
Scanning Force		1mN
Resolution	Z0	0.001um
Indication Error		≤±(5nm+2.5%A)μm, A(Ra)μm
Repeatability		≤1nm
Scanning Speed		0.05~0.5mm/s
Measurement Residual		≤0.005μm
Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPl, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPc, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, Prof, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
Filter		2RC filtering, Gaussian filtering and Zero phase filtering
Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm selectable
Evaluation Length		Auto calculation
Film Thickness Measurement	Measuring Range	60μm or less

SJ5718 Series

Economic Profilometers

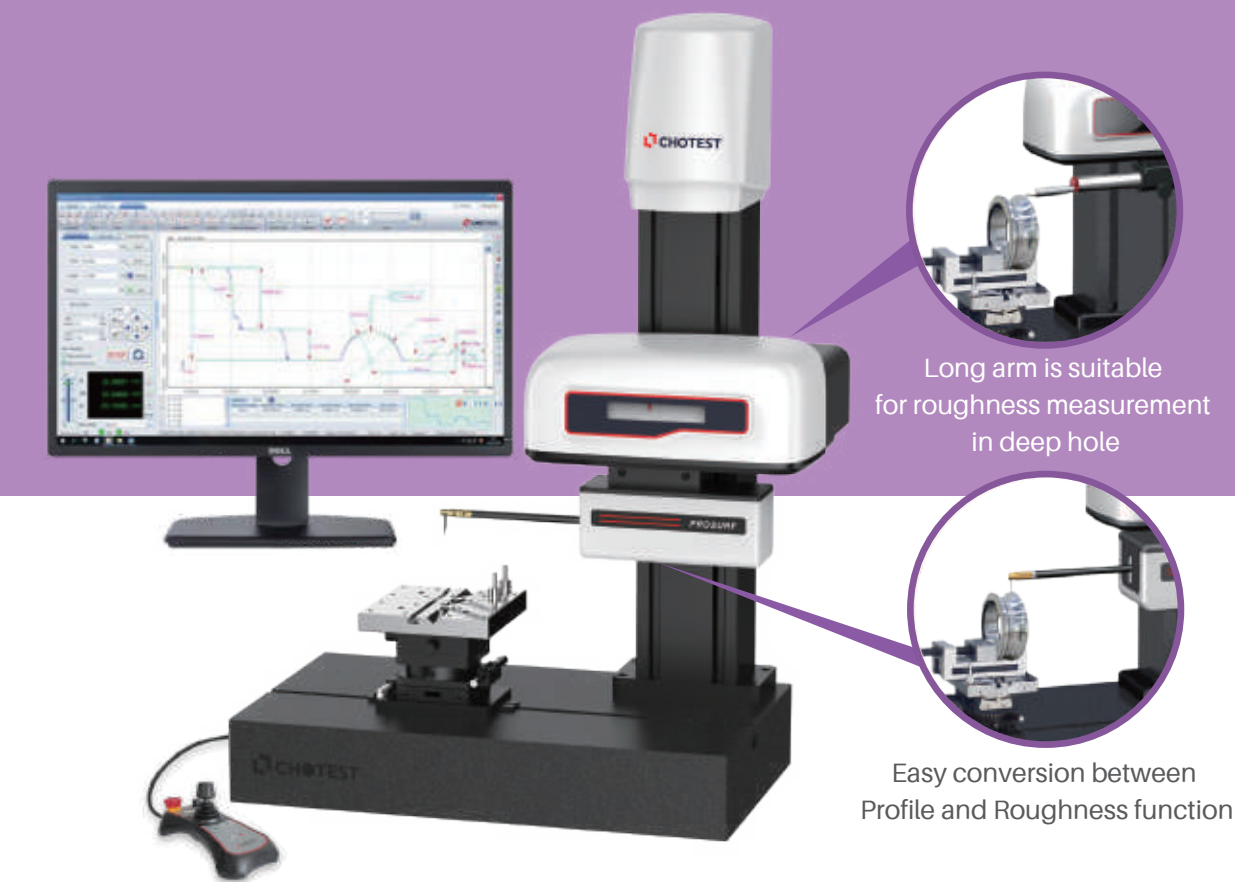

Application

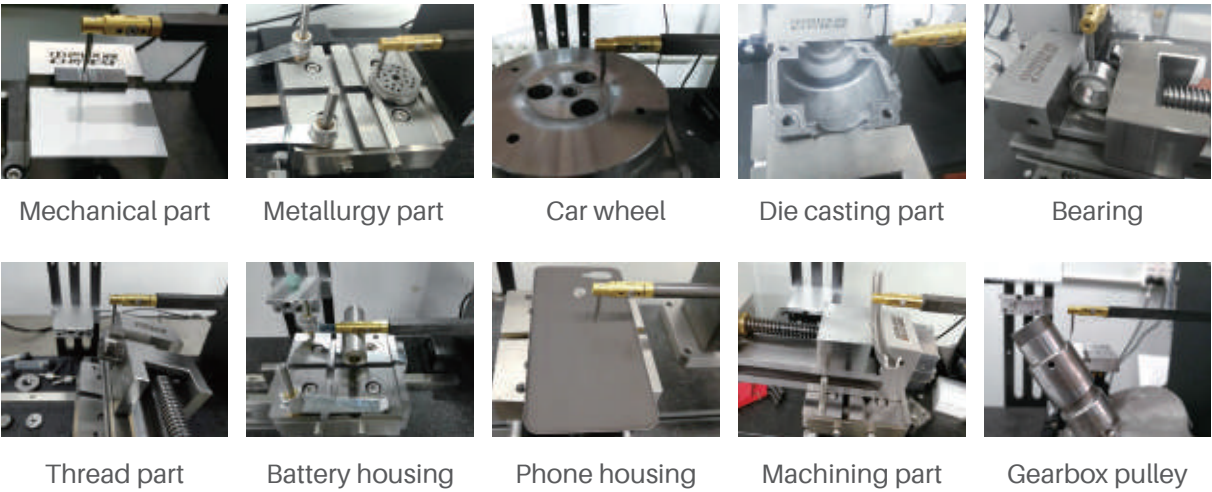


Parameters

Model No.		SJ5718-PR
Travel Range	X	0~100mm
	Z	0~300mm
Size(L×W×H)		600×350×890mm
Weight		120Kg
Contour Measurement(SJ5718-P)		
Measuring Range	Z1	±30mm
	Resolution	0.001um
Indication Error	X	±(0.6+0.02L)μm(L,mm)
	Z1	±(0.6+0.05H)μm(H,mm)
	Standard Ball	≤±(1.2+R/15)μm(R,mm)
	Angle error	≤±1'
Moving speed	X	0~20mm/s
	Z	0~20mm/s
Scanning Speed		0.05~5mm/s
Max Slope		Uphill 77°, downhill 88°
Straightness		≤0.5μm/100mm
Scanning Force		30mN
Roughness Measurement(SJ5718-R)		
Measuring Range	Z0	±400μm(Optional:±1000μm)
	Sensor Type	Railless
	Ra Range	Ra0.1μm~Ra64μm
Scanning Force		1mN
Resolution	Z0	0.001um
Indication Error		≤±(5nm+2.5%A)μm, A(Ra)μm
Repeatability		≤1nm
Scanning Speed		0.05~0.5mm/s
Measurement Residual		≤0.005μm
Roughness Parameters		R roughness: Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, RPc, Rdq, Rdc, Rmr, Rmax, Rpm, tp, Htp, Pc, Rda, Ry, Sm, S, Rpq, Rvq, Rmq, RzJ, Rv1max, Rp1max, Rz1max, Rmr(Rz/4), maxRa, R5z, R3z, Rh, Dq, Lq, SD Key roughness: Rcore: Rk, Rpk, Rvk, Mr1, Mr2, A1, A2 Profile: Pa, Pq, Pt, Pz, Pp, Pv, PSm, Psk, Pku, Pdq, Pdc, Pc, PPC, Pvq, Pmr, Pmq, Rad, PzJ, Pmax, StpHt, TIR, Avg, Slope, Area+, Area-, Area, Profl, Edge, StpWd, Bumpht Waviness of profile: Wa, Wq, Wt, Wz, Wp, Wv, WSm, Wsk, Wku, Wdq, Wdc, Wmr, Wpc, Wc, Wh, Wmr(WZ/4) Motif: R, AR, W, AW, Rx, Wx, Wte, Nr, Ncrx, Nw, Cpm, CR, CF, CL ISO5436: Pt5436, D
Filter		2RC filtering, Gaussian filtering and Zero phase filtering
Sampling Length		0.008, 0.08, 0.25, 0.8, 2.5, 8.0 or 25mm Selectable
Evaluation Length		Auto calculation
Film Thickness Measurement	Measuring Range	60μm or less

Stylus Nano Profiler NS200

Surface micro-nano profile measurements

- Powerful data collection and analysis system
- Excellent repeatability and reproducibility

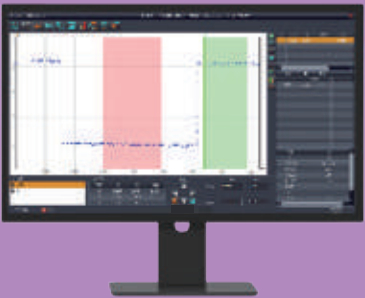

Constant
micro force sensor:
1-50mg adjustable

Ultra-flat object table

Visual navigation system,
5MP colorful camera

Motorized X/Y/Z stage,
Motorized 360° rotation

Description

Stylus Nano Profiler NS200/NS200-D is an ultra-precision contact measuring instrument for measurement of surface roughness and microscopic profile, such as micro-nano step height, film thickness. The NS200 uses a displacement sensor with sub-angstrom resolution, ultra-low noise signal acquisition, ultra-fine motion control, and calibration algorithms technology with excellent performance. Its contact force is extremely small, and there are no special requirements for measuring surface reflection characteristics, material types, and material hardness, consequently, it is widely used to measure microscopic surface for industries of semiconductors and compound semiconductors, high-brightness LEDs, solar energy, MEMS micro-electromechanical systems, touch screens, automotive and medical equipment.

Application

Semiconductor	Large Substrate	Glass substrate and display	Film on flexible component
• Step height of deposited film • Step height of thin Film Resist • Etch rate measurement • Chemico-mechanical polishing (corrosion, pitting, bending)	• PCB protrusion, step height • Window coating • Wafer mask • Wafer chuck coating • Polishing plate	• AMOLED • Step height measurement during LCD screen development • Thickness measurement for touch panel film • Solar coating thin film	• Organic photodetector • Organic films printed on film and glass • Touch screen copper traces

Parameters

Model No.		NS200	NS200-D
Sample Observation	Front View Navigation	5MP Colorful Camera F.O.V.: 2.2x1.7mm	5MP Colorful Camera F.O.V.: 10x13.4mm
	Side View Navigation	/	5MP Colorful Camera F.O.V.: 2x2.68mm
Sensor		Ultra low Inertia, LVDC sensor	
Measuring Force		1-50mg Adjustable	
Stylus		Tip radius 2μm, angle 60°, Magnetic mounting	
XY Travel Range		Motorized X/Y (150mm150mm), manually adjustable leveling	
Sample R-θ Stage		Motorized, 0~360° continuous rotation	
Vacuum Chuck		8-inch vacuum chuck	
Single Scan Length		55mm	
Max Scanning Range		150(XY travel) + 55mm scanning range, max range is 8 inches	
Max Sample Height		50mm	
Max Wafer Size		200mm(8")	
Step Height Repeatability*1		5 Å @ Range 330μm/ 10 Å @ Range 1050μm (Measure step height 1μm, 1δ)	
Sensor Range*2		330μm or 1050μm	
Scanning Speed		2μm/s~ 10mm/s	
Max Scan Sampling Points		12000	
Size(L×W×H)		630×610×500mm	640×650×530mm
Weight		40kg	
Input		AC100~240V, 50/60 Hz, 200W	
Working Environment		Humidity: 30~40% RH(No condensation), Temp.: 16~25°C(Fluctuation < 2°C/h), Ground vibration: 6.35μm /s(1~ 100Hz), Audio noise: ≤80dB Air laminar flow: ≤ 0.508 m/s(Downward flow)	

Note:
*1 Repeatability data was measured in a laboratory environment that meets VC-C standards and it is equipped with an anti-vibration table. If these conditions are not met, the repeatability data will be doubled.
*2 The sensor range can only be selected between 330μm and 1050μm. Probes are installed by magnetic mounting. If there are no features requiring an ultra-large range probe, it is recommended to use the 330μm one.

Machine Tool Probes PO Series

Precision, Reliable



PO60


PO40

PO40L

PO series contains 3-point trigger unit inside the probe, which is the most stable structure. When the stylus is moved radially or axially by external force, the trigger unit is triggered. Then the circuit inside of probe sends a triggering signal to the receiver, and the receiver transmits it to the machine tool, consequently the present coordinates of each axis of the machine tool are recorded automatically. Finally measurement results are calculated according to the coordinate records of related points.

Features

- High repeatability: One-way repeatability <1μm
- Long standby time: As long as 6 months
- Omnidirectional energy-absorbing design: 360° omnidirectional energy-absorbing design, which helps to cushion the spindle in impact when an operating accident occurs
- Waterproof design: IP68 for probe and receiver
- Intelligent LED indicators: Show current working status of the probe

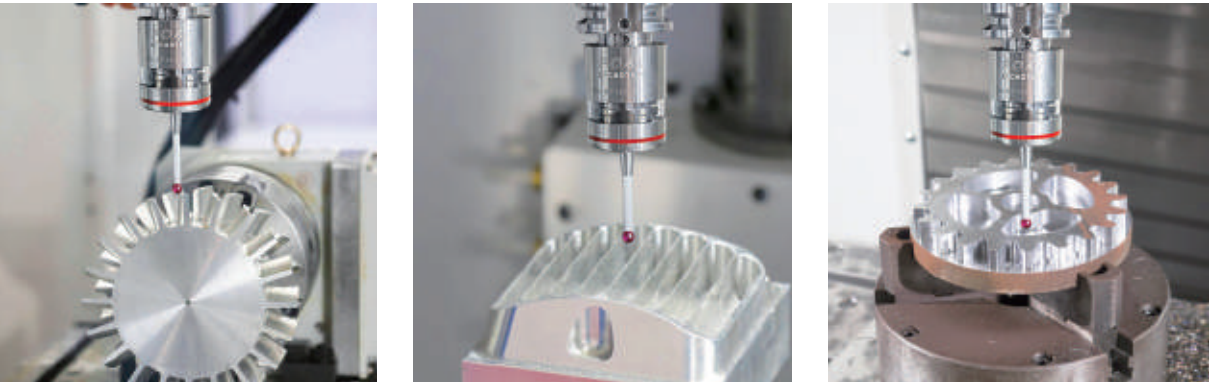

Parameters

- 1) Storage temperature: (-25~70)°C
- 2) Working temperature: (5~55)°C

Model No.	PO40	PO60	PO40L
Size	Φ40mm×L50mm	Φ63mm×L76mm	Φ40mm×L52mm
Weight(Without Holder)	260g	880g	280g
Transmission Type	360° IR	360° IR	360° IR
Transmission Distance	5m	6m	5m
Starting Mode	Code M	Code M, Revolve	Code M
Rotational Speed	Max 1000rev/min	Max 1000rev/min	Max 1000rev/min
Power Supply	1/2AA 3.6V battery×2	AA1.5V/3.6V battery×2	1/2AA 3.6V battery×2
Triggering Direction	±X/±Y/-Z	±X/±Y/-Z	±X/±Y/-Z
Repeatability of One-way triggering 2σ*1	1μm	2μm	1μm
Max overrun*2	XY:12.5mm +Z:6mm	XY:21mm +Z:11mm	XY:12mm +Z:6mm
XY Trigger Force*3	0.5N~ 0.9N	0.5N~1.6N Adjustable	0.3N~1.6N Adjustable
Z Trigger Force	5.8N	3.5N~14N Adjustable	4N~10N Adjustable
Application	Small and mediumsized 3-axis, 5-axis machining center	Large gantry machine tool, horizontal machining center	CNC lathe or turning-milling composite machining center


Note: .
*1: Test with a 50mm straight stylus under speed 480mm/min
*2: Test with a 50mm straight stylus
*3: Test with a 50mm straight stylus under speed 480mm/min

Parameters of Receiver

- 1) Transmission type: IR, 360°
- 2) Working range: Max 8m
- 3) Weight: 926g
- 4) Input voltage: 12V~ 30V
- 5) Input current: <100mA, receiving <40mA
- 6) Cable to machine controller: dedicated 13PIN shielded cable, 8 meters or 15 meters
- 7) Storage temperature: (-25~70)°C, working temperature: (5~55)°C




COMI Receiver

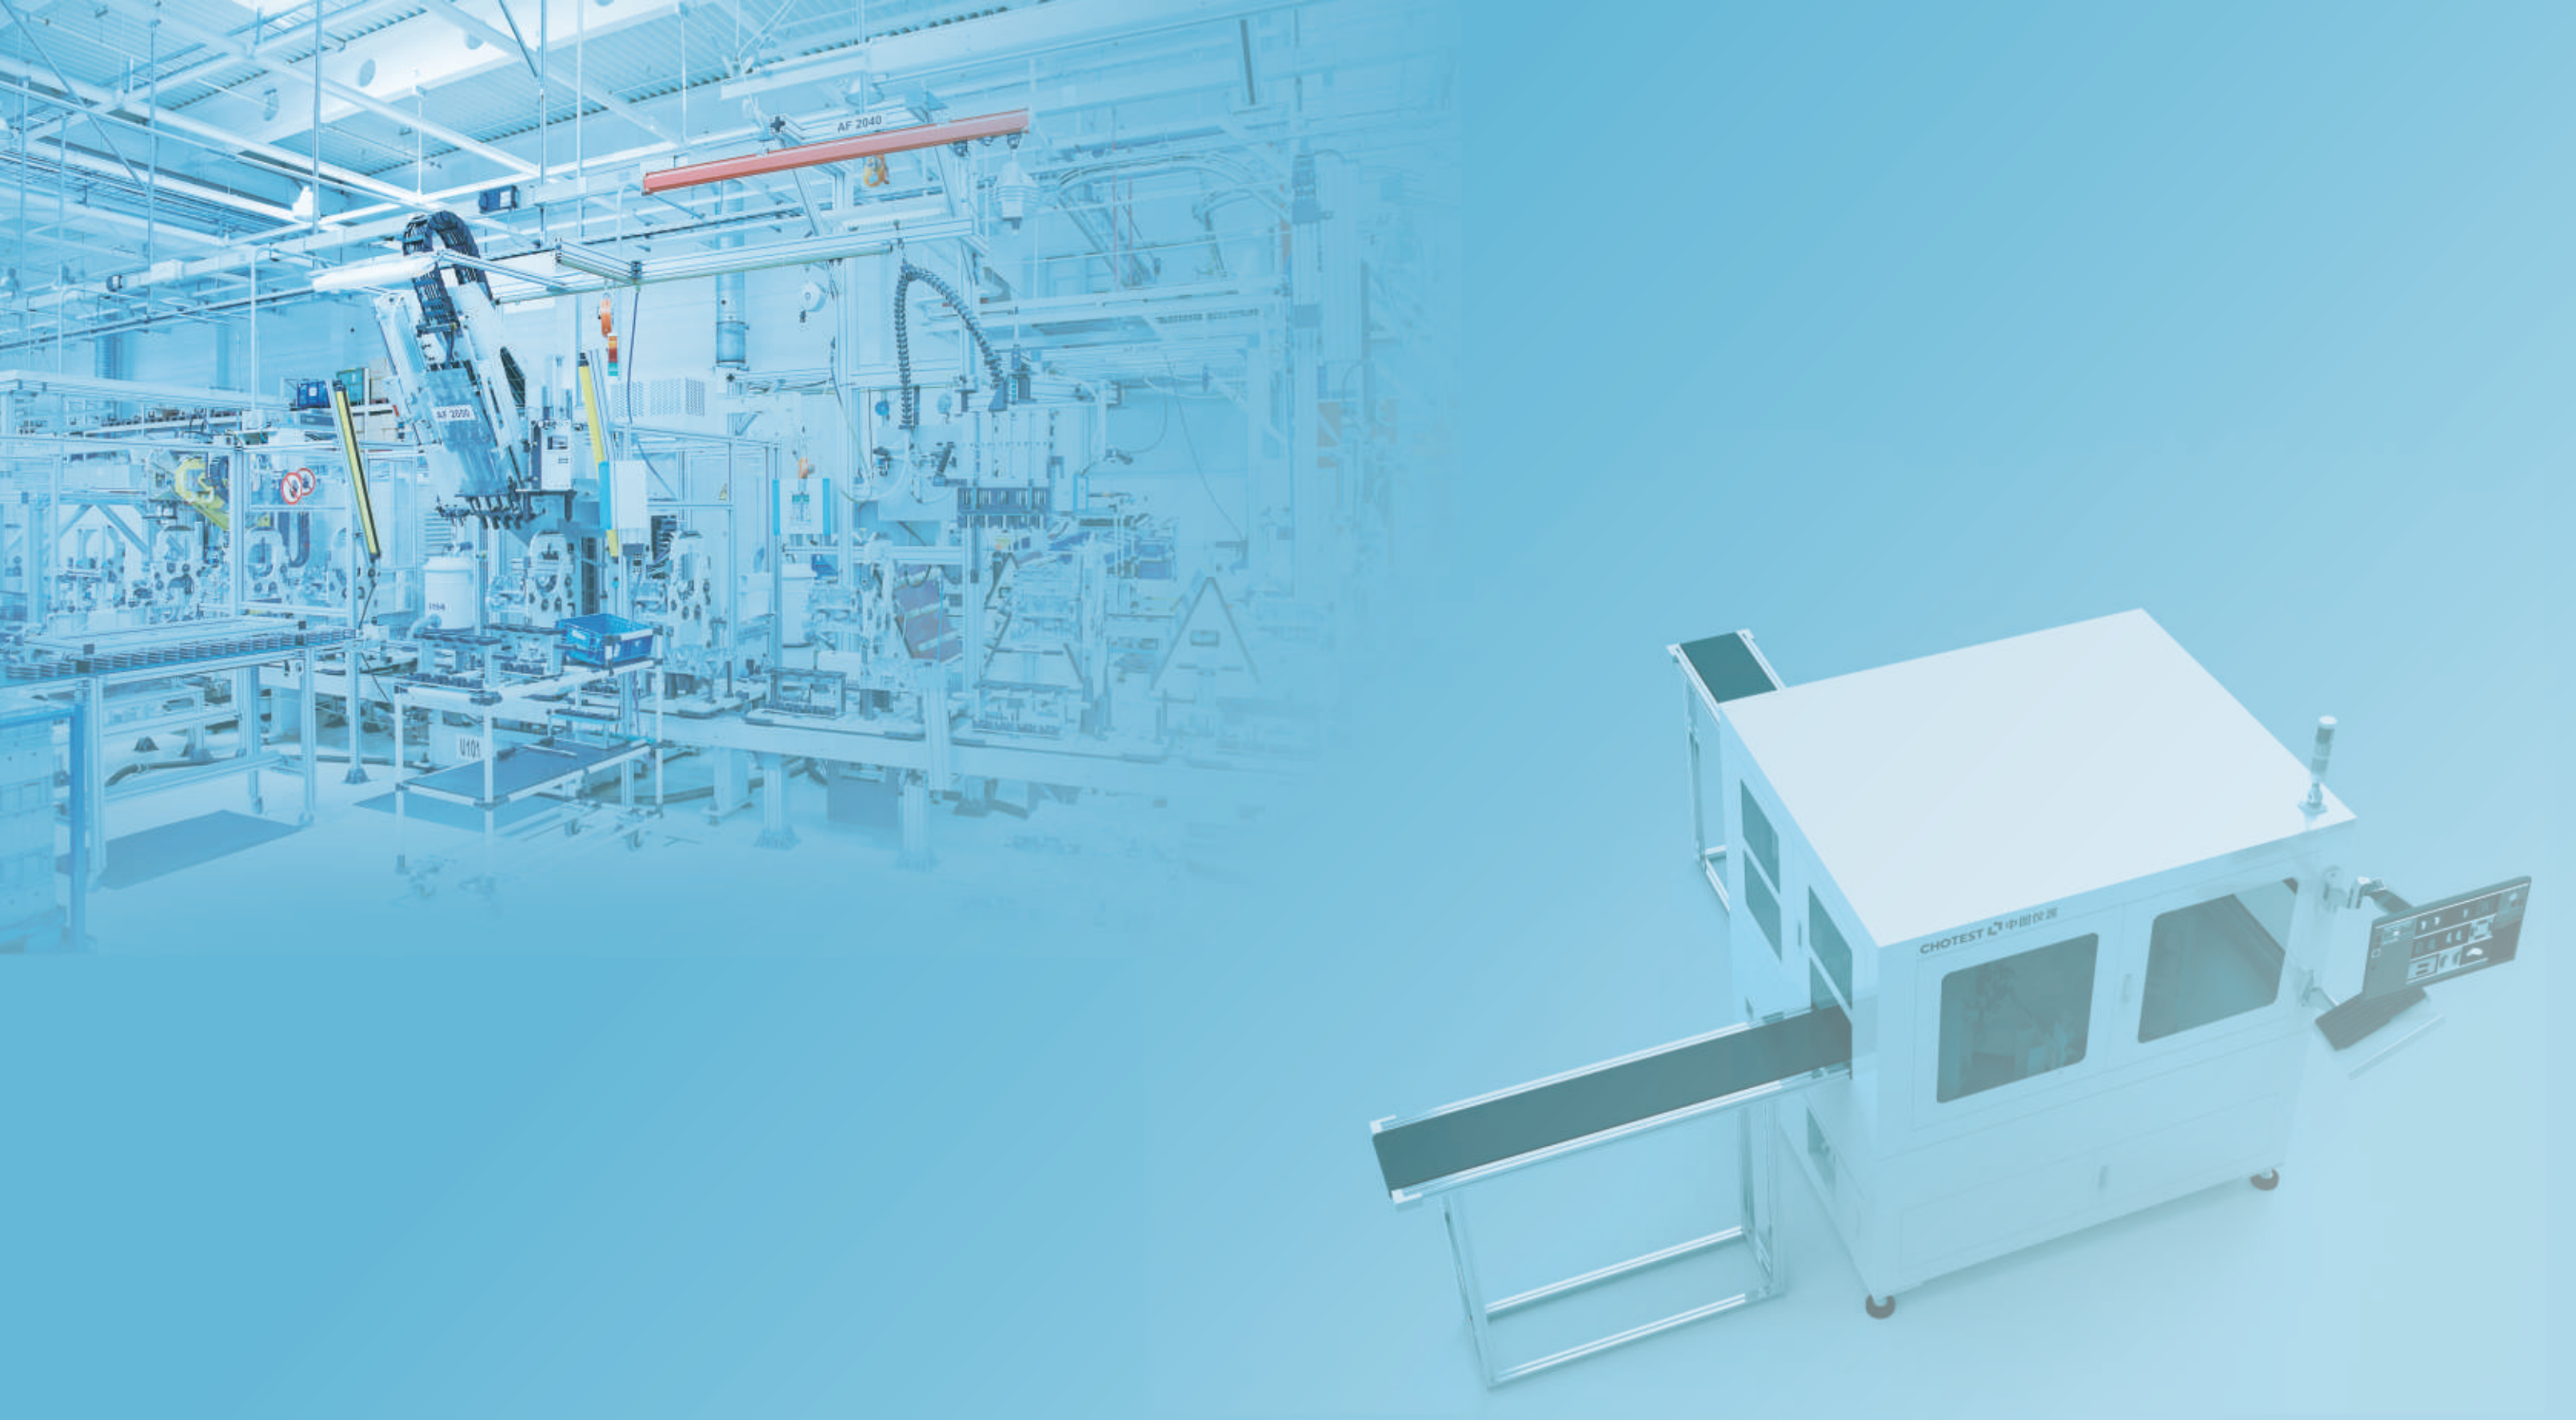

Professional Inspection Equipment

WD4000 Series Unpatterned Wafer 3D Inspection System


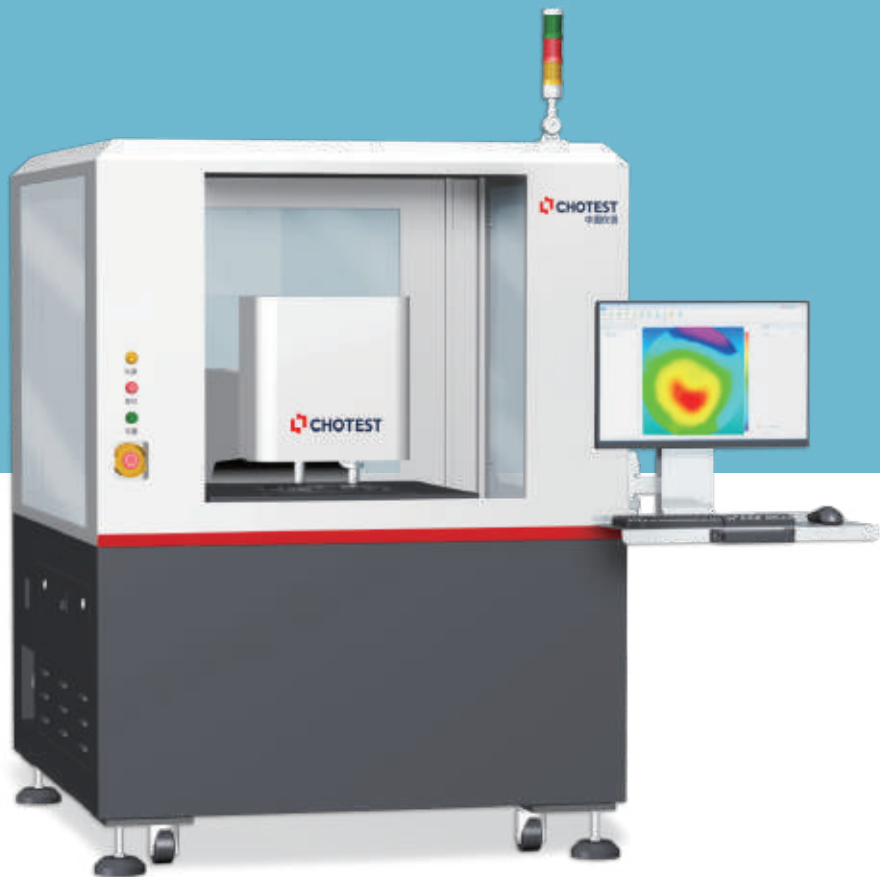


Description

Unpatterned Wafer 3D Inspection System WD4000 series can automatically measure wafer thickness, surface roughness, and micro-nano 3D microtopography at a time. Use white light confocal probes to measure wafer thickness, TTV, LTV, BOW, WARP, line roughness; use white light interferometry probe to scan the Wafer surface to create a 3D profile image of the surface , then analyze the roughness and relevant 2D and 3D parameters according to ISO/ASME/EUR/GBT standards.

Application

Thickness and warpage measurement for unpatterned wafer

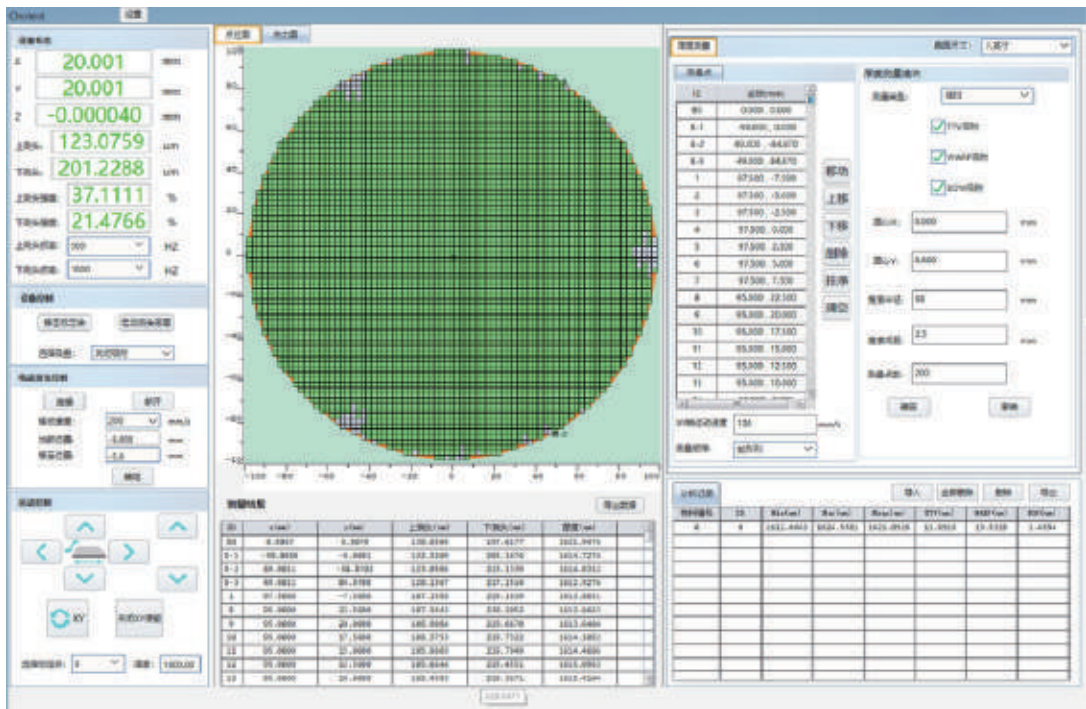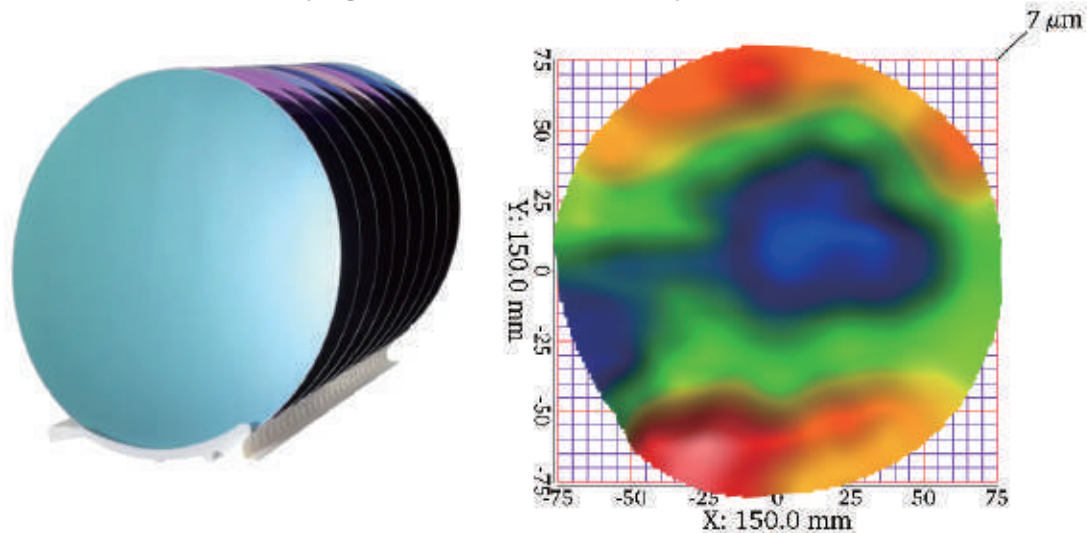

Measurement results of wafer thickness and warpage


The 3D shape based on the upper and lower surfaces of the wafer is reconstructed by non-contact measurement. The powerful measurement and analysis software ensures the stable calculation for the thickness, roughness, total thickness variation(TTV) of the wafer.

Application


Roughness measurement for unpatterned wafer




Thinned silicon wafer



3D image of rough grinding silicon wafer



3D image of fine grinding silicon wafer

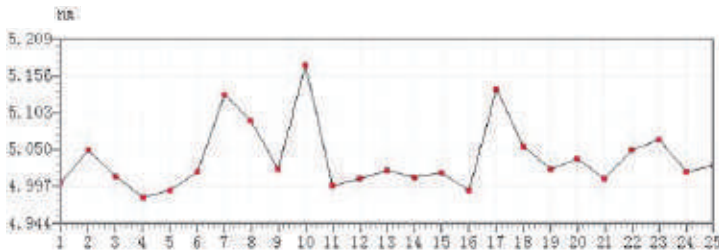

Sa curve of 25 times measurement data for fine grinding wafer

文件		3D参数分析				
序号	名称	图例	Sq[高度参数]1L	Sp[高度参数]1L	Sq[高度参数]15L	Sq[高度参数]15L
1	sa_1		7.587	25.179	329.103	344.283
2	sa_2		8.288	24.884	319.429	344.113
3	sa_3		7.092	24.394	316.209	340.633
4	sa_4		6.772	25.329	320.325	345.654
5	sa_5		6.909	24.388	318.774	343.102
6	sa_6		7.330	24.164	316.117	340.280
7	sa_7		9.190	24.474	308.325	332.754
8	sa_8		8.700	24.910	319.090	343.961
9	sa_9		7.583	25.466	313.952	338.818
10	sa_10		9.636	24.814	318.285	343.119
11	sa_11		7.209	25.343	318.515	343.858
12	sa_12		7.149	25.556	318.074	343.630
13	sa_13		7.425	24.911	318.300	345.211
14	sa_14		7.481	25.519	318.556	344.078
15	sa_15		7.340	24.688	318.258	342.927
16	sa_16		6.986	24.710	312.800	337.536
17	sa_17		9.301	24.702	313.648	338.350
18	sa_18		7.826	25.271	314.404	336.766
19	sa_19		7.284	24.603	311.570	338.472
20	sa_20		7.684	24.840	316.623	341.563
21	sa_21		7.260	25.017	310.442	335.479
22	sa_22		7.757	25.110	315.120	340.250
23	sa_23		8.493	24.773	316.354	341.127
24	sa_24		7.373	24.986	316.743	341.729
25	sa_25		7.545	25.111	316.922	341.933
统计		平均	7.734	24.935	316.292	341.227


Multi-file analysis of 25 times measurement data for fine grinding wafer

During rough grinding and fine grinding process for the Wafer thinning, the surface roughness Sa values and their stability are used to evaluate the processing quality. When the thinned silicon wafer is measured in the strong noise environment of the production workshop, the roughness Sa values of the fine grinding silicon wafers are ranging around 5nm, and the repeatability is 0.046987nm based on 25 times of measurement data which proves the measurement stability is good.

Parameters

Model No.		WD4100	WD4200
Wafer Size		4", 6", 8", 12"	
Wafer Table		Vacuum chuck	
Loading and Unloading		Manual(Auto robot arm is optional)	
XYZ Travel Range		400mm/400mm/75mm	
Max Moving Speed		500mm/s	
Main Frame		Marble	
Anti-Vibration		Air-floating anti-vibration system	
Loading Capacity		≤3kg	
Overall Size		1500×1500×2000mm	
Weight		About 1500kg	
Compressed Air		0.6MPa; 60L/min	
Working Environment		Temp. 20°C±1°C/hour, RH 30~80%	
Ambient Vibration		VC-C or better	
Thickness Measurement System			
Material of Object		Arsenide, nitride, phosphorus, germanium, phosphorurate, lithium crickets, sapphire, silicon, silicon carbide, glass, etc.	
Sensor		High-precision white light confocal sensors	
Measuring Range		100μm~2000μm	
Scanning Path		Full map area scanning, Union Jack path, free multi-point	
Accuracy		±0.25μm	
Repeatability(σ)		0.2μm	
Resolution		25nm	
Measurement Parameters		Thickness, TTV (Total thickness variation), LTV, BOW, warp, flatness, line roughness	
3D microtopography Measurement System			
Measurement Principle		——	White light interferometry
Light Source		——	White LED
Objective Lens		——	10X(2.5X, 5X, 20X, 50X optional)
Field of View		——	0.96 mm×0.96 mm
Lens Turret		——	Single hole
Level Adjustment		——	±2°
Z-axis Scanning Range		——	5mm
Z-axis Resolution		——	0.1nm
Lateral Resolution		——	0.5~3.7μm
Scanning Speed		——	2.5~5.0μm/s
Characters of Test Object		——	Reflectivity 0.05%~100%
Roughness RMS Repeatability* ¹		——	0.08nm
Step Height Measurement* ²	Accuracy	——	1%
	Repeatability	——	0.2%1σ
Measurement Parameters		——	Microtopography, line/surface roughness, spatial frequency, etc.

Note:
*1 Roughness performance is obtained by measuring SQ parameters for a 0.2nm SA silicon wafer in the laboratory environment according to ISO 25178.
*2 Step height performance is obtained by measuring a standard 4.7μm stage block in the laboratory environment according to ISO 5436-1: 2000.

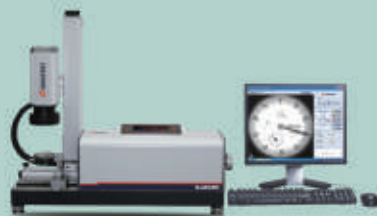

Dimensional Calibrators

SJ5100 Series Universal Length Measuring Machine

Absolute measurement over entire measuring range




Application



Big plain ring gauge



Spline plug gauge



Spline ring gauge



Taper thread ring gauge



Thread ring gauge



Snap gauge



Caliper



Micrometer 3 points



External micrometer



Setting bar



Small plain ring gauge



Internal micrometer



Long gauge block



Pin gauge



Inner ring of bearing



Taper thread plug gauge



Dial test gauge



Depth micrometer



Digital radius gauge



Carbon fiber comparison gauge

Functions

1. Measure gauge blocks, thread gauges, plain gauges, Taper thread/plain gauges, pin gauge, caliper, spline gauges, setting bars, snap gauges, internal/external micrometers, feeler gauges, Dial indicators, dial bore gauge, dial test gauges, internal micrometer three points, etc.
2. Measure various gauges according to GB, ISO, BS, ANSI, DIN, JIS, API standards. With comprehensive and professional standards in database, it meets requirements of most customers.
3. Conform to a variety of verification regulations & measuring standards. All test results are generated according to relevant regulations and standards.
4. User-friendly software.
5. With centralized database management for measuring records, the operator can query and manage the measuring records according to object type, testing institution, manufacturing number, inspector, submitted institution, equipment number, inspection date and effective date.
6. Support to print multiple selected test records or test certificates from database at once time.
7. Support to export test data to Word, Excel, PDF files.
8. Data backup and restore.
9. Support user-defined template of report.
10. Support user-defined standard/tolerance.

Main Accessories



Workholder for taper gauge




Workholder for gauge block



Workholder for micrometer



One-coordinate floating table



V-shaped block



Five-axis object table



Workholder for micrometer 3 points



Measuring jaw



Inside measuring device



Ruby probes





Plain/Blade anvil



Spherical anvil & Measuring bar

Software

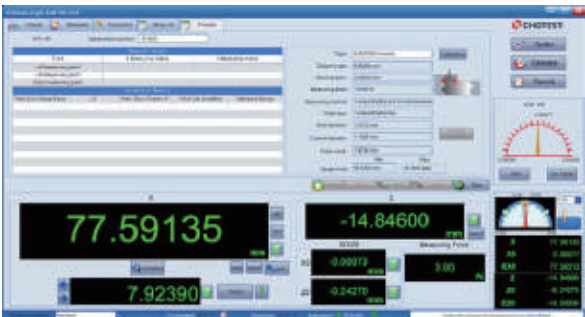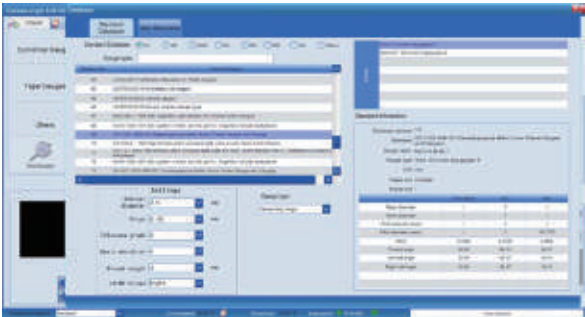

Parameters

Model No.		SJ5100-UP300	SJ5100-UP600	SJ5100-UP1000
Absolute measurement	External Range	0-340mm	0-640mm	0-1040mm
	Internal Range	0.7~200mm	0.7~500mm	0.7~900mm
Indication Error		$\pm(0.09+L/1500)\mu\text{m}$ (Note: L is measured length in mm)		
Repeatability (2s)		$\leq 0.06\mu\text{m}$		
Resolution		0.01 μm		
Max Pitch Diameter		200mm(Ring)/250mm(Plug)		
Measuring Force		0.1N, 0.3N, 0.5N, (1~10)N continuously adjustable by hand		
Operation Environment		20 $\pm$ 0.5 $^{\circ}\text{C}$, fluctuation $\leq$ 0.2 $^{\circ}\text{C}$ /hour, Relative Humidity: 20~60%		
Dimension		1400 $\times$ 400 $\times$ 450mm	1400 $\times$ 400 $\times$ 450mm	1700 $\times$ 400 $\times$ 450mm
Weight		150kg	150kg	180kg
Five-axis Object Table	Z-axis Range	0~50mm		
	Y-axis Range	$\pm 25\text{mm}$		
	X-axis Floation	$\pm 10\text{mm}$		
	Z-axis Rotation	$\pm 3^{\circ}$		
	Y-axis Yaw	$\pm 3^{\circ}$		
	Loading capacity	$\leq 30\text{kg}$		
Dimension		350mm $\times$ 125mm		

Model No.		SJ5100-300A/B	SJ5100-600A/B	SJ5100-1000A/B	SJ5100-1500A/B	SJ5100-2000A/B	SJ5100-3000A/B
Absolute measurement	External Range	0~340mm	0~640mm	0~1040mm	0~1540mm	0~2040mm	0~3040mm
	Internal Range	0.7~200mm	0.7~500mm	0.7~900mm	0.7~1400mm	0.7~1900mm	0.7~2900mm
Indication Error		A series: $\pm(0.12+L/1000)\mu\text{m}$; B series: $\pm(0.20+L/1000)\mu\text{m}$ (Note: L is measured length in mm)			A series: $\pm(0.25+L/1000)\mu\text{m}$; B series: $\pm(0.4+L/1000)\mu\text{m}$ (Note: L is measured length in mm)		
Repeatability (2s)		A Series $\leq$ 0.08 μm ; B Series $\leq$ 0.10 μm			A Series $\leq$ 0.15 μm ; B Series $\leq$ 0.20 μm		
Resolution(μm)		0.01 μm					
Max Pitch Diameter(mm)		200 mm(Ring)/250mm(Plug)					
Measuring Force		0.05N, 0.1N, 0.3N, 0.5N, (1~10)N continuously adjustable by hand					
Operation Environment		A series: 20 $\pm$ 1 $^{\circ}\text{C}$, fluctuation $\leq$ 0.2 $^{\circ}\text{C}$ /hour, Related Humidity: 20~60% B series: 20 $\pm$ 2 $^{\circ}\text{C}$, fluctuation $\leq$ 0.5 $^{\circ}\text{C}$ /hour, Related Humidity: 20~60%					
Dimension(mm)		1400×400×450	1400×400×450	1700×400×450	2200×400×450	2700×400×450	3700×400×450
Weight		150kg	150kg	180kg	310kg	360kg	410kg
Five-axis object table	Z-axis Range	0~50mm					
	Y-axis Range	$\pm$ 25mm					
	X-axis Floation	$\pm$ 10mm					
	Z-axis Rotation	$\pm$ 3 $^{\circ}$					
	Y-axis Yaw	$\pm$ 3 $^{\circ}$					
	Loading Capacity	$\leq$ 50kg					
	Dimension	350mm×125mm					

SJ5200/SJ5500 Series Universal Thread Measuring Machines



SJ5200




SJ5500

Functions

1. Full-automatic measurement for comprehensive parameters of cylindrical thread plug gauges, cylindrical thread ring gauges, taper thread plug gauges, taper thread ring gauges, plain ring gauges, plain plug gauges and other gauges with internal & external dimensions, including virtual pitch diameter, single pitch diameter, basic pitch diameter, major diameter, minor diameter, thread pitch, thread angle, half of thread angle, flank straightness, lead angle, taper, etc.
2. Can measure trapezoidal thread gauges, buttress thread gauges, sawtooth thread gauges and other large-slope thread gauges.
3. Can measure comprehensive parameters of single thread and multiple thread.
4. Can measure various thread gauges according to GB, ISO, BS, ANSI, DIN, JIS, API standards. With comprehensive and professional thread standards in database, it meets requirements of most customers.
5. Automatically generate test report according to selected standard.
6. After once measurement, the software can calculate various parameters of thread and display data of any position, it also could generate the thread curve, relevant parameters and analysis chart automatically.
7. Measuring probe and workholder are identified automatically, which avoids collision of measuring probe caused by misoperation.
8. One-sided or two-sided measurement and analysis for gauges.
9. Controller for measuring pin positioning: with an easy-to-use buttons control box, the operation is more flexible.
10. User-friendly software, simple and easy-to-use.
11. Test results are saved automatically with name of measuring series number + size of measuring gauge + type of measuring gauge. With centralized database management for measuring records, the user can query and manage the measuring records according to object type, testing institution, manufacturing number, inspector, submitted institution, equipment number, inspection date, effective date, etc.
12. Can print multiple selected test records or test certificates from database at once time.
13. Can export test data to Word, Excel, AutoCAD (optional) files.
14. Data backup and restore.
15. Can output reports in a variety of formats in Word or PDF, moreover the report format can be customized.
16. Support user-defined standards.


SJ5200 Application

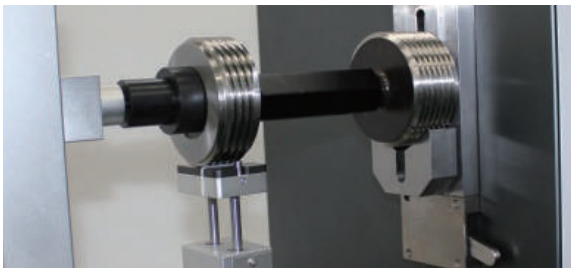

Thread plug gauge



Plain ring gauge

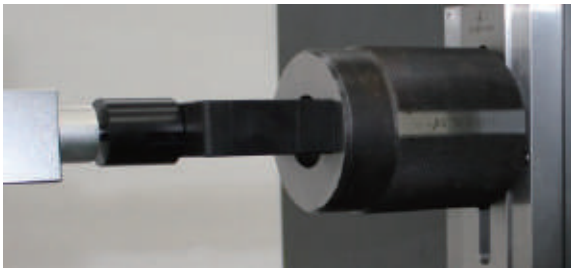

Taper plain ring gauge



Taper plain plug gauge

SJ5200 Parameters

Model No.	SJ5200-60	SJ5200-100	SJ5200-160
External measuring range	(1.0-50)mm	(1.0-90)mm	(1.0-150)mm
Internal measuring range	(2.5-60)mm	(2.5-100)mm	(2.5-160)mm
Max scanning range	60mm(Optional 75mm)	60mm(Optional 75mm)	60mm(Optional 75mm)
Min pitch	0.1mm	0.1mm	0.1mm
Weight	200kg	250kg	300kg
Size	1000×450×1000mm	1000×450×1000mm	1000×450×1130mm


Measurement Uncertainty

Cylindrical or Taper thread ring gauge(Minor diameter>2.5mm,half of thread angle≥27°)			
Minor diameter(μm)	2.5 + L/200	2.5 + L/200	2.5 + L/200
Actual pitch diameter(μm)	2.5 + L/200	2.5 + L/200	2.5 + L/200
Pitch(μm)	0.75 + L/200	0.75 + L/200	0.75 + L/200
Cylindrical or Taper thread plug gauge(Major diameter>1mm,half of thread angle≥27°)			
Major diameter(μm)	2.0 + L/200	2.5 + L/200	2.5 + L/200
Actual pitch diameter(μm)	2.0 + L/200	2.5 + L/200	2.5 + L/200
Pitch(μm)	0.75 + L/200	0.75 + L/200	0.75 + L/200
Cylindrical or Taper plain gauge(Diameter from 1mm to 10mm)			
Diameter(μm)	1.5 + L/200	2.0+ L/200	2.0+ L/200
Cylindrical or Taper plain gauge(Diameter>10mm)			
Diameter(μm)	1.0+ L/200	1.5+ L/200	1.5+ L/200

SJ5500 Application



Thread plug gauge

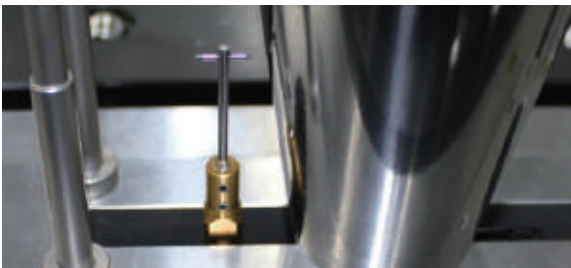

Taper plain plug gauge



API gauge



API gauge

SJ5500 Parameters

Model No.	SJ5500-200	SJ5500-300	SJ5500-400	SJ5500-500	SJ5500-600
External measuring range	(1.0-250)mm	(1.0-350)mm	(1.0-450)mm	(1.0-550)mm	(1.0-620)mm
Internal measuring range	(2.5-250)mm	(2.5-350)mm	(2.5-450)mm	(2.5-550)mm	(2.5-620)mm
Max scanning range	250mm				
Min pitch	0.1mm				
Weight	2000kg				
Size	2000×900×910mm				

Measurement Uncertainty

Cylindrical or Taper thread ring gauge(Minor diameter>2.5mm,half of thread angle≥27°)	
Minor diameter(μm)	3.0 + L/200
Actual pitch diameter(μm)	3.0 + L/200
Pitch(μm)	0.8 + L/200
Cylindrical or Taper thread plug gauge(Major diameter>1mm,half of thread angle≥27°)	
Major diameter(μm)	2.9 + L/200
Actual pitch diameter(μm)	2.9 + L/200
Pitch(μm)	0.8 + L/200
Cylindrical or Taper plain gauge(Diameter from 1mm to 10mm)	
Diameter(μm)	2.0 + L/200
Cylindrical or Taper plain gauge(Diameter>10mm)	
Diameter(μm)	2.0 + L/200

SJ2018/2620 Automated Dial Indicator Testing Machines

Precision, Versatile, Efficient



Functions

1. Measure dial indicators, micrometer dial indicators, dial test indicators, dial bore indicators, automatically according to the relevant regulations and standards.
2. Measure the above gauges with digital display automatically.
3. Measure the above gauges with imperial system automatically.
4. Support semi-auto testing mode.
5. Automatic zeroing after click "Start".
6. Overtolerance hinting during measuring process.
7. Process and qualify the measured data automatically.
8. Can search and manage the test records according to object type, manufacturer, serial No., inspector, applicant, equipment No., inspection date or effective date etc.
9. Can print or export former test records including error sheet or curve.
10. Can print or export multiple selected test records from database once time.
11. Can export test data in CSV, EXCEL, WORD.
12. Data backup and restore.
13. Can customize format of test report according to requirements of customer.
14. Support user-defined testing program and tolerance.

Parameters

Model No.	SJ2018	SJ2620
Measuring range	(0-50)mm	
Resolution	0.01μm	
Repeatability	0.1μm	
Reading accuracy	1/60 of division value for Resolution 0.01mm dial indicator 1/30 of division value for Resolution 0.001mm dial indicator	
Indication Error	Random 1mm≤0.6μm Random 2mm≤0.6μm Random 10mm≤0.8μm Random 30mm≤0.9μm 50mm≤1μm	
Hysteresis	≤0.5μm	
Interface	RS232 (Can convert to USB)	
Input voltage	AC100~240V , 50~60Hz	
Operating environment	Temp.(20±2)°C , RH(50~70)%	
Dimension	640×240×530mm	300×235×640mm
Weight	35kg	

Application



Digital dial indicator



Dial test indicator



Dial bore indicator




Mechanical comparator

SJ2100

Automated Dial Indicator Testing Machines

Large measuring range (0-100)mm

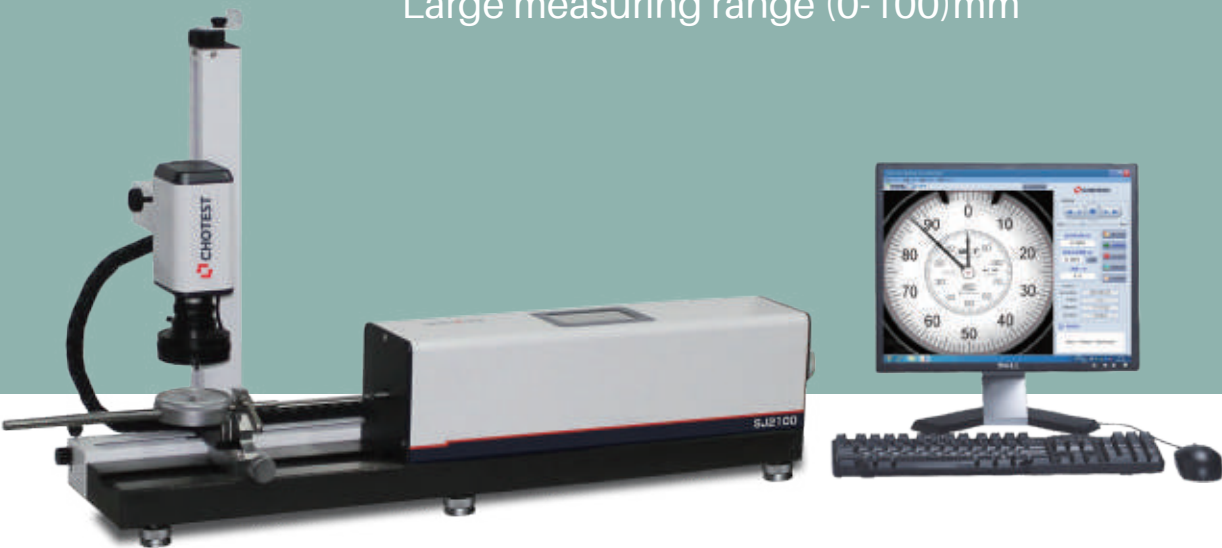

Parameters

Model No.	SJ 2100
Measuring Range	(0-100)mm
Resolution	0.1μm
Repeatability	0.1μm
Reading Accuracy	1/60 of division value for Resolution 0.01mm dial indicator 1/30 of division value for Resolution 0.001mm dial indicator
Indication Error	Random 1mm≤1μm, Random 2mm≤1μm, Random 10mm≤1.5μm Random 30mm≤2μm, Random 50mm≤2.5μm, 100mm≤4μm
Hysteresis	≤0.5μm
Interface	RS232 (Can convert to USB)
Input Voltage	AC100~240V, 50~60Hz
Operating Environment	Temp. (20±2)°C, RH(50~70)%
Dimension	700×205 ×165mm
Weight	30Kg

Workholder for plunger dial indicator

Item No.: SJ20D,SJ20A
Function: For testing of regular dial indicators
Stem diameter of indicator: Φ8mm



Workholder for lever-type indicator and bore dial indicator

Item No.: SJ20B
Function: For testing of dial test indicators and dial bore indicators
Stem diameter of indicator: Φ4, Φ6, Φ8mm(dial test indicators); Φ6~Φ28mm(dial bore indicators)



Extension bar for camera

Item No.: SJ22
Function: For testing of dial bore indicators with long stem



Three balls object table

