



KOSEIDOTM

高精度

PRECISION YOU CAN TRUST

VIDEO MEASURING SYSTEMS

ADVANCED MEASUREMENT.
PERFECT RESULTS.



**HIGH
ACCURACY**

Advanced optics &
precision mechanics



**PRECISE
MEASUREMENT**

Consistent results
you can trust



**HIGH
EFFICIENCY**


User-friendly operation
for faster inspection



**DURABLE &
RELIABLE**

Built for long-term
performance

OUR PREMIUM MEASURING SOLUTIONS

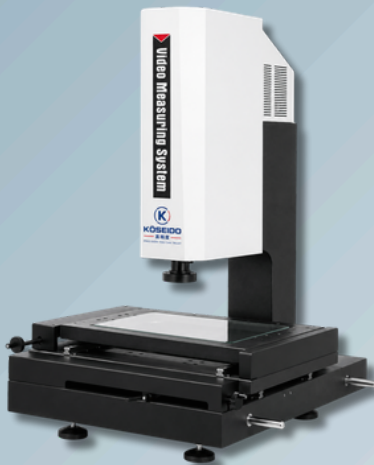

Manual Video Measuring System



Semi-Automatic
Video Measuring System



Fully Automatic
Video Measuring System

PRECISION MEETS PERFORMANCE

Koseido delivers world-class video measuring solutions designed for accuracy, efficiency and reliability across every industry.



ENGINEERED
FOR TODAY



PERFORMANCE
DRIVEN



QUALITY
FOCUSED



TRUSTED
WORLDWIDE



High Precision Semi-automatic Vision Measuring Machine

K-M6-iSemi Series



Product Characteristic:

- Adopt high-precision granite base and column to ensure the stability and precision of the machine;
 - Adopt high-precision toothless polished rod and fast-moving locking device to ensure that the return error of the table is within 2um;
 - Adopt high-precision instrument optical ruler and precision worktable to ensure the accuracy of the machine is within $\leq 2.5+L/200\mu\text{m}$;
 - Adopt high-definition zoom lens and high-resolution color digital camera to ensure clear picture quality without distortion;
 - Using the program-controlled surface 4-ring 8-area LED cold illumination and Contour LED Parallel Illumination as well as a built-in intelligent light adjustment module, the area brightness of the light in the 4-ring 8-area can be freely controlled;
 - iMeasuring Vision measurement software improves quality control to a new level;
 - The Z-axis uses high-precision linear guides and servo motor control system to achieve automatic focusing, eliminate human focusing errors, and improve measurement accuracy and stability;
 - Optional contact probe and three-dimensional measurement software can be used to upgrade the machine to a contact three-dimensional measuring machine.
-

Specifications:

Commodity		High Precision Semi-automatic Vision Measuring Machine K-M6-iSemi Series				
Model		K-M6-IMS-2010	K-M6-IMS-2515	K-M6-IMS-3020	K-M6-IMS-4030	K-M6-IMS-5040
Marble Workbench		(270*350)mm	(408*308)mm	(458*358)mm	(608*470)mm	(650*580)mm
Glass Workbench		(142*242)mm	(306*198)mm	(356*248)mm	(456*348)mm	(540*440)mm
X/Y axis Travel		(200*100)mm	(250*150)mm	(300*200)mm	(400*300)mm	(500*400)mm
Z axis travel		High-precision linear guide, effective travel 200mm				
X/Y/Z axis resolution		0.5um				
Pedestal and Uprights		High Precision Granite				
Measurement Accuracy*	E1x,y	2.5+L/200(um)				
	E1xy	3+L/200(um)				
	E1z	4+L/200(um)				
Repeat Accuracy		2um				
Illumination System (Software Adjustment)		Surface 4 rings and 8 zones infinitely adjustable LED cold illumination				
		Contour LED Parallel Illumination				
		Optional Coaxial Light				
Digital Camera		1/2.9"/1.6Mpixel High Resolution Digital Camera				
Zoom Lens		6.5X High-Resolution Electronic feedback zoom lens, Optical Magnification: 0.7X~4.5X ; Video Magnification: 20X~129X				
Measuring Software		iMeasuring				
Operation System		Support WIN 10/11-32/64 Operating System				
Language		English				
Working Environment		Temperature 20°C±2°C, temperature change <1°C/Hr; Humidity 30%~80%RH; Vibration <0.02g's, ≤15Hz.				
Power Supply		AC220V/50Hz; 110V/60Hz				
Dimension(WxDxH)		(677*552*998)mm	(790*617*1000)mm	(838*667*1000)mm	(1002*817*1043)mm	(1111*867*1086)mm
Packaging Dimension(WxDxH)		(1030*780*1260)mm	(1030*780*1260)mm	(1030*780*1260)mm	(1130*1000*1270)mm	(1250*1035*1460)mm
Gross/Net Weight		220/150Kg	242/175Kg	275/185Kg	449/350Kg	550/380Kg

Note:

- "L" represents the measured length in millimeters, and the mechanical accuracy of the Z-axis is highly dependent on the focusing accuracy and the surface of the workpiece.
- The magnification is an approximate value and is closely related to the size and resolution of the display.

- Customers can choose to add a 0.5X or 2X auxiliary lens according to their needs to achieve image magnification.
- K-M6-iMS-2010/4030/5040 are workbenches made of marble, while K-M6-iMS-2515/3020 are workbenches made of metal.

Product Configuration Model Description (Example with K-M6-iMS-3020):

Sensor Configuration	2.5D	3D	2.5D	3D
Commodity	2.5DVision Measuring Machine	3D Contact & Vision Measuring Machine	2.5D Semiautomatic Vision Measuring Machine	3D Semiautomatic Contact & Vision Measuring Machine
Model	K-M5-iMS-3020A	K-M5-iMS-3020B	K-M6-iMS-3020C	K-M6-iMS-3020D
Type	A	B	C	D
Significance	Optical Zoom-lens Sensor	Zoom-lens Sensor and Contact Probe Sensor	Zoom-lens Sensor and Z- axis Autofocus Function	Zoom-lens Sensor, Contact Probe Sensor and Autofocus Function
Z-axis Auto-focus	Without	Without	With	With
Contact Probe	Without	With	Without	With
Software	iMeasuring2.1	iMeasuring3.1	iMeasuring2.2	iMeasuring3.2

Manual Vision Measuring Machine Travel Guide Table:

Travel mm	Model	X Axis Travel mm	Y Axis Travel mm	Z Axis Standard Travel mm	Z Axis Maximum Customized Travel mm
200x100x200	K-M6-IMS-2010	200	100	200	300
250x150x200	K-M6-IMS-2515	250	150	200	300
300x200x200	K-M6-IMS-3020	300	200	200	400
400x300x200	K-M6-IMS-4030	400	300	200	400
500x400x200	K-M6-IMS-5040	500	400	200	400

- ◆ Other travel specifications can be customized according to customer needs



KOSEIDOTM

高精度

PRECISION YOU CAN TRUST

AUTHORISED DISTRIBUTOR



PARTNERING FOR
PRECISION.
DELIVERING TRUST.

Your trusted source for advanced
Vision Measuring Solutions.



9212012856
CALL US



9350076343
CALL US



sandeep@bhagwatimail.com
EMAIL US



ISO:9001:2015
CERTIFIED



www.bhagwathardware.com
VISIT OUR WEBSITE

