

The measure
of all things



MECHANICAL AND ELECTRONIC LENGTH MEASURING INSTRUMENTS FOR INTERNAL AND EXTERNAL MEASUREMENTS

FOR MORE INFORMATION PLEASE CONTACT:



BHAGWATI
Hardware & Mill Store Since 1976
Address: 4769, 1st Floor, Old Post Office Building,
Hauz Qazi, Delhi - 110006
Mobile: 9212012856, 9350076343
Website: www.bhagwathardware.com
www.bhagwathardwaredelhi.in
E-mail: sendeep@bhagwatimail.com

AN ISO 9001 : 2015 CERTIFIED COMPANY

Measurement of foamed material and foils

Application range up to 100 mm



K110T



D110T




K220T



D220T



K330T

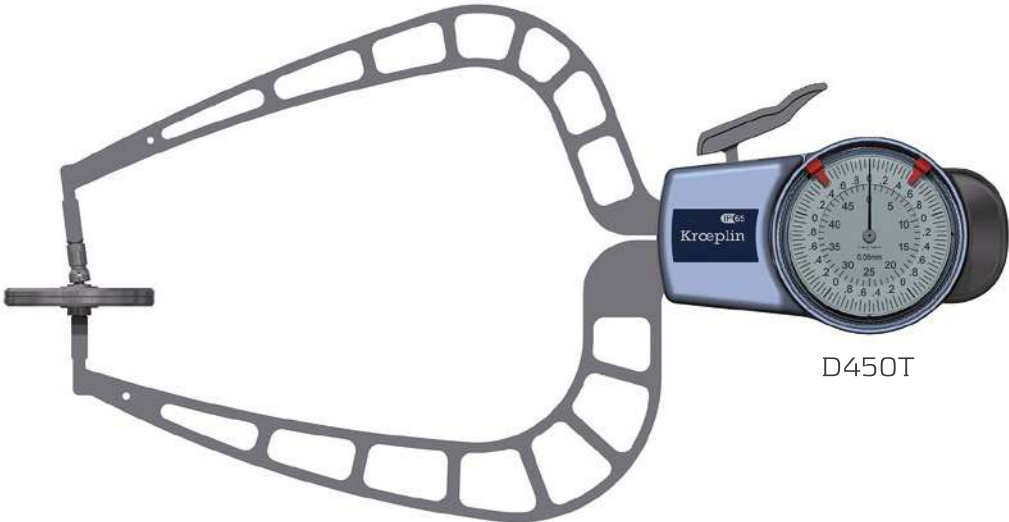


D450T

	Measuring span Mes	Measuring range Meb	Range of indication Azb	Numerical interval Zw Scale interval Skw	Permissible errors G	Repeatability limit r	Measuring force $F_{\min}$	Measuring force $F_{\max}$	Weight	Protection class	Measuring contact movable Hb	Measuring contact fixed Hf	Type of measuring contact	Measuring depth L max.	Picture	Electronic E Mechanical M	Wooden box
Type	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[N]	[N]	[g]		[mm]	[mm]	[mm]	[mm]			
K110T	10	0-10	0-10,5	0,005	0,02	0,005	0,8	1,2	265	IP67	21,7	14,8	Flat Ø 6	35	[12]	E	1732-65
D110T	10	0-10	0-10,5	0,005	0,02	0,005	0,8	1,2	175	IP65	21,7	14,8	Flat Ø 6	35	[12]	M	1732-45
K220T	20	0-20	0-20,5	0,01	0,04	0,01	1,1	1,6	310	IP67	28,2	20,7	Flat Ø 10	85	[12]	E	1732-65
D220T	20	0-20	0-20,5	0,01	0,04	0,01	1,1	1,6	220	IP65	28,2	20,7	Flat Ø 10	85	[12]	M	1732-45
K330T	30	0-30	0-30,5	0,01	0,06	0,04	0,9	1,6	430	IP67	36	24	Flat Ø 50	116	[14]	E	1732-71
K450T	50	0-50	0-50,5	0,01	0,06	0,04	0,8	1,7	500	IP67	36	24	Flat Ø 50	167	[14]	E	1732-71
D450T	50	0-50	0-50,5	0,05	0,1	0,05	0,8	1,7	440	IP65	36	24	Flat Ø 50	167	[14]	M	1732-51
K4100T	50	50-100	49,5-100,5	0,01	0,06	0,04	0,8	1,7	520	IP67	36	17	Flat Ø 50	167	[14]	E	HK
D4100T	50	50-100	49,5-100,5	0,05	0,075	0,05	0,8	1,7	450	IP65	36	17	Flat Ø 50	167	[14]	M	HK
K8100T	100	0-100	0-101	0,05	0,15	0,1	0,8	1,8	670	IP67	39	7	Flat Ø 50	375	[14]	E	HK
D8100T	100	0-100	0-101	0,1	0,15	0,1	0,8	1,8	610	IP65	39	7	Flat Ø 50	375	[14]	M	HK
C12100T	100	0-100	0-101	0,1	0,3	0,2	1,6	2,2	1000	-	34	14	Flat Ø 50	550	[14]	E	HK
D12100T	100	0-100	0-101	0,1	0,3	0,2	1,6	2,2	1100	-	34	14	Flat Ø 50	550	[14]	M	HK

Measuring contacts



Flat Ø 6 mm
Flat Ø 10 mm

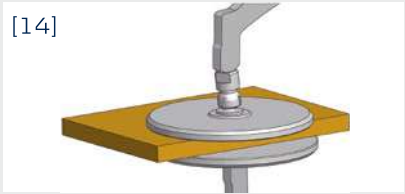

Flat Ø 50 mm

Measuring capacity

